

TESTING CORD ASSEMBLIES


3-CONDUCTOR CORDS

W3A THROUGH W3Y

DESCRIPTION

→W3A←

12 feet long

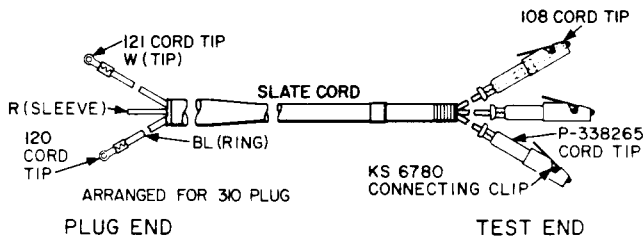


Res 0.21 Ω/ft

The code of the cord includes one 120 cord tip, one 121 cord tip, three KS-6780 connecting clips, and three 108 cord tips. The cord was initially intended for use as a test cord in test set for 200-point line finder.

W3F

4 or 10 feet long (Unless otherwise specified, a 10-foot cord shall be furnished.)

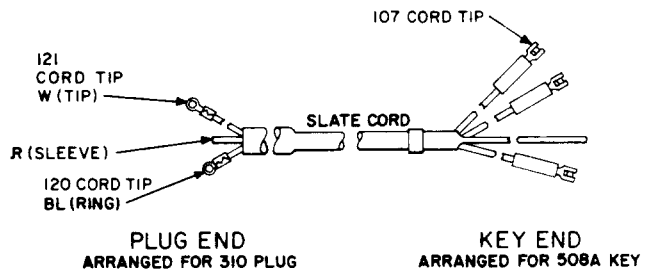


Res 0.21 Ω/ft

The code of the cord includes three 107 cord tips, one 120 cord tip, and one 121 cord tip. The cord was initially intended for use in 32A, 54A, and B test sets.

W3B

6 feet 6 inches long

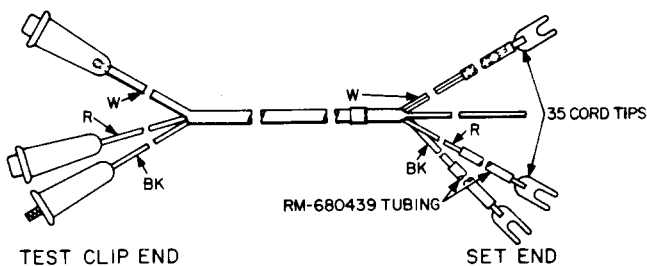


Res 0.01 Ω/ft

The code of the cord includes three 35 cord tips, three Mueller 27 test clips, and three Mueller 29 insulators. The cord was initially intended for use with test set for 200- and 206-type selectors.

W3K

4 or 6 feet long (Unless otherwise specified, a 6-foot cord shall be furnished.)

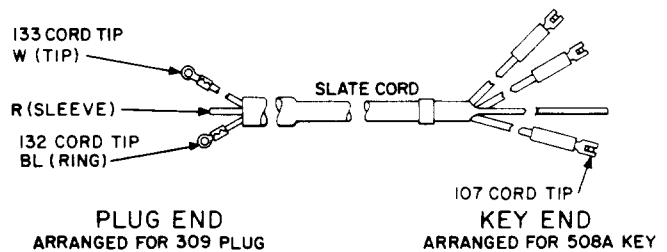

Res 0.21 Ω/ft


The code of the cord includes a 132 cord tip, a 133 cord tip, and three 107 cord tips. The cord was initially intended for use in 32B, 54A, and B test sets.

W3E

MFR DISC

→W3M←

6 and 15 feet long (Unless otherwise specified, a 6-foot cord shall be furnished.)

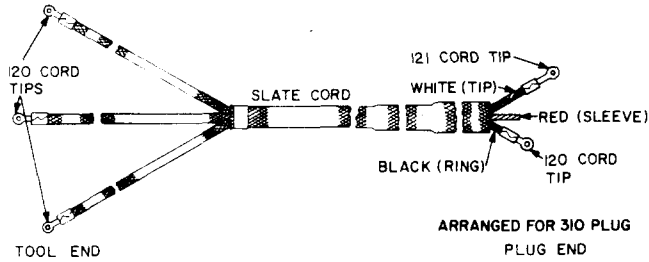


Res 0.21 Ω/ft

The code of the cord includes four 120 cord tips and one 121 cord tip. When equipped with 360-type tools, the 360A, B, and C will be connected to the red, black, and white conductors, respectively.

→W3N←

6 feet long

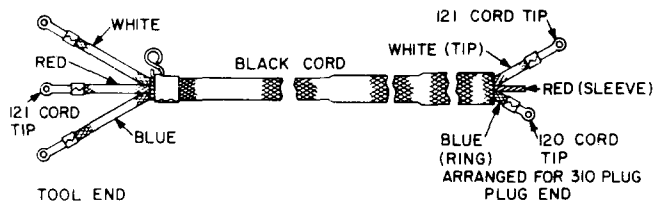


Res 0.21 Ω/ft

The code of the cord includes four 121 cord tips and one 120 cord tip.

→W3R←

6 feet long

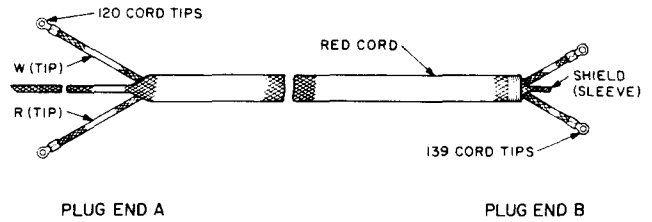


Res 0.21 Ω/ft

The code of the cord includes two 120 cord tips and two 139 cord tips. Plug end A is arranged for a 308A plug and plug end B for a 305A plug. When ordered equipped with plugs, the white conductor will be connected on the notched side of the 308A plug and to the tip on the notched side of the 305A plug, the red conductor to the other side of the 308A plug and to the other tip of the 305A plug, and the shield to the sleeve of the 305A plug. The cord was initially intended for high-frequency testing equipment for type J and K Carrier Systems.

→W3W←

6 feet long

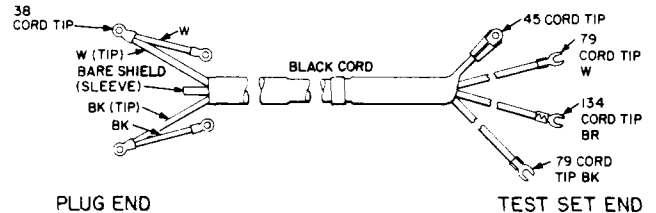


Res 0.006 Ω/ft

The code of the cord includes one 45 cord tip, one 134 cord tip, two 79 cord tips, and four 38 cord tips. The plug end is finished for a 315A plug. When equipped with a plug, the black conductor will be connected to the tips on the locating finger side of the plug, the white conductor to the other tips, and the shield to the sleeves. The cord was initially intended for use with type K Carrier Telephone System in the bypass set circuit (J68743-2).

→W3Y←

19 feet 6 inches long

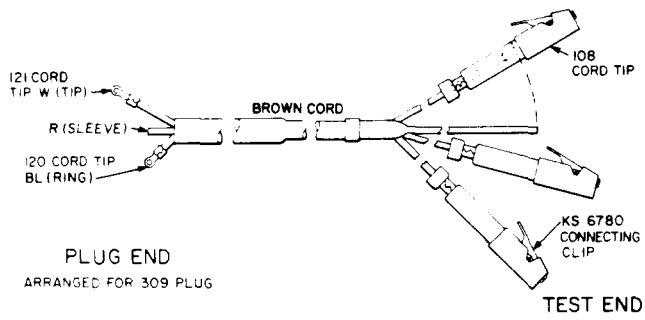

PLUG END

ARRANGED FOR 309 PLUG

TEST END

Res 0.21  $\Omega$ /ft

The code of the cord includes one 121 cord tip, one 120 cord tip, three KS-6780 connecting clips, and three 108 cord tips.