

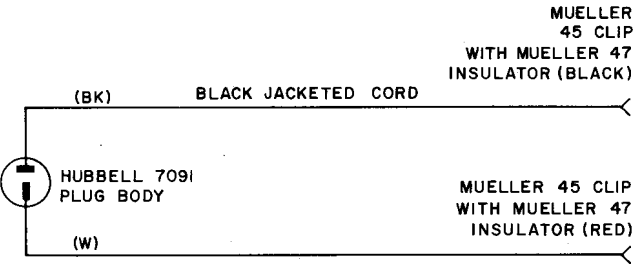
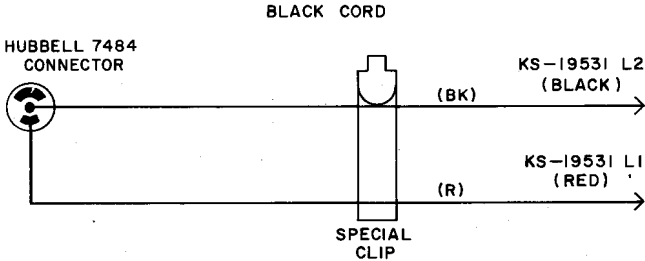


TESTING CORD ASSEMBLIES
2-CONDUCTOR CORDS
MISCELLANEOUS
DESCRIPTION

<p>M2CG "Mfg Disc."</p> <p>Recommended replacement cord is the M2FE cord.</p>	<p>M2ER</p> <p>6 feet and 11 feet long. (unless specified in order, 6 foot lengths shall be furnished.)</p>  <p>The Set End is equipped with a 444A plug and the switch end is equipped with a 261A type switch. The cord initially was intended for use with the AE1 and AE2 type telephone bases in the No. 3A (hospital) Communication System.</p>
<p>M2DS</p> <p>50 ft long</p> <p>Res. 0.006 Ω/ft</p>  <p>The code of the cord includes one No. 7091 Hubbell plug body, two No. 45 Mueller clips, and two No. 47 Mueller insulators, one red and one black.</p>	<p>M2ES</p> <p>Res. 0.006 Ω/ft</p> <p>5 feet 6 inches long</p>  <p>The code of the cord includes one Hubbell No. 7484 connector, one KS-19531 L1 (red) plug, and one KS-19531 L2 (black) plug. A special clip is attached for supporting the cord. The cord was intended initially for use with the 124A test set in the No. 101 ESS.</p>

M2FE

10 inches long

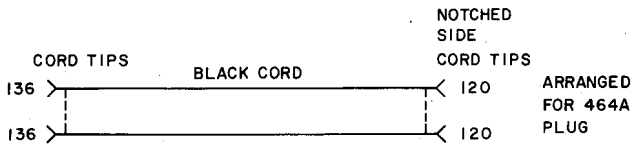

The code of the cord includes two 136 cord tips and two 120 cord tips and is arranged for a 464A type plug. The cord initially was intended for use with a No. 2A Noise Measuring Set. Recommended in place of the M2CG cord

D-172112

“Mfr Disc.”

D-175432

“Mfr Disc.”