

PATCHING CORD ASSEMBLIES
4-CONDUCTOR CORDS
4P25A THROUGH 4P27A
DESCRIPTION

1. GENERAL

1.01 This section lists and illustrates the coded 4-Conductor Patching Cord Assemblies.

1.02 This section is reissued to add the 4P27A cord.

The Equipment Test List is not affected.


2. DESCRIPTION OF PATCHING CORD ASSEMBLIES

4P25A—MFR DISC.

4P26A

1 P4AY, 8 feet long, equipped with:

- 1 425A plug
- 1 234 plug

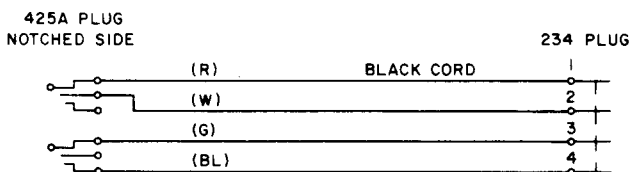

Res 0.21 Ω /ft


The 4P26A cord includes two 140 cord tips, four 135 cord tips, and two 133 cord tips. The cord was initially intended for use at IDF No. 4 Type Toll Switching Offices.

4P27A

Res 0.21 Ω /ft

1 P4BC cord; 19 feet 6 inches long, equipped with:

- 1 464C plug
- 1 234B plug

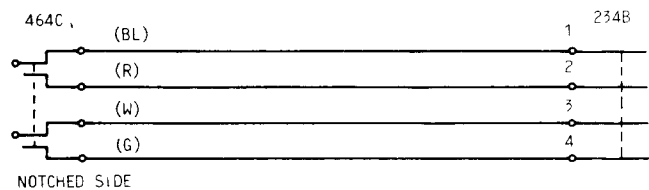

The initial use is in step-by-step offices with solderless wrapped 150- and 183-type terminal strips.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement