

HAND TELEPHONE SETS — 211J, L
HANGUP TYPE — COMMON BATTERY — CONNECTIONS
WITH NETWORK TYPE SUBSCRIBER SETS

1.00 INTRODUCTION

This section covers the combination of apparatus, circuit diagram, and connections for the 211J and L hang-up type hand telephone sets when used with network type subscriber sets for manual or dial common battery service.

2.00 GENERAL

2.01 The 211J and L types may be used for all classes of service except in dial central offices where the party-on-tip station of 2-party service requires a message rate and tip party identification feature.

2.02 The 211L type has the standard dial number plate with black letters and red numerals.



FIG. 1—211-TYPE MANUAL FIG. 2—211-TYPE DIAL

TABLE A
COMBINATION OF APPARATUS

| Hand Tel. Set Code | Components | | | | |
|--------------------------|----------------|------------------|-------------------------|---------------|--------------|
| | Handset | Handset Mounting | Dial or Apparatus Blank | Dial Mounting | Handset Cord |
| 211J-3 (As furnished) | G1A-3 | G6-3 | Number Card Holder | 43A-3 | H-4 |
| 211J-3 (Modified) | F4A-3 | | | | H-3 |
| 211J-3 (Modified) | F1A-3 F1G-3 | | | | H-3 |
| 211L-3 (As furnished) | G1A-3 | | 6A | | H-4 |
| 211L-3 (Modified) | F4A-3 | | 5H or 6A | | H-3 |
| 211L-3 (Modified) | F1A-3 F1G-3 | | 5H or 6A | | H-3 |

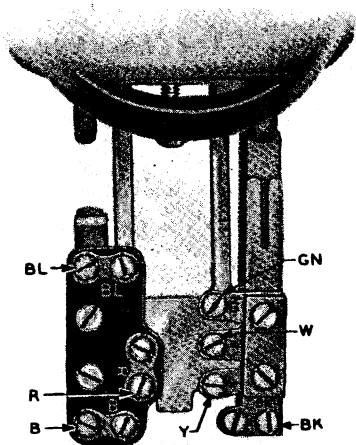


FIG. 3—G6 HANDSET MOUNTING TERMINALS

| | | Class of Service | Sub. Set |
|---|---|---|----------|
| TABLE B | Individual Lines | 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations | 685A |
| | 2-Party Flat Rate* | | |
| | 2-Party Message Rate (Manual and Dial Ring Party Only)* | | |
| | 4-Party Semiselective | | |
| | Multiparty Divided Code | | |
| 4-Party Full Selective | 686A | | |
| 8-Party Semiselective | | | |
| *No message rate or tip party identification can be provided for party-on-tip stations. | | | |

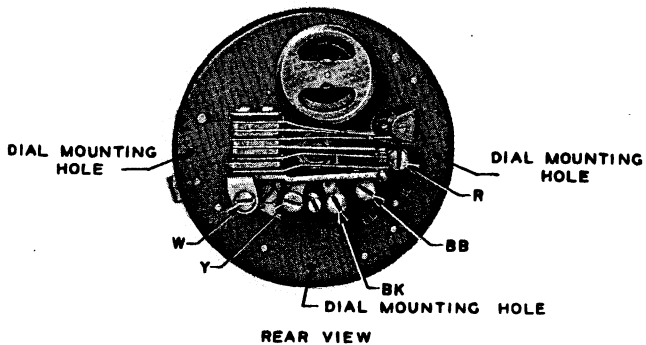


FIG. 4—5H-TYPE DIAL






FIG. 5—6A-TYPE DIAL

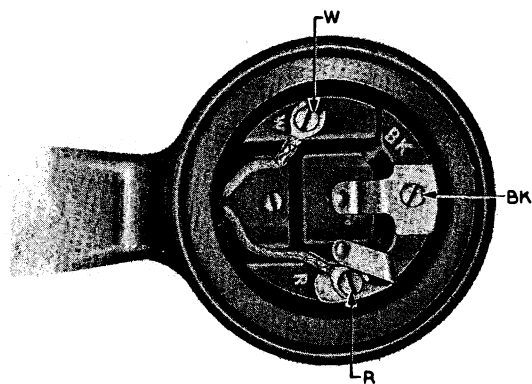


F1- AND F4-TYPE

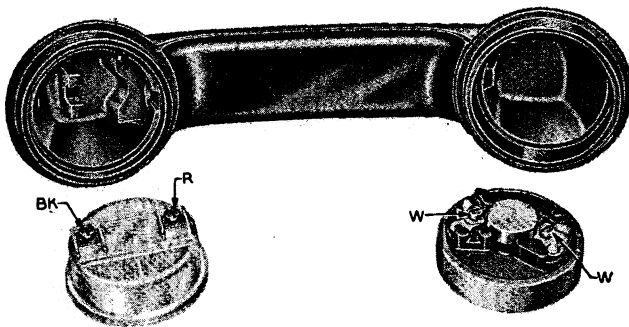

G1-TYPE

FIG. 6—HANDSETS

3.00 CIRCUIT DIAGRAM

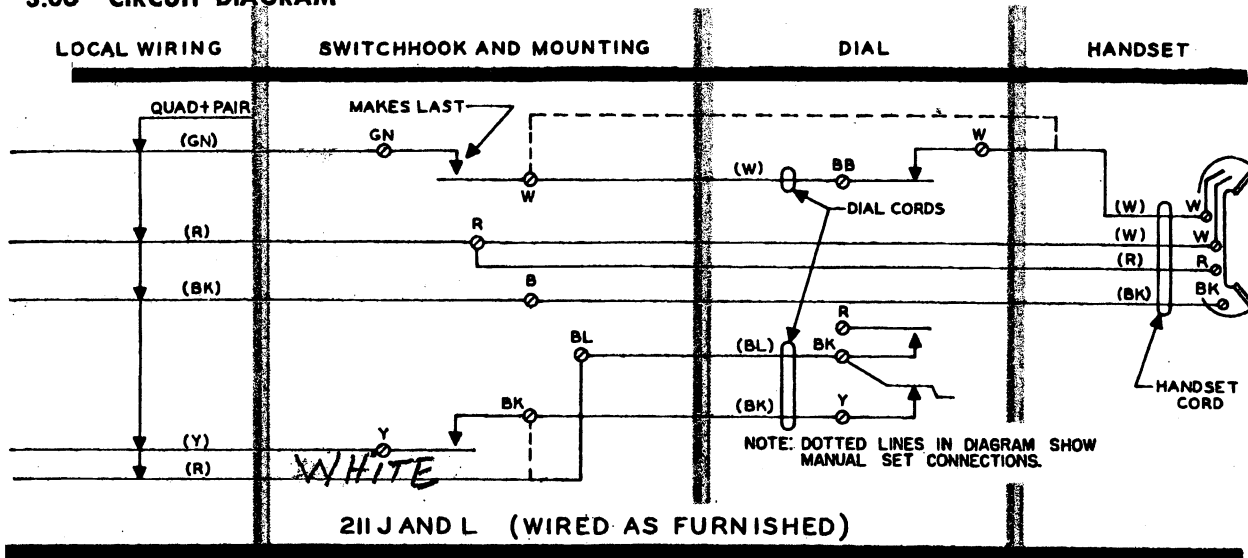

3.01 The 211-type set is arranged for, but not equipped with, a 61M filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the switchhook and connect filter as shown in Fig. 7.

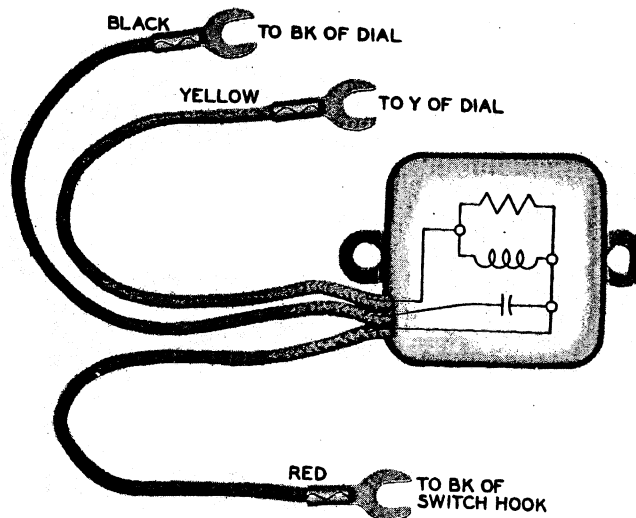


FIG. 7—61M FILTER CONNECTIONS

Note: If the filename has been corrupted, this section is 502-302-403. The pre-plant series section number would be C38.343. 502-302-403 is a more accurate number however since p. 1 of the BSP says "Plant Series". Originally this section was thought to be C38.341 / 502-302-402 however that is likely erroneous.

-- Sam Etlar, 2010-07-04