
CODED TOOLS

NO. 463A TO 449A

DESCRIPTION


TOOL, 436A



Heelpiece adjusting tool.

For use on step-by-step type relays.


TOOL, 441A



Cutover tool.

For use for cutover purposes in step-by-step office for holding open the contacts of K type (cut-off) relays.

TOOL, 442A



Multiple inspection lamp. Equipped with a W2AL cord, two No. 360A tools and two test clips. Arranged for but not furnished with an A2 lamp. A B1 lamp may be used if greater illumination is required.


For use in repairing skinners and multiple jack connections.

TOOL, 443A

Replaces the D-87336 tool.

Cord shelf connecting tool. Furnished with A W3N cord and a No. 310 plug.


For use in making connections to cord circircuits in local and toll switchboards.

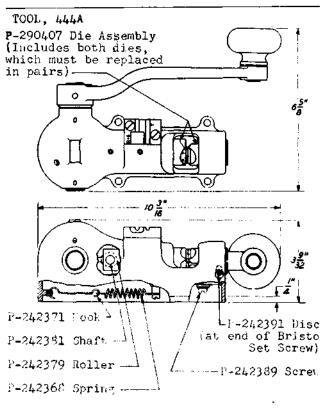

Cord tip press.

For use in repairing switchboard cords by the solderless cord tip named.

TOOL, 445A

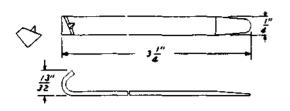


Dial card holder tool.

For use on 2, 4 and 5 type dials.

TOOL, 446A Manufacture Discontinued

TOOL, 447A

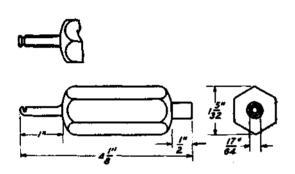


Protector wrench and adjuster.

Replaces the No. 28 tool.

For use on protector mountings and 444 type jacks.


TOOL, 448A

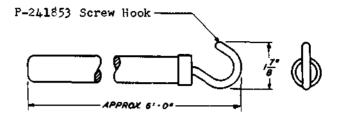

Cross-connection wire puller.

For use in pulling cross-connection wires through distributing frames.

TOOL, 449A

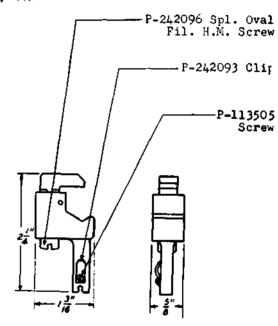

Cord holding detail.

Replaces cord holding detail R-1648, detail 2. For use on vertical drive shafts.