TOOLS

CLEANERS III - DESCRIPTION

1. GENERAL

- 1.01 This section covers noncoded Bell System cleaner tools.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-580-101, 074-755-101, and 074-800-101.
- 1.04 See tool index for other Cleaner practices. Also see Brushes, Section 074-205-138.

CLEANER, VACUUM, KS-14410 L2


(Includes L11 hose, L20 adapter and L22 filter cones. Order other attachments by list number given.)

When ordering hose, cleaning attachments, carriage, or adapters, use the following wording, Attachments L12 to L19 inclusive may be ordered as a set by specifying L30. Adapter, KS-14410 L20 Adapter, KS-14410 L21 Attachments, Set. KS-14410 L30 Brush, Round, KS-14410 L19 Brush, Upholstery, KS-14410 L17 Carrige, KS-14410 L10 Cone, Filter, KS-14410 L22 (See Note) Hose, Suction, KS-14410 L11 Nozzle and Brush, Floor, KS-14410 L14 Nozzle, Crevice, KS-14410 L18 Nozzle, Upholstery, KS-14410 L16 Polisher, Floor, KS-14410 L15 Tube, Extension, Lower, KS-14410 L12 Tube, Extension, Upper, KS-14410 L13

Note: L22 provides one dozen filter cones.




Portable upright tank-type vacuum cleaner for use where heavy duty or silent type, such as KS-14377, is not required. It is approximately 11 inches in diameter and 13 inches high, exclusive of handle. Weight, without attachments, is approximately 17 pounds. It may be mounted on a rolling ladder by using a 32B ladder bracket. It is equipped with a three-wire 19-foot long KS-14410 L31 power cord. For general use.

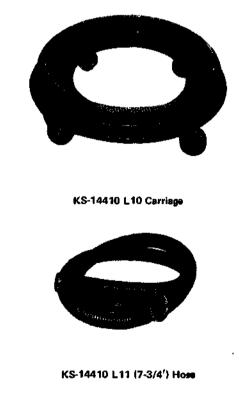


NOTICE Not for use or disclosure outside the Bell System except under written agreement


CLEANER, VACUUM, KS-14410 L2 (CONT)

The L11 hose may also be used with Filter Queen model 500 or 200 vacuum cleaner. If it is desired to use KS-14410 L12, L13, L14, L16, or L20 attachments with model 200 cleaner, hose furnished with that cleaner must be replaced by L11 hose.

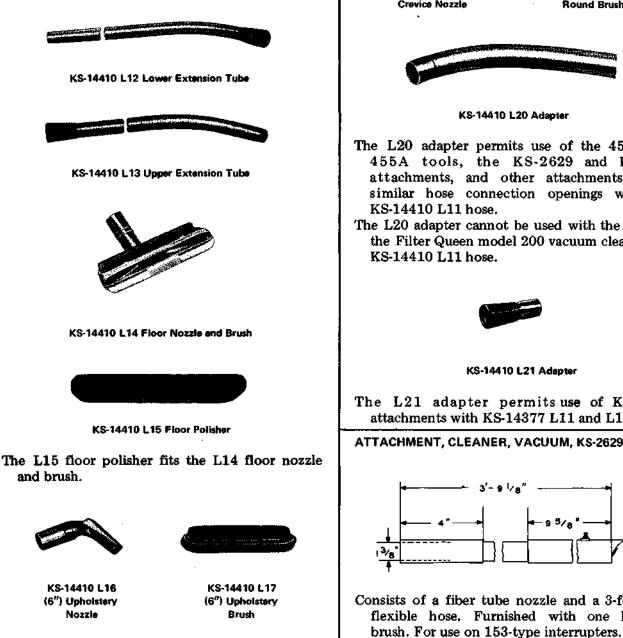


The L17 brush fits the L16 nozzle.

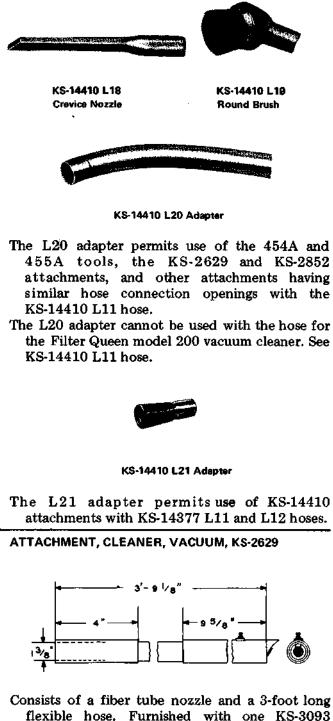

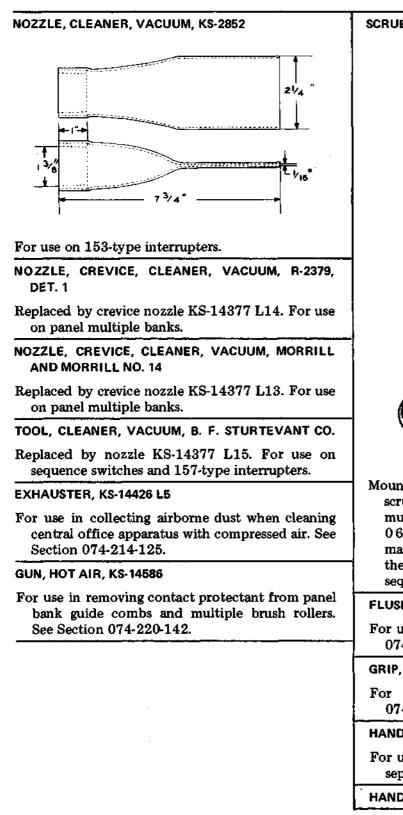

SCRUBBER, CAM, KS-14654 L1

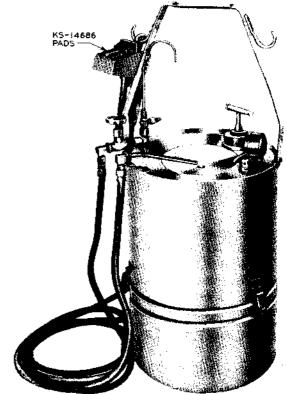

Mounts three KS-14686 pads which are arranged to scrub six cam sides simultaneously. The pads must be ordered separately. Refer to Section 069-601-801 for piece-part data and maintenance information for this tool. Replaces the 435A tool. For use in cleaning cams of sequence switches and 157-type interrupters.

FLUSHING UNITS, KS-16297 L50 AND KS-16916 L1

For use in cleaning step-by-step banks. See Section 074-217-124.

GRIP, HAND 469A

For use in cleaning rotor hubs. See Section 074-220-132.

HANDLE, KS-16298

For use in cleaning step-by-step bank contacts and separators. See Section 074-223-108.

HANDLE, KS-16884 L1

MFR DISC

