
TOOLS


NEEDLES - DESCRIPTION

1. GENERAL


- 1.01 This section covers coded and noncoded Bell System needles.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-107-101 and 074-680-101.




Straight cable sewing needle. For use in sewing local cable (PBX installation only).

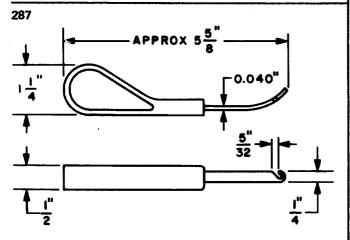

Curved cable sewing needle. For use in sewing local cable (PBX installation only).

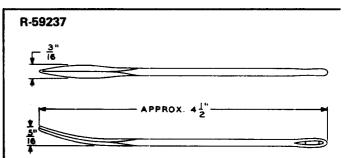

Sack needle. Steel needle for use in sewing cable forms (PBX installation only).



A curved, insulated, metal rod equipped with an insulated eye at one end arranged to thread four 22-gauge insulated wires. The other end is provided with an insulated handle. The KS-20096 L10 needle eye may be ordered as a separate item to replace damaged eyes on KS-20096 L1 needles in the field. For use in running jumpers on the No. 1 ESS main distributing frame.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement