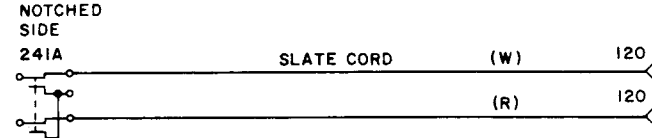





TESTING CORD ASSEMBLIES
2-CONDUCTOR CORDS
2W1A TO 2W28A
DESCRIPTION

| | |
|---|--|
| <p>2W1A "Mfr Disc."</p> | <p>2W5A 1 S2B slate cord, 6 feet long, equipped with: 1 310 plug</p> |
| <p>◆ 2W2A ◆ "Mfr Disc."</p> | |
| <p>2W3A 1 P2AA cord, 3 feet long, equipped with: 1 241A plug</p> <p>NOTCHED SIDE 241A</p>  <p>The individual code of the cord includes two 120 cord tips which finish one end to fit a 241A plug.</p> | <p>2W5B 1 S2B red cord, 10 feet long, equipped with: 1 310 plug</p>  <p>The individual code of the cord includes two 131 cord tips.</p> |
| <p>2W4A 1 R2CF cord, 6 feet long, equipped with: 1 310 plug Res. 0.16 Ω/ft</p>  <p>The individual code of the cord includes two 130 cord tips.</p> | <p>2W6A 1 W2C cord, 10 feet long, equipped with: 1 310 plug</p>  <p>The individual code of the cord includes two 59 cord tips.</p> |

◆2W7A◆


1 W2F cord, 9 feet 6 inches long, equipped with:
1 347C plug

◆2W7B◆

1 W2F cord, 12 feet long, equipped with:
1 347C plug

◆2W8A◆

1 W2F cord, 9 feet 6 inches long, equipped with:
1 347D plug

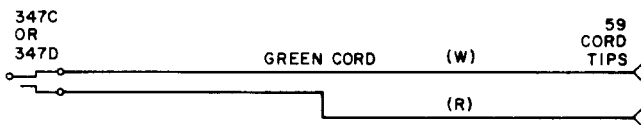

The individual code of the cord includes two 59 cord tips.

2W9A

1 W2J cord, 9 feet 6 inches long, equipped with:
1 310 plug




The individual code of the cord includes two 29 cord tips.

2W10A

“Mfr Disc.”
(replaced by the 2W27A cord)

2W11A

1 W2L cord, 5 feet long, equipped with:
1 309 plug




The individual code of the cord includes two 35 cord tips.

2W12A

1 W2M cord, 9 feet long, equipped with:
1 310 plug with red shell
Res. 0.02 Ω/ft

2W12B


1 W2M cord, 9 feet long, equipped with:
1 310 plug and black shell
Res. 0.02 Ω/ft

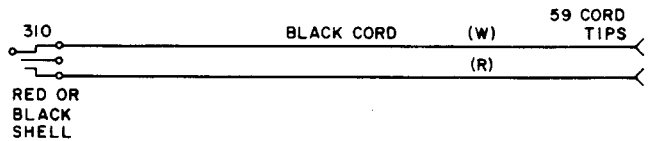

The individual code of the cord includes two 59 cord tips.

2W13A

1 W2R cord, 6 feet long, equipped with:
1 310 plug
Res. 0.02 Ω/ft




The individual code of the cord includes two 37 cord tips.

2W14A

A&M Only

1 W2S cord, 2 feet 6 inches long, equipped with:

1 241A plug

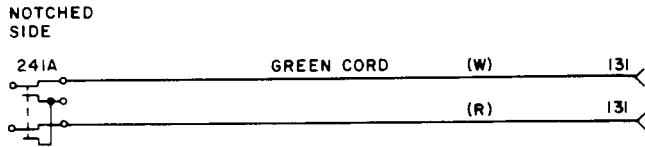

The individual code of the cord includes two 131 cord tips.

2W15A


1 W2BP cord, 2 feet 6 inches long, equipped with:

1 241A plug

2W15B

1 W2BP cord, 6 feet long, equipped with:

1 241A plug

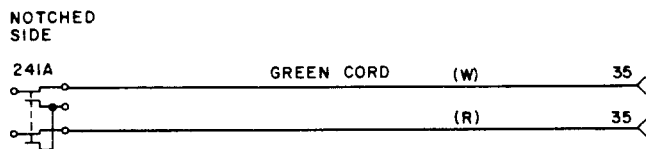


The individual code of the cord includes two 35 cord tips.

2W16A

1 W2T cord, 9 feet long, equipped with:

1 310 plug



The individual code of the cord includes two 59 cord tips.

2W17A

1 W2W cord, 6 feet long, equipped with:

- 1 310 plug
- 1 360B tool
- 1 360C tool

2W17B

1 W2W cord, 30 feet long, equipped with:

- 1 310 plug
- 1 360B tool
- 1 360C tool

2W17C


1 W2W cord, 10 feet long, equipped with:

- 1 310 plug
- 1 360B tool
- 1 360C tool

2W17D

1 W2CF cord, 1 foot long, equipped with:

- 1 310 plug
- 1 360B tool
- 1 360C tool

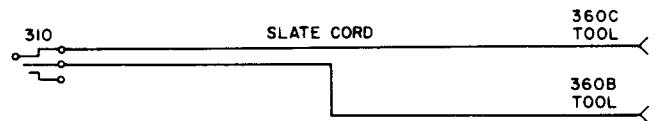

2W18A

"Mfr Disc."
(replaced by the 2W20A cord)

◆**2W19A**◆

1 W2AA cord, 5 feet long, equipped with:

1 347D plug

Res. 0.02 Ω/ft


◆**2W20A**◆

(replaces the 2W18A cord)

1 W2AA cord, 5 feet long, equipped with:

1 347C plug


Res. 0.02 Ω/ft



The individual code of the cord includes two 35 cord tips.

2W21A


1 W2AB cord, 6 feet long, equipped with:
 2 360A tools
 Res. 0.16 Ω /ft

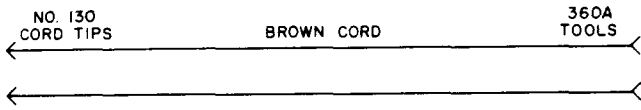

The individual code of the cord includes two 130 cord tips.


2W22A

1 W2AS cord, 8 feet long, equipped with:
 1 310 plug
 1 522A key
 Res. 0.16 Ω /ft

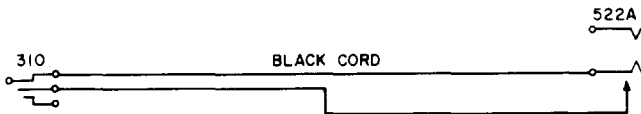

◆2W24A◆


1 W2GG cord, 9 feet 6 inches long, equipped with:
 1 464C plug

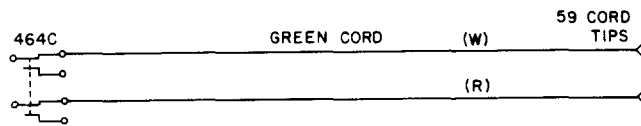

The individual code of the cord includes two 59 cord tips.

2W25A

1 W2BB cord, 5 feet long, equipped with:
 1 309 plug
 Res. 0.04 Ω /ft



The individual code of the cord includes two 35 cord tips.

2W26A

(recommended for 2W27A cord)

1 W2BC cord, 5 feet 6 inches long, equipped with:
 1 304A plug
 Res. 0.04 Ω /ft



The individual code of the cord includes two 35 cord tips.

2W27A

"Mfr Disc."

(2W26A or 2W42A cord recommended)

◆2W28A◆

1 630 cord, 5 feet 6 inches long, equipped with:
 1 347C plug
 Res. 0.16 Ω /ft



The individual code of the cord includes two 30 cord tips.