NONCODED TOOLS

SHEARS, SHIELDS, SLEEVES, SLOTTERS, SOCKETS,

SPOTLIGHTS, SPOUTS, SPUDGERS, STANDS, AND STICKS


DESCRIPTION

SHEARS, WIRE ROPE, R-3370




For use in cutting nylon-covered wire rope on rolling ladder brakes.

SHIELD, KS-14378

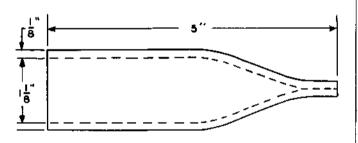

Electron tube shield For use on 430A vacuum tubes in AMA Systems.

SHIELD, D-91244




For use in Pneumatic Ticket Distributing Systems.

SLEEVE, WIRE WRAPPING, KS-16363 L30, L31, L32, and L33 "Mfr. Disc."

KS-16363 L30, L31, and L33 replaced by KS-20963 L2 wire wrapping sleeve. KS-16363 L32 replaced by KS-20963 L3 wire wrapping sleeve.

→SLEEVE, WIRE WRAPPING, KS-20963 L2, L3 (In ordering, specify the L number desired.)




L2 sleeve (coded red) is intended for use with a 22-24 gauge combination bit.

L3 sleeve (coded yellow) is intended for use with a 26-gauge bit.

Refer to Section →074-850-101← for the KS-16363, List 1 wire wrapping tool and Section 074-520-101 for KS-16734 List 1 and KS-16903 List 1 wrapping bits.


For use in making solderless wrapped connections.

SLOTTER AND SCRAPER, IDEAL INDUSTRIES, INC., NO. 20-006



For use on generator and motor commutators and on interrupter drums.

SOCKET, LAMP, NO. 38B

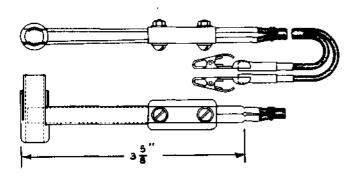


Consists of a 38A lamp socket equipped with an M2CP cord (6' 6"). Intended for use with a 2-type switchboard lamp. The 2-type lamp must be ordered separately.

For general use.

SPOTLIGHTS


Refer to flashlights.

SPOUT, KS-16918 L1



For use in pouring contact protectant compound into the applicator tools used for treating tip- and ring-panel bank terminals.

SPUDGER, FIBRE, R-1102



For general use.


STAND, TEST, AECo H-15799

Replaced by ED-30712-01 test stand, Groups G1 and G3.

STAND, TEST, UNIVERSAL, AECo H-60293

Replaced by ED-30712-01 test stand, Groups G2 and G4.

STAND, TEST, ED-30712-01, GROUP 1 STAND, TEST, ED-30712-01, GROUP 2 STAND, TEST, ED-30712-01, GROUP 3 STAND, TEST, ED-30712-01, GROUP 4



Dimension "A" — Groups G1 and G3, 1' 9 1/2" Groups G2 and G4, 2' 10 3/8"

Groups G1 and G3 replace the AECo H-15799 test stand.


Groups G2 and G4 replace the AECo H-60293 universal test stand.

Test stands per Groups G1 and G3 are for use on short base 197- and 198-type switches. Test stands per Groups G2 and G4 are for use on short and long base 197- and 198-type switches. Groups G1 and G2 are equipped with protector, connecting block, jack mounting, and jack. Groups G3 and G4 are unequipped.

STICK, CARBORUNDUM, MEDIUM 3/8" ROUND, 4" LONG, THE CARBORUNDUM CO.


Replaced by the TP87698 carborundum stone.

STICK, LISTENING, NO. 1A



For use on 218B relays.

STICK, ORANGE, KS-6320

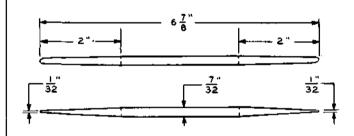

For general use.