

PATCHING CORD ASSEMBLIES


3-CONDUCTOR

P3A THROUGH P3W

DESCRIPTION

P3A

3 feet long

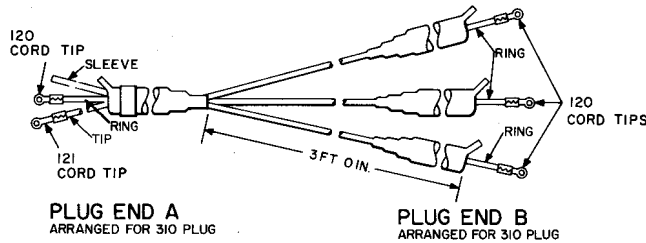


Res 0.21 Ω /ft

The code of the cord includes four 120 cord tips and one 121 cord tip. The cord was initially intended for use in emergency plugging-up to make a line busy.

P3D

9 inches, 3, 6, or 8 feet long in slate color or 8 feet in red-green (Unless otherwise specified, the 6-foot slate cord will be furnished.)

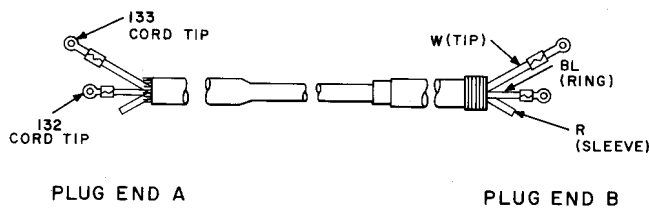


Res 0.18 Ω /ft

The code of the cord includes two 132 cord tips and two 133 cord tips. Both ends are arranged for a 309 plug.

P3E

1 foot, 2, 3, 4, 6, 8, 10, 12, 15, 20, and 25 feet long in slate or 8 feet in green (Unless otherwise specified, the 6-foot slate cord will be furnished.)

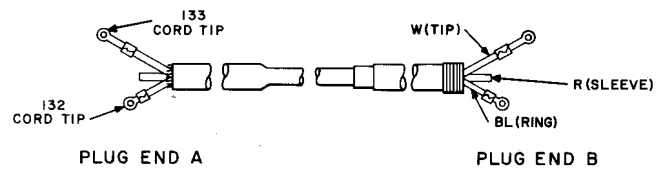


Res 0.18 Ω /ft

The code of the cord includes two 132 cord tips and two 133 cord tips. Both ends are arranged for 291B, 310, 257A and B, and 248A plugs.

P3F

2, 4, 6, and 8 feet long in slate, red, black, or green. The 8-foot, red-green cord is also available. (Unless otherwise specified, the 8-foot slate cord will be furnished.)

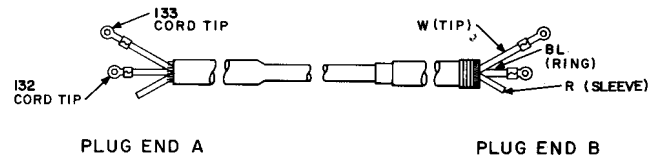


Res 0.18 Ω /ft

The code of the cord includes two 132 cord tips and two 133 cord tips. Arranged for a 309 plug at plug end A and a 310 plug at plug end B.

P3H

10 feet long (When specified in the order, 5, 6, 7, 8 feet, 8 feet 6 inches, and 9 feet 6 inches long can also be obtained.)

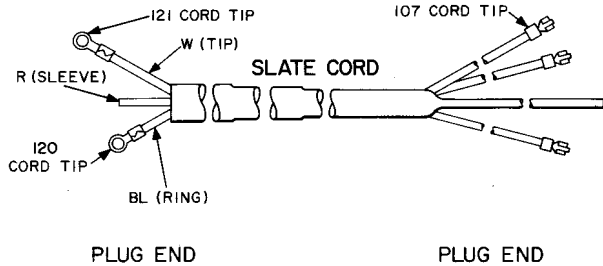


Res 0.21 Ω /ft

The code of the cord includes one 120 cord tip, one 121 cord tip, and three 107 cord tips. Arranged for a 310 and D-5773 plugs or a 310- and 240-type plugs. When ordered equipped with the A. E. Company D-5773 plug, the white conductor will be connected to the inside spring and the blue conductor to the outside spring on the side of the plug on which the heads of the clamping screws appear.

P3J

3 feet long (When specified in the order, 1-, 2-, 4-, and 6-foot cords can also be obtained.)

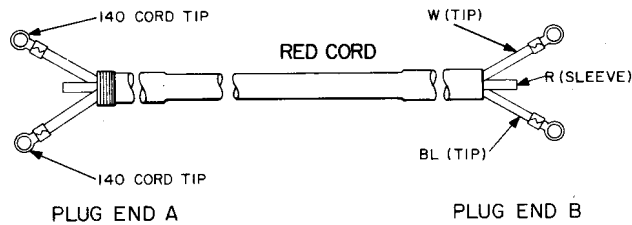


Res 0.18 Ω /ft

The code of the cord includes four 140 cord tips. Both ends are arranged for the 241-type plugs.

P3K

12 feet long (When specified, 6-foot cords will be furnished.)

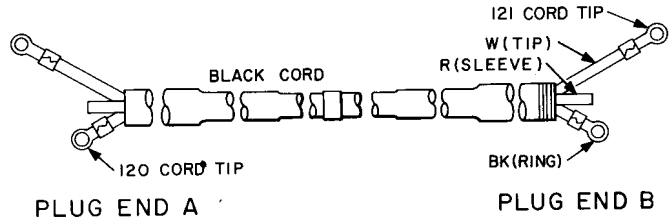


Res 0.01 Ω /ft

The code of the cord includes two 120 cord tips and two 121 cord tips. Both ends are arranged for the 310 plugs.

P3L

12 feet long (When specified, 6-foot cords will be furnished.)

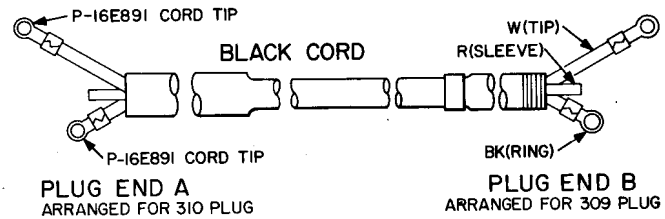


Res 0.017 Ω /ft

The code of the cord includes four P-16E891 cord tips.

P3N

3 feet long (When specified, 6-, 15-, and 20-foot lengths can also be obtained.)

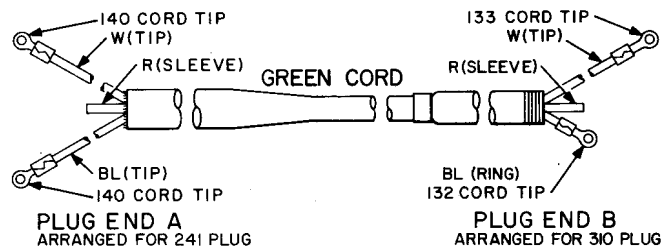


Res 0.18 Ω /ft

P3N (CONT)

The code of the cord includes one 132 cord tip, one 133 cord tip, and two 140 cord tips. The cord was initially intended for use on the No. 4, 5, and 16 tool testboards and No. 9 telegraph testboard.

P3P

6 feet long (When specified, 2-, 4-, 8-, 10-, and 12-foot cords can also be obtained.)

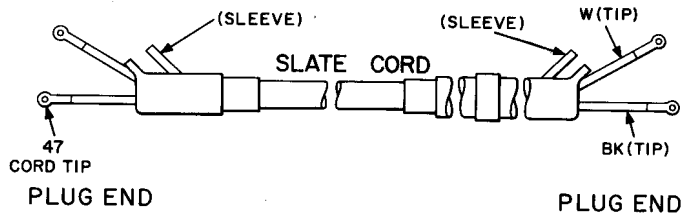


Res 0.006 Ω /ft

The code of the cord includes four 47 cord tips. The cord was initially intended for use as a patching cord in the K carrier telephone circuits. Both ends are arranged for the 305 plugs.

P3R

19 feet 6 inches long

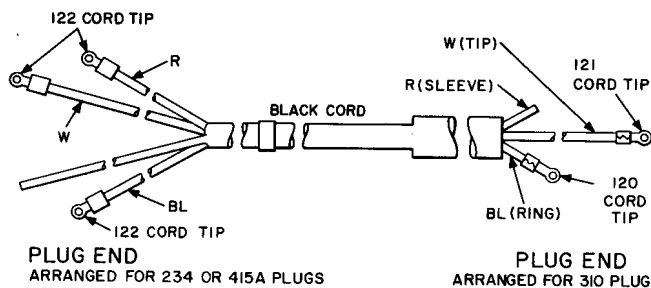


Res 0.21 Ω /ft

The code of the cord includes one 120 cord tip, one 121 cord tip, and three 122 cord tips. The cord was initially intended for use on manual switchboards in answering time recorder circuit.

P3S

19 feet 6 inches long

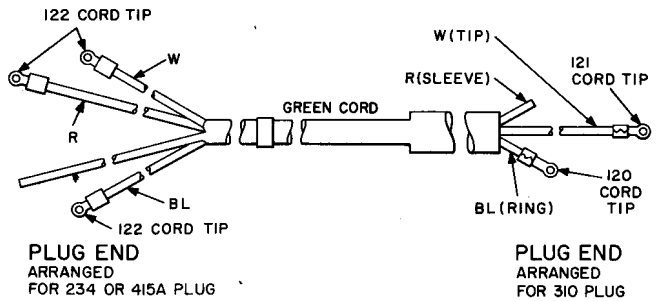


Res 0.21 Ω /ft

The code of the cord includes one 120 cord tip, one 121 cord tip, and three 122 cord tips. The cord was initially intended for use on manual switchboards in answering time recorder circuit.

P3U

7 feet long (When specified, the 19-foot 6-inch length can also be obtained.)

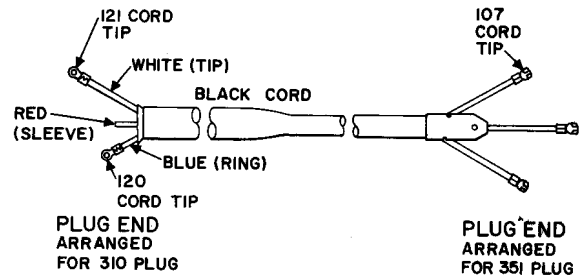


Res 0.21 Ω /ft

The code of the cord includes one 120 cord tip, one 121 cord tip, and three 107 cord tips.

SECTION 032-313-108

P3W

6 feet long

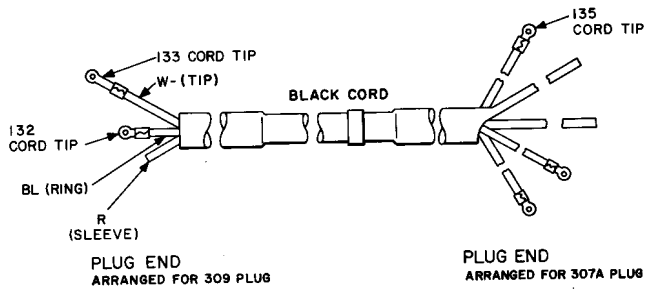

Res 0.18 Ω /ft

The code of the cord includes one 132 cord tip, one 133 cord tip, and three 135 cord tips. The cord was initially intended for use with the J64001R tube test set.