

## TOGGLE BRIDLE RINGS

### 1. GENERAL

1.01 Toggle bridle rings are of two general types: flop over and spring. They are used as intermediate attachments to support wires on hollow walls.

1.02 Both types are available in two sizes, 5/8 inch and 1-1/4 inches.

1.03 A secure toggle bridle ring installation depends on a satisfactory bearing area for the toggle. The predrilled hole required for installation of both sizes of toggle bridle rings should be restricted to 3/4 inch for best results.

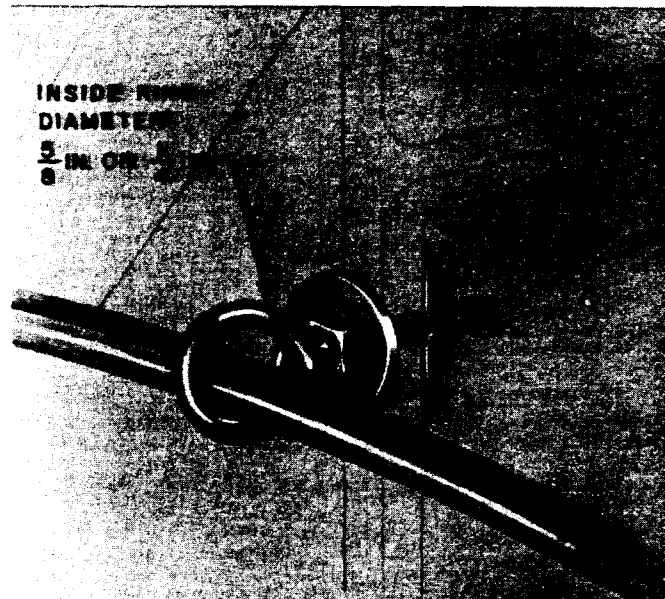


Fig. 1 - Toggle Bridle Ring