



Equivalent T-Networks for Equipment

TERMINAL COMPOSITE SETS





OPEN-WIRE



CABLE

FREQ.	SIDE		PHANTOM*		SIDE		PHANTOM*	
	a	c	a	c	a	c	a	c
200	-j390	+j3700	-j195	+j1850	-j736	+j7170	-j368	+j3590
300	-j252	+j5600	-j126	+j2800	-j491	+j11,000	-j245	+j5500
1000	-j74	+j18,800	-j37	+j9400	-j147	+j37,600	-j74	+j18,800
1600	-j46	+j30,200	-j23	+j15,100	-j92	+j60,200	-j46	+j30,100
2000	-j37	+j37,700	-j19	+j18,800	-j74	+j75,400	-j37	+j37,700
2200	-j33	+j41,500	-j17	+j20,700	-j67	+j82,900	-j33	+j41,500
2400	-j32	+j45,200	-j16	+j22,600	-j61	+j90,400	-j31	+j45,200
2900	-j26	+j54,600	-j13	+j27,300	-j51	+j109,300	-j25	+j54,600

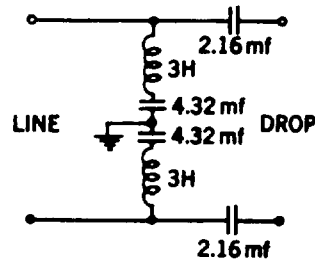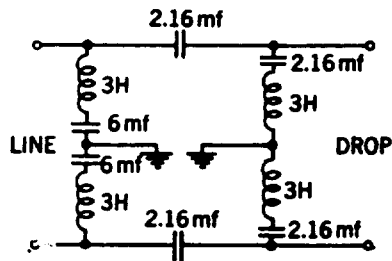

* Effect of side circuit composite sets on phantom circuits