

**SERVICE**  
**500W/Y AND 500YM TELEPHONE SETS**  
**CONNECTIONS**

**1. GENERAL**

phasize the more significant changes.

**1.01** This section contains information on 500W/Y (MD) and 500YM telephone sets.

- Show 500W/Y (MD), Fig. 1


**1.02** The reasons for reissuing this section are listed below. Revision arrows are used to em-

- Change information on the 500YM (modular) telephone set, Fig. 2.

**NOTICE**

Not for use or disclosure outside the  
Bell System except under written agreement

SECTION 502-580-411

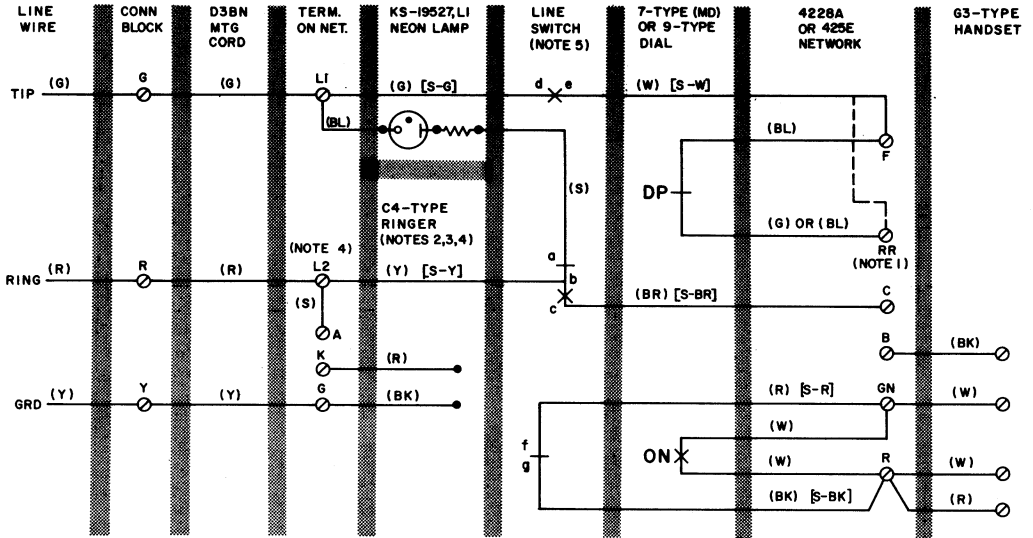

NOTES:

1. FOR MANUAL SERVICE REPLACE DIAL WITH APPARATUS BLANK, MOVE (W) [S-W] FROM "F" TO "RR" TERMINAL.
  2. TO SILENCE RINGER PERMANENTLY FOR ALL CLASSES OF SERVICE REFER TO SECTION 501-250-303.
  3. SET WIRED FOR RING PARTY SERVICE. FOR TIP PARTY SERVICE REVERSE (R) AND (G) MOUNTING CORD LEADS AT CONNECTING BLOCK. FOR INDIVIDUAL OR BRIDGED PARTY SERVICE CONNECT (Y) MOUNTING CORD LEAD TO G TERMINAL AT CONNECTING BLOCK.
  4. CONNECTIONS FOR C4B RINGER SHOWN. IF C4A RINGER IS USED, WIRE AS FOLLOWS:
    - (BK) TO G
    - (S) TO K
    - (S-R) TO A
    - (R) TO L2
- REMOVE (S) STRAP FROM A TO L2 OF NETWORK.


5. LINE SWITCH SEQUENCE, HANDSET REMOVED.

- (1) bc MAKES
- (2) de MAKES
- (3) ab BREAKS
- (4) gf BREAKS

( ) CURRENT COLOR CODE  
 [ ] MD COLOR CODE

DP DIAL PULSE CONTACT  
 ON DIAL OFF-NORMAL CONTACT

Fig. 1—500W/Y (MD) Telephone Set, Connections

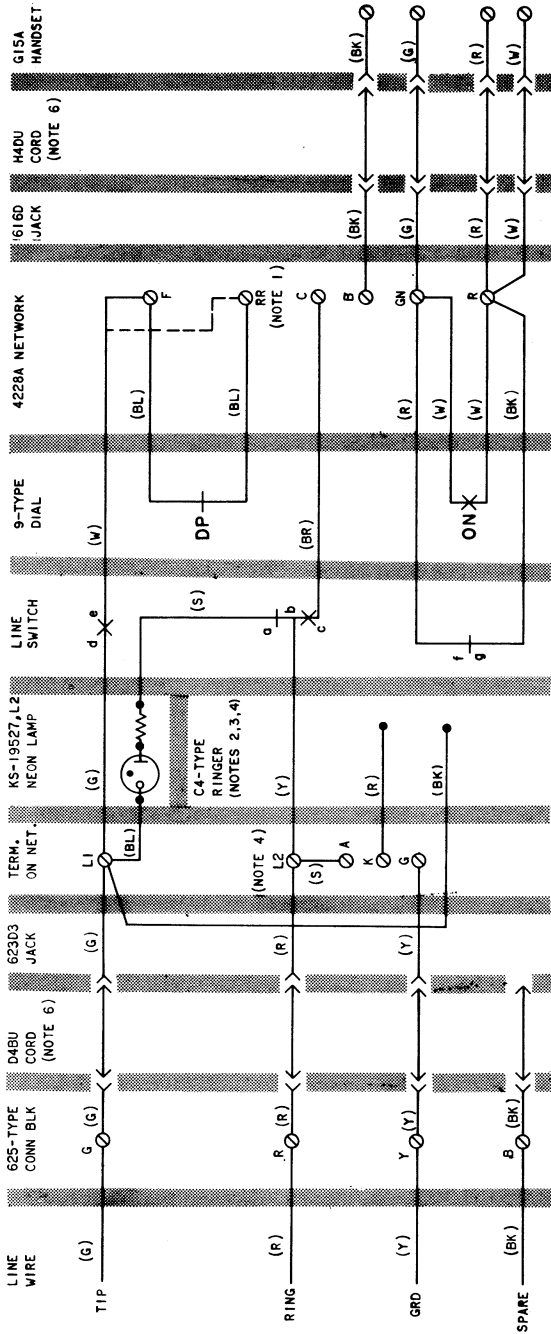

NOTES:

1. FOR MANUAL SERVICE REPLACE DIAL WITH APPARATUS BLANK. MOVE (W) FROM 'F' TO 'RR' TERMINAL.
2. TO SILENCE RINGER PERMANENTLY FOR ALL CLASSES OF SERVICE REFER TO SECTION 501-250-303.
3. SET WIRING FOR INDIVIDUAL OR BRIDGED RINGING. FOR OTHER CLASSES OF SERVICE REFER TO SECTION 502-501-115.
4. CONNECTIONS FOR C4B RINGER SHOWN. IF C4A RINGER IS USED, WIRE AS FOLLOWS:  
 (BK) TO L1  
 (S) TO K  
 (S-R) TO A  
 (R) TO L2  
 REMOVE (S) STRAP FROM A TO L2 OF NETWORK.

5. LINE SWITCH SEQUENCE, HANDSET REMOVED.

- (1) DC MAKES
  - (2) de MAKES
  - (3) ab BREAKS
  - (4) gf BREAKS
6. H4DU HANDSET CORD AND D4BU MOUNTING CORD MUST BE ORDERED SEPARATELY.

DP DIAL PULSE CONTACT  
 ON DIAL OFF-NORMAL CONTACT

Fig. 2 — 500YM Telephone Set, Connections