

**10A UNIT, DATA INTERFACE
DESCRIPTION AND INSTALLATION**

"OMNIPOINT" * NETWORK CHANNEL TERMINATING EQUIPMENT

1. GENERAL

1.001 This addendum supplements AT&T Practice 332-620-134, Issue 1. Place this pink sheet ahead of Page 1 of the practice.

1.002 This addendum is issued to replace Table B and Fig. 4 with updated equalizer performance information.

2. CHANGES TO SECTION

2.001 On Page 12, replace Table B with new Table B.

2.002 On Page 13, replace Fig. 4 with new Fig. 4.

* Trademark of AT&T Technologies.

TABLE B								
10A UNIT EQUALIZER PERFORMANCE								
EQ SWITCH SETTING	FREQUENCY (Hz)							
	200	400	600	1000	1600	2000	2400	2800
0	-2.5	-0.8	-0.3	0.0	0.2	0.2	0.2	0.1
1	-2.8	-1.1	-0.6	-0.1	0.4	0.7	1.0	1.1
2	-3.2	-1.5	-0.9	-0.2	0.6	1.2	1.8	2.1
3	-3.6	-1.9	-1.2	-0.3	1.0	1.9	2.7	3.1
4	-4.1	-2.3	-1.5	-0.4	1.4	2.5	3.4	3.9
5	-4.8	-2.9	-2.0	-0.3	2.0	3.4	4.4	5.0
6	-5.7	-3.6	-2.4	-0.3	2.7	4.3	5.5	6.2
7	-7.0	-4.5	-2.8	0.1	3.7	5.5	6.8	7.5
8	-6.9	-5.4	-3.7	-0.2	3.9	5.7	7.1	8.2
9	-7.2	-5.7	-3.9	-0.3	4.1	6.2	7.9	9.2
10	-7.6	-6.1	-4.2	-0.4	4.3	6.8	8.7	10.1
11	-8.1	-6.5	-4.6	-1.4	4.7	7.5	9.6	11.2
12	-8.5	-6.9	-4.9	-0.6	5.0	8.0	10.3	11.9
13	-9.1	-7.5	-5.3	-0.7	5.6	8.9	11.4	13.1
14	-10.2	-8.2	-5.7	-0.4	6.4	9.8	12.4	14.2
15	-11.6	-9.1	-6.2	-0.9	7.4	11.0	13.7	15.5

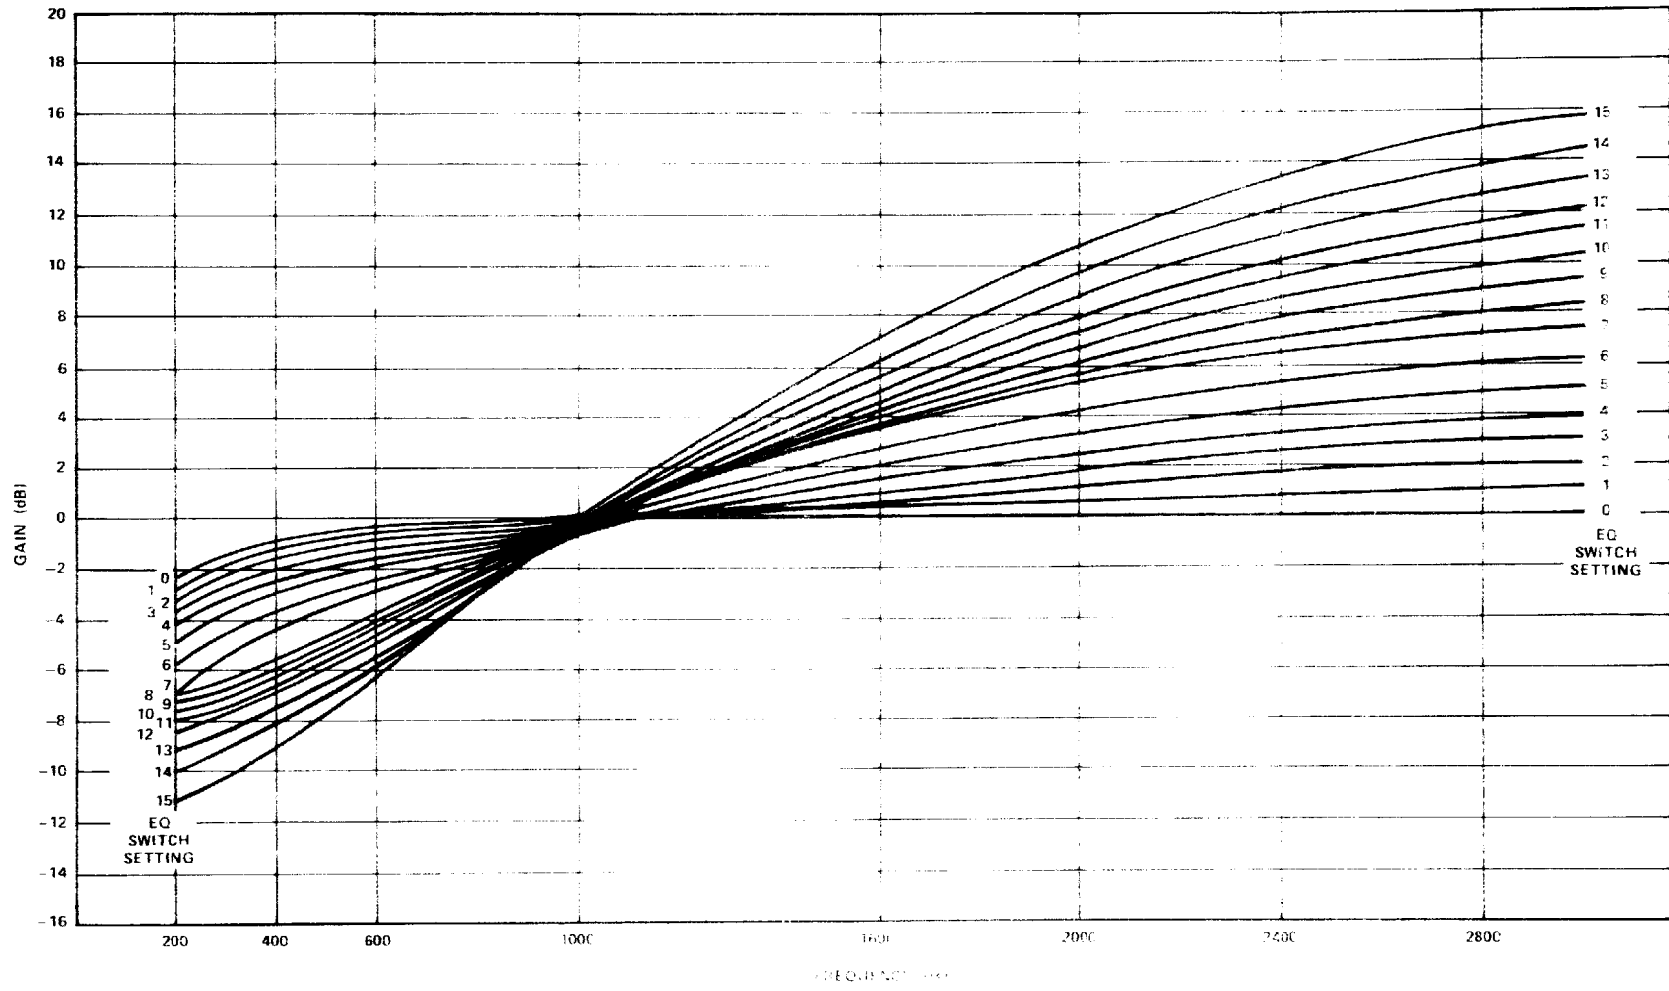


Fig. 4—Equalizer Performance Curves