## BACKBOARDS

# **IDENTIFICATION AND INSTALLATION**

#### 1. GENERAL

1.01 This section provides information on common use backboards and related devices. Refer to Division 506 for information on backboards for coin collectors and coin telephone sets.

1.02 This section is reissued to:

- Add 198A backboard (Fig. 37)
- Rate the 191C-59, -61, and -64 backboards MD (Table A).

#### 2. IDENTIFICATION

2.01 The purpose of these backboards is to provide adequate mounting surfaces for the installation of telephone sets, connecting blocks, and various other apparatus.

2.02 When terminating and cross-connecting cables on customer premises, especially in large buildings, it is recommended that the backboards installed in these locations be standardized. These backboards are now available in several sizes and colors and should follow the color scheme plan outlined in Section 518-010-101.

### 2.03 Ordering Guide:

CODE NO.	FIG. NO.
Backboard, 79	1
Backboard, 81	2
Backboard, 147A	3
Backboard, 154A	4
Backboard, 155A (MD)	5
Backboard, 156A (MD)	6
Backboard, 163A	7
Backboard, 164A	8
Backboard, 165A	9

Backboard, 166A	10
Backboard, 168D*	11
Backboard, 168E*	12
Backboard, 168F*	13
Backboard, 169A (MD)	14
Backboard, 171A	15
Backboard, 172C* (MD)	16
Backboard, 173A	17
Backboard, 173B	18
Backboard, 176A	19
Backboard, 177A	20
Backboard, 180A	21
Backboard, 181A	22
Cover, Screen, D-180313	22
Backboard, 182B*	23,24
Backboard, 183A1, A2,	25
A4, or A5†	
Backboard, 183B1, B2,	26
B3, B4, or B5†	
Backboard, 184A1†	27
Backboard, 184B1 <sup>+</sup>	28
Backboard, 184B2 <sup>+</sup>	29
Backboard, 185A1†	30
Backboard, 186A <sup>†</sup>	31
Backboard, 187B1†	32
Backboard, 188A1 (MD)	33
Backboard, 188B1	34
Backboard, 191C*	35
Backboard, 197A	36
Backboard, 198A	37 🌢
Backboard, KS-5796, L1 or L7	38
Backboard, KS-5796, L2 or L8	39
Backboard, KS-5796, L3 or L9	40
Assembly, Backboard, ED-69368-50,	41
Group 1	2.2
Trough, Wiring, 840348288	42

\* Add desired color code selected from Table A.

† Refer to appropriate figures for size and color information.

#### NOTICE

Not for use or disclosure outside the Bell System except under written agreement

### 2.04 Color:

#### TABLE A

#### COLOR ORDERING GUIDE

			BACK	BOARD	
CODE	COLOR	168D, 168E, 168F	172C*	182B	191C
03	Black		•	· •	•
-49	Light Olive Gray	•			
-50	lvory	•	•	•	•
-51	Green		•	•	•
-53	Red		•	•	•
-56	Yellow		•	•	•
-58	White		•	•	•
-59	Rose Pink		•	•	*
-60	Light Beige		•	•	•
-61	Light Gray		•	•	*
-62	Aqua Blue			•	•
-64	Turquoise		•	•	*

\* MD

### 3. INSTALLATION

3.01 Use colored backboards on customer premises where installations are to be standardized according to the color plan. In other applications, employ backboards for mounting apparatus or equipment only when one or more of the following conditions exist:

- Mounting surface is uneven.
- Mounting surface is damp.
- A secure mounting could not be obtained otherwise.
- It is necessary to insulate special apparatus from current-conducting surfaces.

• It is necessary to avoid drilling too many holes.

3.02 Backboards used on customer premises where standardization is important should follow the color scheme plan in Section 518-010-101 where all central office cables terminate on the same color backboards, key equipment on same color, etc, regardless of terminating area terminal room, apparatus closet, etc.

**3.03** Locating: Location of a backboard is dependent upon apparatus to be mounted thereon; however, select a location which will not expose craft personnel or equipment to injury or damage.

### 3.04 Installing:

 (a) Refer to Table B for proper fastening device and quantity to be used for each backboard dependent upon:

- Type of surface
- Strength and rigidity of base material
- Weight to be supported.

(b) Refer to appropriate section on attachments and fasteners in 080 Division for method of installing fasteners.

**Note:** When fasteners extend into or through a surface, avoid damaging existing equipment and wiring.

(c) When a particular backboard is not listed in Table B, refer to backboard most similar for mounting information.

(d) If existing mounting holes in backboards do not align when securing mounting, drill additional holes with proper tools.

(e) If backboards are located on an uneven surface, shim to obtain a firm mounting. Use fasteners 1/2-inch longer than specified in Table B.

(f) Backboards located outdoors should be secured with rust-proof fasteners such as galvanized screws or bolts.

(g) If backboard must be mounted on a finely finished surface, such as glazed tile or marble which would be expensive to repair, consult supervisor and obtain instructions before proceeding.

(h) When backboard is mounted on plaster on wood lath, all screws must enter laths or studding (see Fig. 3).

 When mounting buzzer on wooden backboards, countersink backboard mounting screws to prevent screwheads from contacting buzzer base (see Fig. 8).

 (j) The B beam clip and the B insulator support can be installed on I beams and angle irons
1/8- to 1/2-inch thick to fasten backboards at indoor locations. The B beam clip will accept a 10-24 or a 1/4-20 size screw. The B insulator support will accept a 10-24 screw. (See Fig. 43, 44, and 45.)

(k) Holes designated by bosses (Fig. 24) on the rear of a 182B or 191C backboard must be drilled to permit mounting 500-type wall sets. Use an 11/64-inch drill bit when drilling the bosses.

 A small section of the thin wall at the top or bottom edge of the 182B or 191C backboard may be broken out to allow entry of inside wiring (Fig. 24).

(m) The telephone set is not fastened to a 182B or 191C backboard; instead, the backboard is held in place by the fasteners which support the telephone set.



To prevent damage to line switch assembly when installing set on a 182B or 191C backboard:


- Place fasteners through backboard into supporting surface.
- Run up threads until head of fastener is 1/16-inch from backboard.
- Place the telephone set on fasteners using keyhole slots.
- Support screwdriver and tighten fasteners (Fig. 46).

### 3.05 Removing:

(a) Carefully remove all wire, screws, bolts, and other fasteners used in mounting backboard.

(b) In case backboard tends to stick to wall after fasteners have been removed, press palm of one hand tightly against backboard and tap upper end of backboard with a hammer.

(c) Whenever it is necessary to leave a backboard in place, remove all fasteners which hold the apparatus to the backboard. This prevents the possibility of personnel injury, damage to furniture, etc.



- · WOOD, BLACK
- MOUNTS ONE 58-, 98-, OR IO6-TYPE STATION PROTECTOR, OR TWO IIIA STATION PROTECTORS
  - Fig. 1—79 Backboard



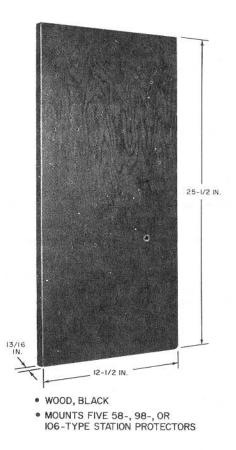


Fig. 2-81 Backboard

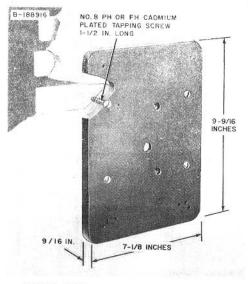

- · WOOD, GRAY
- MOUNTS A J86205H RECTIFIER, 634-, OR 653-TYPE SUBSCRIBER SET
- Fig. 3—147A Backboard Mounted on Plaster and Lath



- · METAL, BLACK
- MOUNTS 534-OR 634-TYPE SUBSCRIBER SET ON WOODEN BASEBOARD TO AVOID MOUNTING ON MASONARY OR TILE
- SCREWS PROVIDED

Fig. 5-155A (MD) Backboard






Fig. 4-154A Backboard

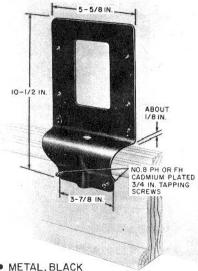


- METAL, BLACK
- MOUNTS 584-OR 684-TYPE SUBSCRIBER SET ON WOODEN BASEBOARD TO AVOID MOUNTING ON MASONRY OR TILE
- SCREWS PROVIDED

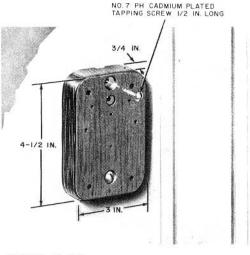

- · WOOD, BLACK
- . MOUNTS C- OR G-TYPE HAND TELEPHONE SET MOUNTINGS, OR 7-TYPE BUZZERS AND BELLS ON OTHER THAN WOOD SURFACES
- REPLACES 157A BACKBOARD


Fig. 8—164A Backboard Mounted on Metal Panel

Fig. 6—Mounting 156A (MD) Backboard on Wooden Baseboard




- · PHENOL FIBER, GRAY
- . MOUNTS 14A- OR 20A-TYPE INDICATOR
- SCREWS PROVIDED FOR MOUNTING INDICATOR AND BACKBOARD

Fig. 7-163A Backboard

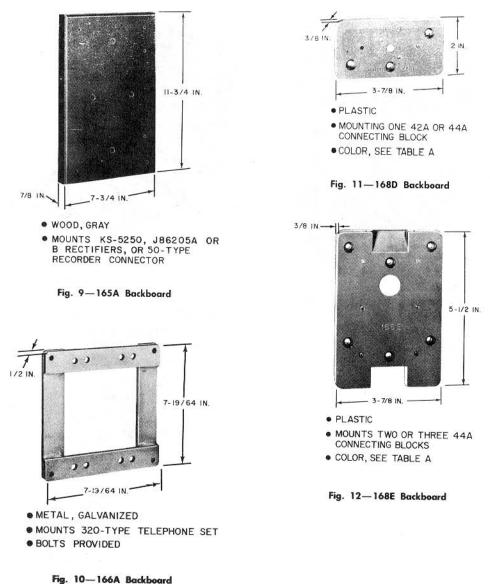




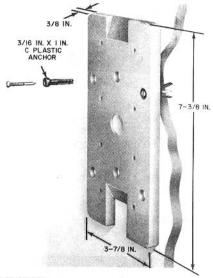

- · PLASTIC
- . MOUNTS FOUR 44A CONNECTING BLOCKS
- . COLOR, SEE TABLE A

Fig. 13-168F Backboard

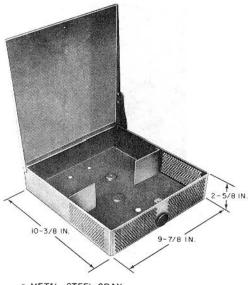

- METAL, STEEL GRAY
- . MOUNTS 592-TYPE SUBSCRIBER SET
- PROVIDES PROTECTION FROM WEATHER AND MECHANICAL INJURY
- HINGED COVER
- SCREWS PROVIDED
- . REPLACED BY 181A-49

Fig. 14-169A (MD) Backboard





Fig. 15-171A Backboard



- · PLASTIC
- MOUNTS 354-, 356-, 357-, 554-, 556-, OR 558-TYPE WALL TELEPHONE SET
- SCREWS PROVIDED
- · COLOR, SEE TABLE A

Fig. 16-172C (MD) Backboard



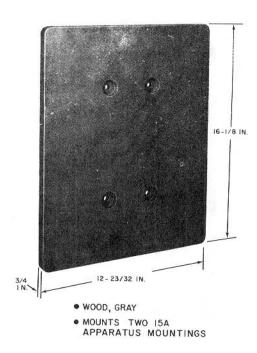


Fig. 17-173A Backboard

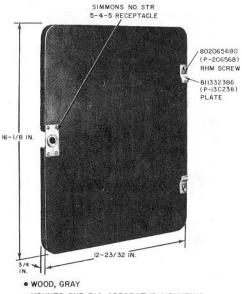


. MOUNTS ONE 31A APPARATUS MOUNTING

Fig. 18-173B Backboard




- · WOOD, GRAY
- MOUNTS SMALL MISCELLANEOUS APPARATUS SUCH AS JACKS, BUZZERS, INDICATORS, AND KEYS




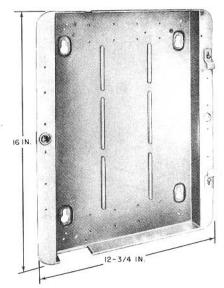

- METAL, (EARLY MODEL) FIBER GLASS (CURRENT MODEL) GRAY
- MOUNTS TWO 66BI-25 CONNECTING BLOCKS. AND ONE 31B APPARATUS MOUNTING USING A 811333095 (P-15C309) HINGED BRACKET ASSEMBLY AND A 814863056 (P-48F305) BRACKET ASSEMBLY. BRACKETS NOT FURNISHED.


Fig. 20-177A Backboard

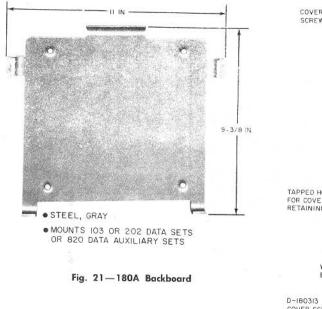

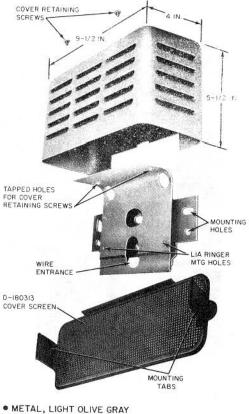

- . CONSISTS OF BACKBOARD AND COVER
- MOUNTS LIA RINGER IN OUTDOOR LOCATIONS
- OPTIONAL EQUIPMENT-COVER SCREEN FOR PROTECTION AGAINST BIRDS AND INSECTS, ORDER SEPARATELY

Fig. 22—181A Backboard, Exploded View

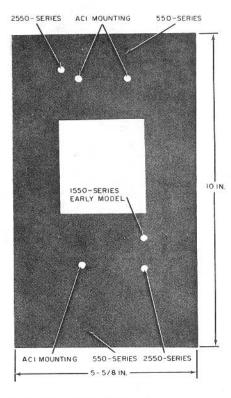

- PLASTIC 9/32 -IN. THICK
- MOUNTS 550-2550-SERIES WALL SET, OR ACI TELEPHONE BASE
- MAY BE USED TO MASK UNSIGHTLY WALL CONDITIONS EXITING WHEN LARGER WALL SETS ARE REPLACED BY SMALLER SETS
- . COLOR, SEE TABLE A

Fig. 23-182B Backboard



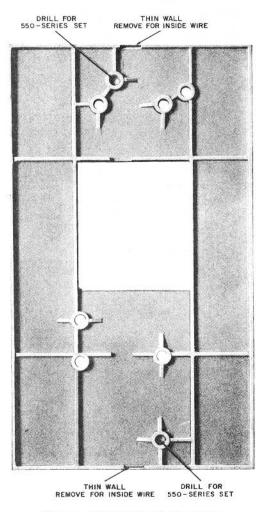


Fig. 24-182B Backboard, Rear View

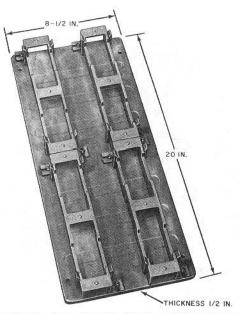


- BLUE 183AI, GREEN 183A2, PURPLE 183A4, YELLOW 183A5.
- CONSISTS OF METAL BOARD AND FOUR PLASTIC 89B BRACKETS SECURED BY TWO SCREWS EACH.
- MOUNTS FOUR 66-TYPE CONNECTING BLOCKS ORDERED SEPARATELY.
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES, REFER TO SECTION 518-010-101.

Fig. 25—183A1, A2, A4, or A5 Backboard

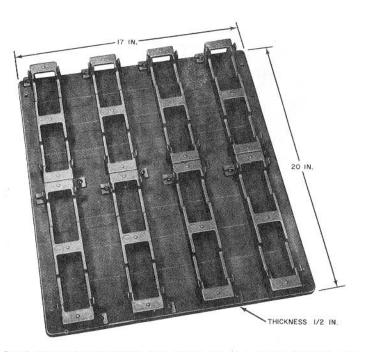


- BLUE 183BI, GREEN 183B2, RED 183B3, PURPLE 183B4, YELLOW 183B5.
- CONSISTS OF METAL BOARD AND EIGHT PLASTIC 89B BRACKETS SECURED BY TWO SCREWS EACH.
- MOUNTS EIGHT 66-TYPE CONNECTING BLOCKS, ORDERED SEPARATELY.
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES, REFER TO SECTION 518-010-101.

Fig. 26-183B1, B2, B3, B4, or B5 Backboard

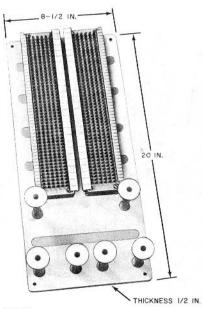


- RED 184A1.
- CONSISTS OF METAL BOARD, TWO 66B4-25 CONNECTING BLOCKS, AND SIX 834372377 (P-43X237) DISTRIBUTING RINGS.
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES, REFER TO SECTION 518-010-101.



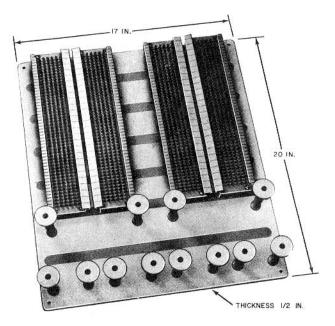


- RED 184BI.
- CONSISTS OF METAL BOARD, FOUR 66B4-25 CONNECTING BLOCKS, AND TWELVE 834372377 (P-43 X237) DISTRIBUTING RINGS.
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES, REFER TO SECTION 518-010-101.

Fig. 28-184B1 Backboard

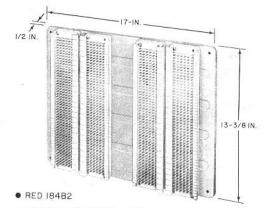


- CONSISTS OF METAL BOARD AND FOUR 66B4-25 CONNECTING BLOCKS.
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES, REFER TO SECTION 518-010-101.

Fig. 29-184B2 Backboard

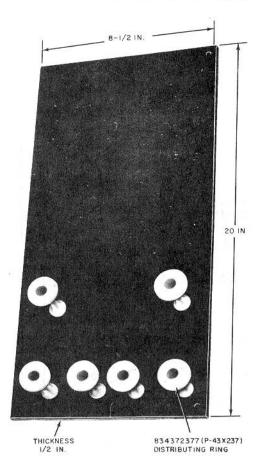

- . WOOD, YELLOW
- CONSISTS OF A BOARD AND SIX DISTRIBUTING RING ASSEMBLIES SECURED BY ONE SCREW EACH
- USEFUL IN MODULAR CONNECTING BLOCK ARRANGEMENT FOR TERMINATING AND CROSS CONNECTING ON CUSTOMER'S PREMISES REFER TO SECTION 518-010-101

Fig. 30-185A1 Backboard

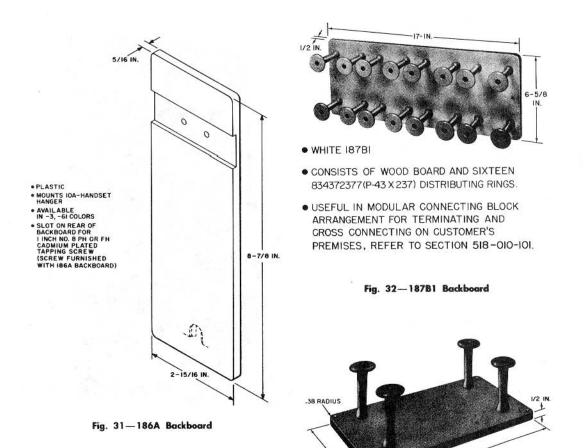

6-1/2 IN

10- 3/4 IN.


. WHITE STAMPED METAL PANEL WITH FOUR 834372377

 USED WITH 88-TYPE MODULAR CONNECTING BLOCKS TO RETAIN CROSS-CONNECT WIRES

Fig. 33-188A1 (MD) Backboard


(P-43 x 237) DISTRIBUTING RINGS

Page 18

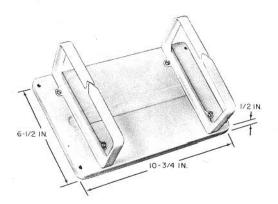

- WHITE STAMPED METAL PANEL WITH TWO 842139248 (COMCODE) DISTRIBUTION RINGS.
- USED WITH 88-TYPE MODULAR CONNECTING BLOCKS TO RETAIN CROSS-CONNECTING WIRES.







FRONT VIEW

- . PLASTIC 0.235 IN. THICK
- SNAPS OVER 630A4 CONNECTING BLOCK (PLUG-IN WALL SET MOUNTING) FOR DECOR PURPOSES
- MOUNTS 550-, EARLY 1550-, OR 2550-SERIES MODULAR WALL SET, OR AC1 BASE
- KNOCK-OUT MOUNTING HOLES AND CORRESPONDING SET CODES MOLDED IN BACK
- REPLACES 1828 AND 1918 BACKBOARD
- . COLOR, SEE TABLE A

Fig. 35-191C Backboard

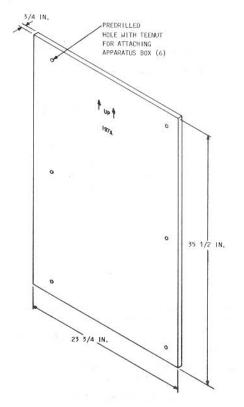

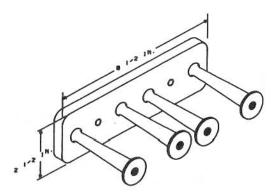


• STEEL PANEL, WHITE FINISH

• FOR CROSS-CONNECT WIRE WHERE MODULAR PANELS ARE STACKED VERTICALLY

Fig. 37-\$198A Backboard\$

- WOOD, LIGHT OLIVE GRAY
- INTENDED FOR WALL MOUNTING OF 121-TYPE APPARATUS BOX
- INCLUDES SIX SCREWS FOR ATTACHING APPARATUS BOX TO BACKBOARD
- WALL MOUNTING HOLES MUST BE DRILLED AND COUNTERSUNK BY INSTALLER
- . MOUNT ON WALL WITH AT LEAST SIX FLATHEAD SCREWS



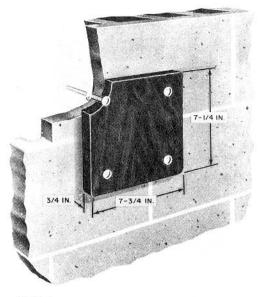


#### LIST I

- · WOOD, BLACK
- . MOUNTS ONE 105A APPARATUS BOX
- REPLACES 160A

### LIST 7


- . WOOD, BEIGE GRAY
- . MOUNTS ONE 105B APPARATUS BOX

### Fig. 38—KS-5796, List 1 or List 7 Backboard Mounted on Cinder Block

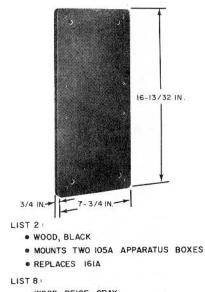

- WOOD, BEIGE GRAY
- . MOUNT TWO 1058 APPRATUS BOXES

#### Fig. 39—KS-5796, List 2 or List 8 Backboard

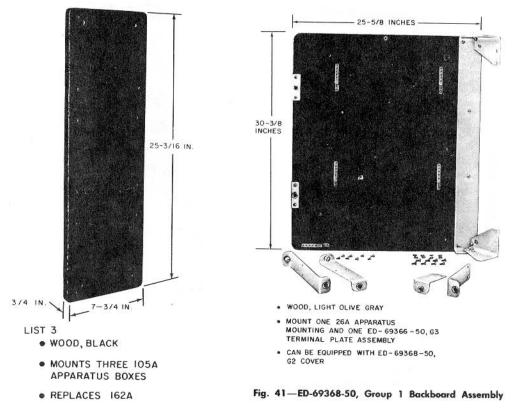

LIST 9

- . WOOD, BEIGE-GRAY
- MOUNTS THREE IO5B APPARATUS BOXES
- REPLACES A-2857

Fig. 40—KS-5796, List 3 or List 9 Backboard

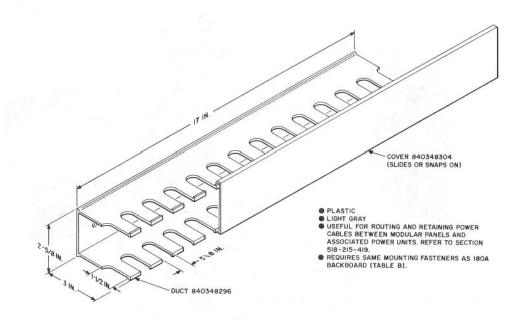


Fig. 42-Wiring Trough, 840348288

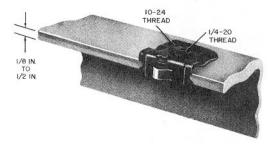


Fig. 43—B Beam Clip Mounted on Angle Iron



Fig. 44-B Insulator Support



Fig. 45—Typical Installation of Backboard Using B Beam Clip

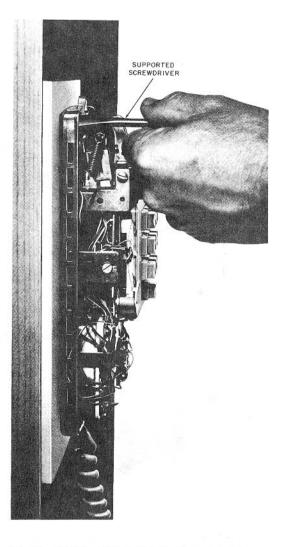


Fig. 46—Tightening Fasteners Which Support Telephone Set and 182B or 191C Backboard

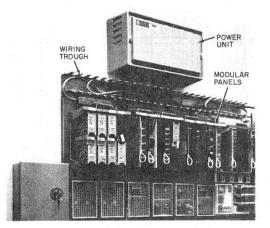


Fig. 47—Typical Installation of 840348288 Wiring Trough (Cover Removed)

## TABLE B

BACK- BOARD	ļ		MOUN	TING SUR	FACES			FASTENERS	
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD <sup>+</sup>	METAL (DESK OR PANELING)	HOLE SIZE REQD	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTI 1)
	•						3/32 or	1-1/2 Inch No. 8 FH Cadmium Plated Tapping Screw	
		•					No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	1
79,			•				3/16	1-1/2 Inch No. 8 FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
81							1/4	Wall Screw Anchor, 1/4 Inch	4
				•			3/32 or No. 33	1-1/2 Inch No. 8 FH Cadmium Plated Tapping Screw	]
							None	B Masonry Fastener, Size 8	1
					•		1/4	Wall Screw Anchor, 1/4 Inch	
							1/2	1/8- by 4-Inch BH Toggle Bolt	1
						•	No. 33	1-1/4 Inch No. 8 Self-Tapping Screw	
	•						3/32 or	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		•					No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
				i i			None	B Masonry Fastener, Size 5	4
			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
147							1/4	Wall Screw Anchor, 1/4 Inch	
154				•			3/32 or No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	
					•		1/4	Wall Screw Anchor, 1/4 Inch	3
							1/2	1/8- by 4-Inch BH Toggle Bolt	
						•	No. 33	1-Inch No. 8 RH Self-Tapping Screw	
155, 156	•	•					3/32 or	3/4-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	2
163	•						No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	4
		•						1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	

			MOUN	ITING SURF	ACES			FASTENERS	
	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD†	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
							None	B Masonry Fastener, Size 5	
			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	4
			•				1/4	Wall Screw Anchor, 1/4 Inch	
163				•			3/32 or No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	
					•		1/4	Wall Screw Anchor, 1/4 Inch	3
							1/2	1/8- by 4-Inch BH Toggle Bolt	
						•	No. 33	1-Inch No. 8 RH Self-Tapping Screw	
	•						3/32 or	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
Ì		•					No. 33	1-Inch No. 8 RH Blued Wood Screw	
							None	B Masonry Fastener, Size 6	
			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
164		1					1/4	Wall Screw Anchor, 1/4 Inch	4
				•			3/32 or No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		1					None	B Masonry Fastener, Size 8	
					•		1/4	Wall Screw Anchor, 1/4 Inch	
							1/2	1/8- by 4-Inch BH Toggle Bolt	1
						•	No. 33	5/8-Inch No. 8 RH Self-Tapping Screw	
	•						3/32 or	2-1/2 Inch No. 8 RH Galvanized Wood Screw	
		•					No. 33	2-1/2 Inch No. 8 RH Galvanized Wood Screw	
							None	B Masonry Fastener, Size 8	
165			•				3/16	2-1/2 Inch No. 8 RH Galvanized Wood Screw in No. 10 Plastic Anchor	4
							7/16	Wall Screw Anchor, 7/16 Inch	
				•			3/32 or No. 33	2-1/2 Inch No. 8 RH Galvanized Wood Screw	]

BACK- BOARD			MOUN		FACES			FASTENERS	
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD†	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
							None	B Masonry Fastener, Size 10	
					•		7/16	Wall Screw Anchor, 7/16 Inch	
165							5/8	3/16- by 4-Inch BH Toggle Bolt	4
						•	No. 33	1-1/4 Inch No. 8 RH Self- Tapping Screw	
	•	•					3/32 or No. 33	1-1/2 Inch No. 14 RH Galvanized Wood Screw 1-Inch No. 14 RH Galvanized Wood Screw	
166			•				5/16	1-1/4 Inch No. 14 RH Galvanized Wood Screw in No. 16 Plastic Anchor	
							7/16	Wall Screw Anchor, 7/16 Inch	1
				•			1/8 or No. 30	1-1/2 Inch No. 14 RH Galvanized Wood Screw	]
-							7/16	Wall Screw Anchor, 7/16 Inch	1
					•		3/4	1/4- by 4-Inch RH Toggle Bolt	1
						•	1/4	12-24 by 9/16-Inch RH Galva- nized Iron Machine Screw	
	•	•					3/32 or No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw 3/4-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 4	ł
			•				3/16	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
100							3/16	C Plastic Anchor, /16 by 1 Inch C Plastic Anchor, /16 by 1 Inch	
168		i i					1/4	Wall Screw Anchor, 1/4 Inch	4
							3/32 or No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
				None	B Masonry Fastener, Size 5				
							1/4	Wall Screw Anchor, 1/4 Inch	
							1/2	1/8- by 4-Inch BH Toggle Bolt	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	
						•	No. 33	5/8-Inch No. 8 RH Self-Tapping Screw	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	

BACK-			MOUN		ACES			FASTENERS	r
ТҮРЕ	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD <sup>†</sup>	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTI 1)
	•						1/8 or	1-1/2 Inch No. 14 RH Galvanized Wood Screw	
		•					No. 30	1-Inch No. 14 RH Galvanized Wood Screw	
							None	C Masonry Fastener, Size 42	4
			•				5/16	1-Inch No. 14 RH Galvanized Wood Screw in No. 16 Plastic Anchor	
169							1/4	Wall Screw Anchor, 1/4 Inch	
				•			1/8 or No. 30	1-1/2 Inch No. 14 RH Galvanized Wood Screw	
							None	C Masonry Fastener, Size 52	1
					•		3/8	Wall Screw Anchor, 3/8 Inch	3
							5/8	3/16- by 4-Inch BH Toggle Bolt	1
						•	1/4	12-24 by 9/16-Inch RH Galva- nized Iron Machine Screw	
	•						3/32 or	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		•					No. 33	3/4-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	]
							None	B Masonry Fastener, Size 4	1
			•				3/16	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
				-			3/16	C Plastic Anchor, 3/16 by 1 Inch C Plastic Anchor, 3/16 by 1 Inch	
171							1/4	Wall Screw Anchor, 1/4 Inch	4
							3/32 or No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 5	1
					-		1/4	Wall Screw Anchor 1/4 Inch	1
							1/2	1/8- by 4-Inch BH Toggle Bolt	1
							3/16	C Plastic Anchor, 3/16 by 1 Inch C Plastic Anchor, 3/16 by 1 Inch	
						•	No. 33	5/8-Inch No. 8 RH Self-Tapping Screw	
172	•						3/32 or	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
114		•					No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	4

BACK- BOARD			MOUN		ACES			FASTENERS	T
түре	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATK AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD†	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
							None	B Masonry Fastener, Size 5	
		×.	•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	4
							1/4	Wall Screw Anchor, 1/4 Inch	1
172				•			3/32 or No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	
					•		1/4	Wall Screw Anchor, 1/4 Inch	3
							1/2	1/8- by 4-Inch BH Toggle Bolt	
						•	No. 33	1-Inch No. 8 RH Self-Tapping Screw	
	•						1/8 or	2-1/2 Inch No. 14 FH Cadmium Plated Tapping Screw with 5/16- by 3/4-Inch Round Washer	
		٠					No. 30	1-1/4 Inch No. 14 FH Cadmium Plated Tapping Screw with 5/16- by 3/4-Inch Round Washer	
							None	B Masonry Fastener, Size 6	]
173			•				5/16	1-3/4-Inch No. 14 FH Cadmium Plated Tapping Screw with 5/16- by 3/4-Inch Round Washer in No. 16 Plastic Anchor	4
							7/16	Wall Screw Anchor, 7/16 Inch	1
				•			1/8 or No. 30	1-3/4 Inch No. 14 FH Cadmium Plated Tapping Screw with 5/16- by 3/4-Inch Round Washer	
							None	B Masonry Fastener, Size 8	
							7/16	Wall Screw Anchor, 7/16 Inch	
					•		3/4	1/4- by 4-Inch RH Toggle Bolt with 5/16- by 3/4-Inch Round Washer	
	•						3/32 or	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		•					No. 33	3/4-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
176							None	B Masonry Fastener, Size 4	4
			•				3/16	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	

BACK- BOARD			MOUN	TING SUR	ACES			FASTENERS	r
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD†	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
							3/16	C Plastic Anchor, 3/16 by 1 Inch	
							1/4	Wall Screw Anchor, 1/4 Inch	
							3/32 or No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
						1	None	B Masonry Fastener, Size 5	1
176							1/4	Wall Screw Anchor, 1/4 Inch	4
					•	ł	1/2	1/8- by 4-Inch BH Toggle Bolt	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	]
						•	No. 33	5/8-Inch No. 8 RH Self-Tapping Screw	ļ
							3/16	C Plastic Anchor, 3/16 by 1 Inch	1
	•						1/8 or	1-1/2 Inch No. 14 FH Cadmium Plated Tapping Screw	
		•					No. 30	1-Inch No. 14 FH Cadmium Plated Tapping Screw	
177			•				5/16	1-1/4 Inch No. 14 FH Cadmium Plated Tapping Screw in No. 16 Plastic Anchor	4
							None	C Masonry Fastener, Size 52	1
					•		3/4	1/4- x 3- or 4-Inch Toggle Bolt	1
	•						3/32 or	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		•					No. 33	3/4-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 5	
180A			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	4
							1/4	Wall Screw Anchor, 1/4 Inch	1
				•			3/32 or No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	1
							1/4	Wall Screw Anchor, 1/4 Inch	1
					•		1/2	1/8- by 4-Inch BH Toggle Bolt	]
						•	No. 33	3/4-Inch No. 8 RH Self-Tapping Screw	
181	•						1/8 or	1-1/2 Inch No. 14 RH Galvanized Wood Screw	
191		•					No. 30	1-Inch No. 14 RH Galvanized Wood Screw	4

## ♦ TABLE B (Contd) ♦

BACK- BOARD	1		MOUN		ACES	T		FASTENERS	1
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD <sup>+</sup>	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
							None	C Masonry Fastener, Size 42	
	2		•				5/16	1-Inch No. 14 RH Galvanized Wood Screw in No. 16 Plastic Anchor	4
							1/4	Wall Screw Anchor, 1/4 Inch	]
181				•			1/8 or No. 30	1-1/2 Inch No. 14 RH Galvanized Wood Screw	
							None	C Masonry Fastener, Size 52	
					•		3/8	Wall Screw Anchor, 3/8 Inch	3
							5/8	3/16- by 4-Inch BH Toggle Bolt	1
						•	1/4	12-24 by 9/16-Inch RH Galva- nized Iron Machine Screw	
	•						3/32 or	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
t.		•					No. 33	1-Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 5	1
			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
182, 191							1/4	Wall Screw Anchor, 1/4 Inch	2
151				•			3/32 or No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	
					•		1/4	Wall Screw Anchor, 1/4 Inch	
							1/2	1/8- by 4-Inch BH Toggle Bolt	
						•	No. 33	1-Inch No. 8 RH Self-Tapping Screw	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	
	•						3/32 or	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
183,		•					No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
184, 185.							None	B Masonry Fastener, Size 5	] .
187‡, 188 198‡			•				3/16	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	4
							1/4	Wall Screw Anchor, 1/4 Inch	]
				•			3/32 or No. 33	1-1/2 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	

## ♦ TABLE B (Contd) ♦

BACK-	Γ		MOUN		ACES			FASTENERS	
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD†	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
183							None	B Masonry Fastener, Size 6	
$184, \\185,$					•		1/4	Wall Screw Anchor, 1/4 Inch	
187‡,							1/2	1/8- by 4-Inch BH Toggle Bolt	4
188 198‡						•	No. 33	1-Inch No. 8 RH Self-Tapping Screw	
		•					3/32 or No. 33	1-Inch No. 8 FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 5	1
186			•				3/16	1-1/2 Inch No. 8 FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	2
				•			1/4	Wall Screw Anchor, 1/4 Inch 1-Inch No. 8 FH Cadmium Plated Tapping Screw	
						•	No. 33	1-Inch No. 8 FH Cadmium Plated Tapping Screw	
	•						3/32 or	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
		•					No. 33	1-Inch No. 8 RH PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 4	
			•				1/4	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw in No. 10 Plastic Anchor	
KS-	L						0/10	C Plastic Anchor, 3/16 by 1 Inch	
5796,							3/16	C Plastic Anchor, 3/16 by 1 Inch	
L1, 2, 3, 7,				•		×	1/4	Wall Screw Anchor, 1/4 Inch	4
8, 9							3/32 or No. 33	1-1/4 Inch No. 8 PH or FH Cadmium Plated Tapping Screw	
							None	B Masonry Fastener, Size 6	
							1/4	Wall Screw Anchor, 1/4 Inch	1
					-		1/2	1/8- by 4-Inch BH Toggle Bolt	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	
						•	No. 33	1-1/4 Inch No. 8 RH Self- Tapping Screw	
							3/16	C Plastic Anchor, 3/16 by 1 Inch	1

BACK- BOARD	MOUNTING SURFACES							FASTENERS	
TYPE	SOFT- WOOD	HARD- WOOD	MASONRY * (CONCRETE, BRICK)	LATH AND PLASTER†	PLASTER, CINDER BLOCK, HOLLOW TILE, METAL LATH, PLASTER- BOARD <sup>+</sup>	METAL (DESK OR PANELING)	HOLE SIZE REQUIRED	SIZE AND TYPE (NOTE 2 AND 3)	QTY (NOTE 1)
	•	*					1/8 or	2-1/2 Inch No. 14 FH Cadmium Plated Tapping Screw with $5/16$ x $3/4$ and $7/16$ x 1-Inch Flat Washers under screwhead	
ED- 69368-		•					No. 30	2-1/2-Inch No. 14 FH Cadmium Plated Tapping Screw with $5/16$ x $3/4$ and $7/16$ x 1-Inch Flat Washers under screwhead	6
50, G-1			•				5/16	2-1/2-Inch No. 14 FH Cadmium Plated Tapping Screw with 5/16 x 3/4 and 7/16 x 1-Inch Flat Washers under screwhead in No. 16 Plastic Anchor	6
					•		5/8	3/16 x 3 or 4-Inch BH Toggle Bolt with 5/16 x 3/4 and 7/16 x 1-Inch Flat Washers under bolt head	
197					Ref	fer to Sec	tion 518-450-	-111	

### FASTENERS USED IN MOUNTING BACKBOARDS

Notes:

1. Additional fasteners may be placed to ensure mounting.

2. When using toggle bolts, cut off excess length.

3. Size shown for wall screw anchors is diameter only. Length will be determined by wall thickness.

\* When mounting on plastered masonry, use fasteners 1/2-inch longer than specified.

t When mounting on plasterboard, plaster on lath, etc, fasteners must be embedded in stud at least 1 inch.

‡ Requires only 2 fasteners.