

<b>Remove the Following Pages</b>	<b>Insert the Following Pages</b>
i through xxviii	i through xxxiv
Preface-1 through Preface-6	Preface-1 through Preface-6
20-1 through 20-74	20-1 through 20-82
Index-1 through Index-22	Index-1 through Index-22



**Bellcore**

 Bell Communications Research

---

BELLCORE PRACTICE  
BR 007-252-004  
ISSUE 4, DECEMBER 1998  
RELEASE 5.3  
REVISION 1, FEBRUARY 1999

# MYNAH™ System Scripting Guide

*Bellcore*







**Bellcore**

 Bell Communications Research

---

BELLCORE PRACTICE  
BR 007-252-004  
ISSUE 4, DECEMBER 1998  
REVISION 1, FEBRUARY 1999

# MYNAH™ System Scripting Guide

Prepared for Bellcore by:  
Learning Support

For further information, please contact:  
MYNAH Customer Service Center  
1-(732) 699-2668, option 3

To obtain copies of this document, Regional Company/BCC personnel should contact their company's document coordinator; Bellcore personnel should call (732) 699-5802.

Copyright © 1996, 1999 Bellcore.

All rights reserved.

Appendix A, *Basic Tcl Commands*, is Copyright (c) 1993 The Regents of the University of California. All rights reserved.

In no event shall the University of California be liable to any party for direct, indirect, special, incidental, or consequential damages arising out of the use of this documentation, even if the University of California has been advised of the possibility of such damage.

The university of california specifically disclaims any warranties, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. the software provided hereunder is on an "as is" basis, and the University of California has no obligation to provide maintenance, support, updates, enhancements, or modifications.

Project funding year: 1999.



We at Bellcore are constantly striving to meet your need for information. Once you've had a chance to use this document that we've written for you, please let us know if it met your needs. Please complete this form and either FAX it to us at (732) 336-3345 or return it to us at the address below.

Document No. BR 007-252-004	Issue No. Issue 4	Publication Date December 1998	Revision No. 1	Supplement No.
--------------------------------	----------------------	-----------------------------------	-------------------	----------------

**1. In each of the following areas, how well did this document meet your need for information?**

	Missed	Nearly Met	Met	Exceeded	Not Applicable
a. Relevance of the information to your work .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
b. Ease of finding the information that you need .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
c. Clarity of the information.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
d. Accuracy of the information .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
e. Usefulness of the information .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
f. Thoroughness of the information .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
g. Level of detail of the information.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
h. Availability of this document when you needed it .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
i. Overall quality of this document .....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>

**2. Please comment on any of the areas where this document *did not* meet or exceed your need for information.**

\_\_\_\_\_

\_\_\_\_\_

**3. Are there features of this document that you found particularly useful or informative? Please explain.**

\_\_\_\_\_

\_\_\_\_\_

**4. Are there other ways that we can improve this document? Please feel free to comment on any aspect of it.**

\_\_\_\_\_

\_\_\_\_\_

**5. For what purpose did you use this document?**

- As a technical reference                       To use a system                       To learn methods/procedures
- As an administrative reference               To install/administer a system       To be better informed
- Other (please specify) \_\_\_\_\_

**6. Please tell us something about yourself.**

Your company/employer \_\_\_\_\_ Your title \_\_\_\_\_

Your job responsibilities \_\_\_\_\_

If you would like us to let you know what we're doing in response to your feedback, please write your name and address (or telephone number) below.

Name \_\_\_\_\_ Telephone Number \_\_\_\_\_

Address \_\_\_\_\_

*Thank you for your time and cooperation!*

To return this form, please FAX it to (732) 336-3345, or mail it to Ken Berczik, Bellcore Learning Support, 444 Hoes Lane, Room RRC 2B-183, Piscataway, NJ 08854.



## NOTICE OF DISCLAIMER AND LIMITATION OF LIABILITY

This document is intended for use solely by Bellcore customers who have licensed the Bellcore software described herein. The software, this document, and the information contained within this document may be used, copied or communicated only in accordance with the terms of a written license agreement with Bellcore. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording without the prior written permission of Bellcore. While the information contained herein has been prepared from sources deemed reliable, Bellcore reserves the right to revise the information without notice, but has no obligation to do so. Unless the recipient has been expressly granted a license by Bellcore under a separate applicable written agreement with Bellcore, no license, express or implied, is granted under any patents, copyrights or other intellectual property rights. Use of the information contained herein is in your sole determination and shall not be deemed an inducement by Bellcore to infringe any existing or later-issued patent, copyright or other intellectual property rights.

BELLCORE PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR AGAINST INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS. FURTHER, BELLCORE MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED WITH RESPECT TO THE SUFFICIENCY, ACCURACY, OR UTILITY OF ANY INFORMATION OR OPINION CONTAINED HEREIN. BELLCORE EXPRESSLY ADVISES THE USER THAT ANY USE OF OR RELIANCE UPON SAID INFORMATION OR OPINION IS AT THE SOLE RISK AND LIABILITY, IF ANY, OF THE USER AND THAT BELLCORE SHALL NOT BE LIABLE FOR ANY DAMAGE OR INJURY INCURRED BY ANY PERSON ARISING OUT OF THE SUFFICIENCY, ACCURACY, OR UTILITY OF ANY INFORMATION OR OPINION CONTAINED HEREIN. BELLCORE, ITS OWNERS AND AFFILIATES SHALL NOT BE LIABLE WITH RESPECT TO ANY CLAIM BEYOND THE AMOUNT OF ANY SUM ACTUALLY RECEIVED IN PAYMENT BY BELLCORE FOR THE DOCUMENTATION, AND IN NO EVENT SHALL BELLCORE, ITS OWNERS OR AFFILIATES BE LIABLE FOR LOST PROFITS OR OTHER INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

Bellcore does not recommend or endorse products and nothing contained herein is intended as a recommendation or endorsement of any product.

For further information, please contact:

The MYNAH Customer Service Center 8:00 AM and 7:00 PM ET Monday through Friday,  
(732) 699-2668, Option . If outside the 732 area, call (800) 795-3119, Option 3.

You can also contact support (for non critical problems) via e-mail at  
[mynah-support@cc.bellcore.com](mailto:mynah-support@cc.bellcore.com).

Copyright © 1999 Bellcore.  
All Rights Reserved.

## Trademark Acknowledgments

Adobe, Acorbat, and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

Microsoft, Windows, and NT are registered trademarks of Microsoft Corporation.

MYNAH is a trademark of Bellcore.

NeoSoft is a trademark of Neosoft, Inc.

QA Partner is a trademark of Segue Software, Inc.

Solaris is a trademark of Sun Microsystems, Inc.

SQA is a registered trademark of SQA, Inc.

UNIX is a registered trademark of Novell, Inc.

X Window System is a trademark of the Massachusetts Institute of Technology.



---

# MYNAH System Scripting Guide

## Contents

Introduction to Revision 1 .....	Revision-1
Reason for Revision.....	Revision-1
Preface .....	Preface-1
Document Structure .....	Preface-1
Related Documents .....	Preface-3
On-line Versions of the MYNAH Documents.....	Preface-3
Formatting Conventions.....	Preface-4
1. Introduction.....	1-1
1.1 Using the TclX Help Facility .....	1-2
1.2 MYNAH Extensions Overview .....	1-3
1.2.1 Extension Types.....	1-3
1.2.1.1 Class Commands .....	1-5
1.2.1.2 Instances .....	1-6
1.2.1.3 Handles .....	1-6
1.2.1.4 Methods .....	1-7
1.2.1.5 Attributes .....	1-8
1.2.2 Extension Functional Categories .....	1-10
2. General Scripting .....	2-1
2.1 Overview .....	2-1
2.1.1 Creation.....	2-1
2.1.2 Execution .....	2-2
2.2 Creating Scripts.....	2-3
2.2.1 Using an Editor to Create Code .....	2-3
2.2.2 Using the Script Object Code View to Create Code.....	2-4
2.2.3 Using the Script Builder to Create Code.....	2-6
2.3 Executing Scripts .....	2-8
2.3.1 Using the Script Builder to Execute Code .....	2-8
2.3.2 Using Background Execution .....	2-10
2.3.2.1 Background Execution Overview.....	2-10
2.3.2.2 How to Submit Scripts to the Background .....	2-11
2.3.2.2.1 From the CLUI.....	2-11
2.3.2.2.2 From the GUI .....	2-12
2.3.2.3 Background Execution and the Database .....	2-12
2.3.3 Using xmytclsh .....	2-12
2.3.4 Maximum number of Connections (concurrency).....	2-13

---

2.4	SE States at Start Time.....	2-14
2.4.1	Stateless Mode .....	2-14
2.4.2	ConnOnly Mode.....	2-14
2.4.3	FullState Mode.....	2-15
2.5	File Output .....	2-16
2.5.1	Determining How Many Output Directories to Retain .....	2-16
2.5.2	Location of the Output Files .....	2-16
2.5.2.1	Other Possible Locations .....	2-17
2.5.2.2	Output Directory Symbolic Link.....	2-17
2.5.3	Content of the Output Directory .....	2-18
2.5.4	SUTimage files .....	2-20
2.5.5	compares File .....	2-23
2.5.6	The Output File .....	2-25
2.5.6.1	Child Script Events .....	2-26
2.5.6.2	Compare Events.....	2-27
2.5.6.3	Exception (error) Events.....	2-28
2.5.6.4	Language Events.....	2-28
2.5.6.5	Script Events.....	2-29
2.5.6.6	Summary Events.....	2-30
2.5.6.7	Sutimage Events .....	2-31
2.5.6.8	SUT Timing (suttiming) Events .....	2-32
2.5.6.9	Test Object Events.....	2-32
2.5.6.10	User Events.....	2-33
2.5.7	The result File .....	2-34
2.5.7.1	Run Section.....	2-34
2.5.7.2	Summary Section.....	2-35
2.5.7.3	result File Example .....	2-35
2.6	Database Output .....	2-37
2.6.1	Runtime Objects.....	2-37
2.6.2	Result Objects .....	2-38
2.7	Execution Without Database Update .....	2-39
2.8	Loading Procedures.....	2-39
3.	Scripting Hints .....	3-1
3.1	Concealing Sensitive Data .....	3-1
3.1.1	Prompting for Sensitive Data using the Script Builder.....	3-1
3.1.2	Obtaining Sensitive Data for Scripts That Run in the Background ....	3-2
3.1.2.1	xmyUdb .....	3-3
3.1.2.2	xmyCmd scramble .....	3-3
3.1.2.3	Encrypted Database Files using des .....	3-4
3.1.2.4	Using an Encrypted File .....	3-6
3.1.2.4.1	Working With Keyed Lists .....	3-6
3.1.2.4.2	Example of Loading Data from Keyed Lists ....	3-7
3.1.3	Concealing Sensitive Data in Async SUTimages Files .....	3-8

---



---

3.2	Debugging - Dealing with Errors and Exceptions .....	3-9
3.2.1	Overview .....	3-9
3.2.2	Tcl Error/Exception Information Procedures.....	3-9
3.2.3	MYNAH Exception Handling .....	3-9
3.2.3.1	General Actions .....	3-10
3.2.3.2	Error Processing.....	3-10
3.3	Output Ownership Considerations .....	3-12
3.3.1	Execution Directory Permissions When Using the BEE .....	3-12
3.3.2	File Ownership When Using the BEE .....	3-12
3.4	Setting Output Levels.....	3-14
3.4.1	Returning the Current Output Level .....	3-15
3.4.2	Changing the Output Level.....	3-15
3.5	Script Termination .....	3-16
3.5.1	Using a Termination Procedure .....	3-16
3.5.2	Cleanup for Scripts Sent to ConnOnly and Fullstate SEs .....	3-17
3.5.3	Sample Code .....	3-17
3.6	UNIX Commands in Scripts .....	3-20
4.	Tcl Basics .....	4-1
4.1	Before We Begin.....	4-2
4.1.1	Examples in this Document .....	4-2
4.1.2	Basic Concepts and Definitions .....	4-2
4.1.3	set .....	4-3
4.1.4	unset .....	4-3
4.1.5	expr.....	4-4
4.1.6	incr .....	4-4
4.1.7	append .....	4-5
4.1.8	history.....	4-5
4.2	Expressions .....	4-7
4.2.1	Operands .....	4-7
4.2.2	Operators.....	4-8
4.2.2.1	Arithmetic Operators .....	4-8
4.2.2.2	Relational Operators .....	4-9
4.2.2.3	Logical Operators .....	4-9
4.2.2.4	Bitwise Operators .....	4-10
4.2.2.5	Choice Operator.....	4-10
4.2.2.6	Precedence .....	4-11
4.2.3	Mathematical Functions .....	4-13
4.2.4	Conversion .....	4-14
4.3	Tcl Syntax .....	4-15
4.3.1	Substitution .....	4-15
4.3.1.1	Variable.....	4-15
4.3.1.2	Command.....	4-15
4.3.1.3	Backslash .....	4-16

---

---

4.3.2	Quoting.....	4-18
4.3.2.1	Using Double Quotes.....	4-18
4.3.2.2	Using Braces.....	4-19
4.3.3	Comments .....	4-20
4.4	Lists and Arrays .....	4-21
4.4.1	Creating Lists .....	4-22
4.4.1.1	Using the set Command.....	4-22
4.4.1.2	concat.....	4-23
4.4.1.3	list .....	4-24
4.4.1.4	llength .....	4-25
4.4.2	Extracting Elements from a List - lindex .....	4-26
4.4.3	Modifying Lists.....	4-27
4.4.3.1	lappend.....	4-27
4.4.3.2	linsert .....	4-28
4.4.3.3	lreplace.....	4-29
4.4.3.4	lrange .....	4-30
4.4.4	Searching Lists - lsearch .....	4-31
4.4.5	Sorting Lists .....	4-32
4.4.6	Converting Between Strings and Lists.....	4-33
4.4.6.1	split .....	4-33
4.4.6.2	join.....	4-34
4.4.7	Arrays.....	4-35
4.5	Control Flows.....	4-36
4.5.1	if .....	4-36
4.5.2	Looping Commands .....	4-38
4.5.2.1	while .....	4-38
4.5.2.2	for.....	4-39
4.5.2.3	foreach .....	4-40
4.5.3	Looping Control .....	4-41
4.5.3.1	break .....	4-41
4.5.3.2	continue.....	4-42
4.5.4	switch .....	4-43
4.5.5	eval.....	4-45
4.6	Tcl Error/Exception Procedures .....	4-46
4.6.1	catch .....	4-46
4.6.2	Tcl Error Global Variables.....	4-47
4.6.2.1	errorCode .....	4-47
4.6.2.2	errorInfo.....	4-48
4.7	Procedures .....	4-50
4.7.1	proc.....	4-50
4.7.2	return .....	4-51
4.7.3	Local and Global Variables.....	4-51

---

---

4.8	String Manipulation .....	4-53
4.8.1	string match.....	4-53
4.8.2	regexp.....	4-54
4.9	File Input/Output.....	4-55
4.9.1	open.....	4-56
4.9.2	close .....	4-58
4.10	Using xmytclsh.....	4-59
4.11	Importing Scripts Using the source Command .....	4-60
5.	Using the Compare Master .....	5-1
5.1	Compare Master Basics.....	5-1
5.2	Region Dimension Restrictions.....	5-2
5.3	Suppressing the Compare Master.....	5-3
5.4	Example.....	5-3
6.	xmyVar Global Script Variables.....	6-1
6.1	Channel .....	6-1
6.2	CreateNewCompareMaster .....	6-2
6.3	DatabaseMode.....	6-3
6.4	EngineMode .....	6-4
6.5	EngineType .....	6-5
6.6	ExitHandler .....	6-6
6.7	FailedCompares.....	6-8
6.8	GoodCompares.....	6-10
6.9	LibraryPath.....	6-11
6.10	MaxFails.....	6-12
6.11	MaxFailsHandler.....	6-13
6.12	OutputDir .....	6-14
6.13	OutputLevel.....	6-14
6.14	RuntimeId.....	6-15
6.15	ScriptName.....	6-15
6.16	SEGroup.....	6-16
6.17	SubmittedBy.....	6-16
6.18	SymTbl.....	6-17
6.19	SymTblNAC .....	6-18
6.20	TestVersionId.....	6-18
6.21	TimeoutHandler .....	6-19
6.22	UpdateCompares .....	6-20
6.23	WarningCompares.....	6-21
7.	General MYNAH Tcl Extensions .....	7-1
7.1	Overview .....	7-1
7.2	General Commands .....	7-1
7.2.1	exit.....	7-3
7.2.2	xmyBegin .....	7-4
7.2.3	xmyCompare.....	7-6

---

---

7.2.4	xmyDate .....	7-8
7.2.5	xmyDiff .....	7-11
7.2.6	xmyEnd .....	7-15
7.2.7	xmyExit .....	7-16
7.2.8	xmyGetLine .....	7-17
7.2.9	xmyLoadPkg .....	7-18
7.2.10	xmyMask .....	7-20
	7.2.10.1 create .....	7-20
	7.2.10.2 destroy .....	7-22
	7.2.10.3 disable .....	7-23
	7.2.10.4 enable .....	7-23
7.2.11	xmyPrint .....	7-24
7.2.12	xmyPrompt .....	7-25
7.2.13	xmyReadGrep .....	7-26
7.2.14	xmyRegex .....	7-29
7.2.15	xmySimilar .....	7-31
7.2.16	xmySleep .....	7-32
7.2.17	xmySource .....	7-33
7.2.18	xmySymTblDel .....	7-34
7.2.19	xmySymTblExists .....	7-35
7.2.20	xmySymTblGet .....	7-36
7.2.21	xmySymTblPut .....	7-37
7.2.22	xmyUnloadPkg .....	7-38
7.2.23	xmyUpdateResult .....	7-39
7.3	Encryption Utilities .....	7-40
	7.3.1 xmyUdb .....	7-40
	7.3.2 xmyCmd scramble .....	7-42
7.4	Performance Measurement Functions .....	7-43
8.	Child Script Extension Package .....	8-1
8.1	Child Script Connection Methods .....	8-2
8.2	connect .....	8-2
	8.2.1 cancel .....	8-4
	8.2.2 destroy .....	8-5
	8.2.3 pause .....	8-6
	8.2.4 resume .....	8-7
	8.2.5 send .....	8-8
	8.2.6 sendWait .....	8-9
	8.2.7 wait .....	8-10
8.3	xmySE waitAll .....	8-11
8.4	xmySE waitAny .....	8-12
8.5	General Child Script Concerns .....	8-13
	8.5.1 Deadlock .....	8-13
	8.5.2 Zombie Processes .....	8-13

---

---

9.	TermAsync Extension Package .....	9-1
9.1	Overview .....	9-1
9.1.1	Methods Overview .....	9-1
9.1.2	Attributes Overview .....	9-2
9.2	System Prompts.....	9-4
9.3	Waiting for a Response .....	9-5
9.4	Adding an Extra Enter in a Script .....	9-6
9.5	xmyTermAsync class .....	9-7
9.5.1	Methods.....	9-7
9.5.1.1	compare.....	9-7
9.5.1.2	connect.....	9-9
9.5.1.3	disableMask .....	9-11
9.5.1.4	disconnect .....	9-12
9.5.1.5	enableMask .....	9-13
9.5.1.6	getAttributes .....	9-14
9.5.1.7	listAttributeTypes .....	9-15
9.5.1.8	response .....	9-16
9.5.1.9	screen .....	9-18
9.5.1.10	send.....	9-20
9.5.1.11	sendWait .....	9-22
9.5.1.12	wait .....	9-23
9.5.2	Attributes.....	9-25
9.5.2.1	-bufferlen .....	9-25
9.5.2.2	-column .....	9-25
9.5.2.3	-connections .....	9-26
9.5.2.4	-delay .....	9-26
9.5.2.5	-failedCompares.....	9-26
9.5.2.6	-goodCompares.....	9-27
9.5.2.7	-masks .....	9-27
9.5.2.8	-name .....	9-27
9.5.2.9	-position .....	9-28
9.5.2.10	-prompt .....	9-28
9.5.2.11	-row.....	9-28
9.5.2.12	-shell .....	9-28
9.5.2.13	-showAttributes.....	9-29
9.5.2.14	-size.....	9-29
9.5.2.15	-status.....	9-29
9.5.2.16	-terminal.....	9-30
9.5.2.17	-terminfo .....	9-30
9.5.2.18	-timeout.....	9-30
9.5.2.19	-warningCompares.....	9-30
9.5.2.20	-wildcard.....	9-31
9.5.3	Changing Configuration Parameters .....	9-32
9.5.4	Querying Configuration Parameters .....	9-32

---

---

9.6	Async Procedures .....	9-34
9.6.1	xmyPrintScreen .....	9-34
9.7	Async Scripting .....	9-35
10.	Term3270 Extension Package .....	10-1
10.1	Overview .....	10-1
10.1.1	Methods Overview .....	10-1
10.1.2	Attributes Overview .....	10-3
10.2	Term3270 Attribute Definitions .....	10-6
10.3	Term3270 Location Processing .....	10-9
10.3.1	Row/Column Processing .....	10-10
10.3.2	Label Processing .....	10-11
10.3.3	Tag Name Processing .....	10-12
10.4	xmyTerm3270 Class .....	10-14
10.4.1	Methods .....	10-14
10.4.1.1	compare .....	10-14
10.4.1.2	connect .....	10-16
10.4.1.3	disableMask .....	10-19
10.4.1.4	disconnect .....	10-20
10.4.1.5	enableMask .....	10-21
10.4.1.6	fieldBegin .....	10-22
10.4.1.7	fieldLength .....	10-23
10.4.1.8	fieldNext .....	10-24
10.4.1.9	find .....	10-25
10.4.1.10	findLabel .....	10-26
10.4.1.11	format .....	10-27
10.4.1.12	getAttribute .....	10-28
10.4.1.13	ignore .....	10-29
10.4.1.14	listAttributeTypes .....	10-30
10.4.1.15	moveCursor .....	10-31
10.4.1.16	screen .....	10-32
10.4.1.17	send .....	10-34
10.4.1.18	sendWait .....	10-35
10.4.1.19	type .....	10-36
10.4.1.20	wait .....	10-37
10.4.2	Attributes .....	10-39
10.4.2.1	-column (R) .....	10-39
10.4.2.2	-collectKeyCount (W/R) .....	10-39
10.4.2.3	-compareInvisibleFields (W/R) .....	10-40
10.4.2.4	-connections (R) .....	10-40
10.4.2.5	-dataBytesReceived (R) .....	10-40
10.4.2.6	-failedCompares (R) .....	10-41
10.4.2.7	-formatName (R) .....	10-41
10.4.2.8	-goodCompares (R) .....	10-41
10.4.2.9	-host (W/R) .....	10-42

---

---

10.4.2.10	-initialWait (W/R).....	10-42
10.4.2.11	-initialWaitExpect (W/R).....	10-42
10.4.2.12	-keyCount (R).....	10-43
10.4.2.13	-lastKeyPressed (R).....	10-43
10.4.2.14	-lastResponseTime (R).....	10-43
10.4.2.15	-lastTransmitTime (R).....	10-44
10.4.2.16	-masks (R).....	10-44
10.4.2.17	-model (W/R).....	10-44
10.4.2.18	-name (W/R).....	10-45
10.4.2.19	-port (W/R).....	10-45
10.4.2.20	-queryConnection (R).....	10-46
10.4.2.21	-row (R).....	10-46
10.4.2.22	-screenIdFile (W/R).....	10-46
10.4.2.23	-showAttributes (W/R).....	10-47
10.4.2.24	-status (R).....	10-47
10.4.2.25	-tagDir (W/R).....	10-47
10.4.2.26	-timeout (W/R).....	10-48
10.4.2.27	-TN3270E (W/R).....	10-48
10.4.2.28	-warningCompares (W/R).....	10-48
10.5	3270 Procedures.....	10-49
10.5.1	xmyPrintScreen.....	10-49
10.6	When to use send and sendWait Methods.....	10-50
10.6.1	MYNAH send and sendWait Methods.....	10-50
10.6.2	Summarization.....	10-51
11.	General Application-to-Application Tcl Language Extensions.....	11-1
11.1	Overview.....	11-1
11.1.1	Methods Overview.....	11-2
11.1.2	Attributes Overview.....	11-3
11.2	xmyAppApp class.....	11-5
11.2.1	Methods.....	11-5
11.2.1.1	connect.....	11-5
11.2.1.2	delete.....	11-7
11.2.1.3	disconnect.....	11-8
11.2.1.4	receive.....	11-9
11.2.1.5	send.....	11-11
11.2.2	Attributes.....	11-13
11.2.2.1	-append.....	11-13
11.2.2.2	-broadcast.....	11-15
11.2.2.3	-connections.....	11-16
11.2.2.4	-connId.....	11-17
11.2.2.5	-data.....	11-18
11.2.2.6	-file.....	11-19
11.2.2.7	-IFhost.....	11-20
11.2.2.8	-listen.....	11-21

---

---

11.2.2.9	-match .....	11-23
11.2.2.10	-maxMsgs .....	11-25
11.2.2.11	-name .....	11-26
11.2.2.12	-recvPort .....	11-27
11.2.2.13	-recvStatus .....	11-28
11.2.2.14	-recvTime.....	11-29
11.2.2.15	-sendPort.....	11-30
11.2.2.16	-sendStatus.....	11-31
11.2.2.17	-sendTime .....	11-32
11.2.2.18	-timeout.....	11-33
11.3	Example.....	11-34
12.	TOP Tcl Language Extension.....	12-1
12.1	Overview .....	12-1
12.1.1	Methods Overview .....	12-2
12.1.2	Attributes Overview .....	12-3
12.2	xmyTop class .....	12-5
12.2.1	Methods.....	12-5
12.2.1.1	connect.....	12-5
12.2.1.2	disconnect .....	12-7
12.2.1.3	receive.....	12-8
12.2.1.4	send.....	12-10
12.2.2	Attributes.....	12-12
12.2.2.1	-append .....	12-12
12.2.2.2	-connections.....	12-14
12.2.2.3	-conversion .....	12-15
12.2.2.4	-data .....	12-16
12.2.2.5	-dtm.....	12-17
12.2.2.6	-file.....	12-18
12.2.2.7	-listen .....	12-19
12.2.2.8	-match .....	12-21
12.2.2.9	-maxMsgs .....	12-23
12.2.2.10	-maxSegmentLen.....	12-24
12.2.2.11	-name .....	12-25
12.2.2.12	-psn .....	12-26
12.2.2.13	-recvSession.....	12-27
12.2.2.14	-recvStatus .....	12-28
12.2.2.15	-recvTime.....	12-29
12.2.2.16	-sendSession .....	12-30
12.2.2.17	-sendStatus.....	12-31
12.2.2.18	-sendTime .....	12-32
12.2.2.19	-timeout.....	12-33
12.2.2.20	-topcom.....	12-34

---



---

12.3	Examples .....	12-35
12.3.1	Example 1 .....	12-35
12.3.2	Example 2 .....	12-36
13.	PRT3270 Tcl Language Extensions.....	13-1
13.1	Overview .....	13-1
13.1.1	Methods Overview .....	13-2
13.1.2	Attributes Overview .....	13-3
13.2	xmyPrt3270 class .....	13-5
13.2.1	Methods.....	13-5
13.2.1.1	connect.....	13-5
13.2.1.2	disconnect .....	13-7
13.2.1.3	receive.....	13-8
13.2.2	Attributes.....	13-10
13.2.2.1	-append .....	13-10
13.2.2.2	-connections\.....	13-12
13.2.2.3	-conversion .....	13-13
13.2.2.4	-data .....	13-14
13.2.2.5	-file.....	13-15
13.2.2.6	-listen .....	13-16
13.2.2.7	-match .....	13-17
13.2.2.8	-maxMsgs .....	13-19
13.2.2.9	-name .....	13-20
13.2.2.10	-printcom.....	13-21
13.2.2.11	-recvSession.....	13-22
13.2.2.12	-recvStatus .....	13-22
13.2.2.13	-recvTime.....	13-23
13.2.2.14	-timeout.....	13-24
13.3	Example.....	13-25
14.	FCIF Tcl Language Extensions.....	14-1
14.1	Overview .....	14-1
14.1.1	Methods Overview .....	14-1
14.2	xmyFcif Class.....	14-2
14.2.1	Methods.....	14-3
14.2.1.1	create.....	14-3
14.2.1.2	compare.....	14-5
14.2.1.3	compareTags.....	14-7
14.2.1.4	destroy.....	14-10
14.2.1.5	extraTags.....	14-11
14.2.1.6	getTag .....	14-13
14.2.1.7	reorder.....	14-14
15.	Message Response Directory Tcl Language Extensions .....	15-1
15.1	xmyMsgDir class .....	15-2
15.1.1	Methods.....	15-2

---

---

15.1.1.1	close .....	15-2
15.1.1.2	delete.....	15-3
15.1.1.3	open.....	15-4
15.1.2	Attributes.....	15-5
15.1.2.1	-data .....	15-5
15.1.2.2	-file.....	15-6
15.1.2.3	-first.....	15-7
15.1.2.4	-handler .....	15-8
15.1.2.5	-last .....	15-9
15.1.2.6	-marked .....	15-10
15.1.2.7	-maxMsgs .....	15-11
15.1.2.8	-move .....	15-12
15.1.2.9	-msgDir .....	15-13
15.1.2.10	-next .....	15-14
15.1.2.11	-numMsgs .....	15-15
15.1.2.12	-position .....	15-16
15.1.2.13	-prev .....	15-17
15.1.2.14	-printcom.....	15-18
15.1.2.15	-recvSession.....	15-19
15.1.2.16	-subDir .....	15-20
15.1.2.17	-topcom .....	15-21
15.1.3	Example .....	15-22
15.2	Match Tcl Extensions.....	15-23
15.2.1	xmyMsgMatch .....	15-23
15.2.2	xmyMsgMatchUntil .....	15-25
15.2.3	xmyMsgMatchNext .....	15-27
15.3	Marking/Unmarking Messages - xmyMsgMarkFile.....	15-28
16.	TCP App-to-App Tcl Language Extensions .....	16-1
16.1	Overview .....	16-1
16.1.1	Methods Overview .....	16-2
16.1.2	Attributes Overview .....	16-3
16.2	xmyTcp Class.....	16-5
16.2.1	Methods.....	16-5
16.2.1.1	accept .....	16-5
16.2.1.2	connect.....	16-7
16.2.1.3	delete.....	16-9
16.2.1.4	disconnect .....	16-10
16.2.1.5	receive.....	16-11
16.2.1.6	send.....	16-13
16.2.2	Attributes.....	16-15
16.2.2.1	-append .....	16-15
16.2.2.2	-appName.....	16-17
16.2.2.3	-broadcast.....	16-18
16.2.2.4	-connections .....	16-19

---

---

16.2.2.5	-connId.....	16-20
16.2.2.6	-data .....	16-21
16.2.2.7	-file.....	16-22
16.2.2.8	-host .....	16-23
16.2.2.9	-listen .....	16-24
16.2.2.10	-match .....	16-26
16.2.2.11	-maxMsgs .....	16-28
16.2.2.12	-name .....	16-29
16.2.2.13	-port.....	16-30
16.2.2.14	-recvStatus .....	16-31
16.2.2.15	-recvTime.....	16-32
16.2.2.16	-sendStatus.....	16-33
16.2.2.17	-sendTime .....	16-34
16.2.2.18	-srcHost.....	16-35
16.2.2.19	-srcPort.....	16-36
16.2.2.20	-timeout.....	16-37
16.3	Example.....	16-38
17.	Batch Tcl Language Extensions.....	17-1
17.1	Accessing The Batch Procedures .....	17-1
17.2	Submitting a Batch Job - batch_submit .....	17-1
17.3	Methods.....	17-5
17.3.1	batch_delete .....	17-5
17.3.2	batch_host .....	17-7
17.3.3	batch_jobid.....	17-8
17.3.4	batch_status.....	17-9
17.3.5	batch_step_count.....	17-10
17.3.6	batch_step_result.....	17-11
17.3.7	batch_wait .....	17-13
17.4	The .netrc file .....	17-14
18.	DCE Extension Package .....	18-1
18.1	DCE Overview .....	18-2
18.1.1	DCE Architecture.....	18-2
18.1.2	Interface Definition.....	18-2
18.1.3	IDL File.....	18-3
18.2	Developing a DCE Application .....	18-3
18.2.1	DCE Client Development .....	18-3
18.2.2	DCE Server Development.....	18-3
18.3	Overview of Scripting.....	18-4
18.3.1	Emulated Client.....	18-4
18.3.2	Emulated Server .....	18-4
18.4	Using the Emulated Client and Emulated Server in MYNAH System.....	18-5
18.4.1	Overview .....	18-5
18.4.2	Using the Emulated Client .....	18-5

---

---

18.4.2.1	xmyDceStartClient .....	18-5
18.4.2.2	xmyDceWaitForClient.....	18-7
18.4.3	Using the Emulated Server .....	18-8
18.4.3.1	xmyDceStartServer.....	18-8
18.4.3.2	xmyDceWaitForServer.....	18-9
18.4.4	Using the Emulated Server for Starting a Long-Running Server ...	18-10
18.4.4.1	xmyDceStartIndependentServer.....	18-10
18.5	Interface Object.....	18-11
18.5.1	name.....	18-11
18.5.2	uuid.....	18-11
18.5.3	major-version .....	18-11
18.5.4	minor-version .....	18-12
18.5.5	isClient .....	18-12
18.5.6	isServer.....	18-12
18.5.7	constants.....	18-13
18.5.8	types .....	18-13
18.5.9	rpcs .....	18-13
18.6	IDL Types .....	18-14
18.6.1	array .....	18-17
18.6.1.1	make-array Constructor .....	18-17
18.6.1.2	elements Method.....	18-17
18.6.1.3	index Method.....	18-18
18.6.2	bool.....	18-19
18.6.2.1	make-bool Constructor .....	18-19
18.6.2.2	get Method.....	18-19
18.6.2.3	set Method .....	18-20
18.6.3	buffer.....	18-21
18.6.3.1	make-buffer Constructor.....	18-21
18.6.3.2	get Method.....	18-21
18.6.3.3	set Method .....	18-22
18.6.3.4	length Method.....	18-22
18.6.4	byte.....	18-23
18.6.4.1	make-byte Constructor.....	18-23
18.6.4.2	get Method .....	18-23
18.6.4.3	set Method .....	18-24
18.6.5	char.....	18-25
18.6.5.1	make-char Constructor.....	18-25
18.6.5.2	get Method .....	18-25
18.6.5.3	set Method .....	18-26
18.6.6	double.....	18-27
18.6.6.1	make-double Constructor.....	18-27
18.6.6.2	get Method .....	18-27
18.6.6.3	set Method .....	18-28

---

---

18.6.7	enumeration.....	18-29
18.6.7.1	make-enum Constructor.....	18-29
18.6.7.2	get Method.....	18-29
18.6.7.3	set Method.....	18-30
18.6.7.4	values Method.....	18-30
18.6.8	error_status_t.....	18-31
18.6.8.1	make-error_status_t Constructor.....	18-31
18.6.8.2	get Method.....	18-31
18.6.8.3	set Method.....	18-32
18.6.8.4	values Method.....	18-32
18.6.9	float.....	18-33
18.6.9.1	make-float Constructor.....	18-33
18.6.9.2	get Method.....	18-33
18.6.9.3	set Method.....	18-34
18.6.10	handle_t.....	18-35
18.6.10.1	make-handle_t Constructor.....	18-35
18.6.10.2	make uuid_t Constructor.....	18-35
18.6.10.3	get Method.....	18-36
18.6.10.4	get Method.....	18-36
18.6.10.5	set Method.....	18-37
18.6.10.6	set Method.....	18-37
18.6.10.7	bind Method.....	18-37
18.6.10.8	setAuthentication Method.....	18-39
18.6.11	hyper.....	18-40
18.6.11.1	make-hyper Constructor.....	18-40
18.6.11.2	get Method.....	18-40
18.6.11.3	set Method.....	18-41
18.6.12	long.....	18-42
18.6.12.1	make-long Constructor.....	18-42
18.6.12.2	get Method.....	18-42
18.6.12.3	set Method.....	18-43
18.6.13	pipe.....	18-44
18.6.13.1	make- <i>pipe</i> Constructor.....	18-44
18.6.13.2	setInputFilename Method.....	18-44
18.6.13.3	setOutputFilename Method.....	18-45
18.6.13.4	dumpFile Method.....	18-45
18.6.13.5	readFile Method.....	18-46
18.6.14	pointer.....	18-47
18.6.14.1	make-pointer Constructor.....	18-47
18.6.14.2	get Method.....	18-47
18.6.14.3	set Method.....	18-48
18.6.14.4	-> (dereference) Method.....	18-48
18.6.14.5	get-pointer-contents Method.....	18-49

---

---

18.6.15	short.....	18-50
18.6.15.1	make-short Constructor .....	18-50
18.6.15.2	get Method .....	18-50
18.6.15.3	set Method .....	18-51
18.6.16	small.....	18-52
18.6.16.1	make-small Constructor.....	18-52
18.6.16.2	get Method .....	18-52
18.6.16.3	set Method .....	18-53
18.6.17	string.....	18-54
18.6.17.1	make-string Constructor .....	18-54
18.6.17.2	get Method.....	18-54
18.6.17.3	set Method .....	18-55
18.6.18	structure.....	18-56
18.6.18.1	make-struct Constructor.....	18-56
18.6.18.2	make-struct Constructor Containing a Conformant Array.....	18-56
18.6.18.3	members Method .....	18-57
18.6.18.4	memberName Method .....	18-57
18.6.19	uhyper.....	18-58
18.6.19.1	make-uhyper Constructor .....	18-58
18.6.19.2	get Method.....	18-58
18.6.19.3	set Method .....	18-59
18.6.20	ulong.....	18-60
18.6.20.1	make-ulong Constructor .....	18-60
18.6.20.2	get Method.....	18-60
18.6.20.3	set Method .....	18-61
18.6.21	union.....	18-62
18.6.21.1	make-union Constructor .....	18-62
18.6.21.2	members Method .....	18-62
18.6.21.3	memberName Method .....	18-63
18.6.21.4	tagName Method .....	18-63
18.6.21.5	tagName Method to Retrieve Discriminant.....	18-64
18.6.21.6	currentTag Method .....	18-64
18.6.22	ushort.....	18-65
18.6.22.1	make-ushort Constructor .....	18-65
18.6.22.2	get .....	18-65
18.6.22.3	set.....	18-66
18.6.23	usmall .....	18-67
18.6.23.1	make-usmall Constructor.....	18-67
18.6.23.2	get Method.....	18-67
18.6.23.3	set Method .....	18-68
18.7	RPC Calls in the Emulated Client.....	18-69
18.8	Printing Objects.....	18-70
18.8.1	print .....	18-70

---

---

18.9	Getting the Type of an Object - typeOfHandle .....	18-71
18.10	RPC Calls in the Emulated Server .....	18-72
18.11	Constants .....	18-73
18.12	Destroying Objects .....	18-74
18.12.1	destroy .....	18-74
18.13	Deleting Handles and Objects .....	18-75
18.13.1	xmyDceScope .....	18-75
18.13.2	Methods Supporting the Deletion of Objects .....	18-76
18.13.2.1	xmyDceDeleteHandles .....	18-76
18.13.2.2	xmyDceDeleteAllHandles .....	18-77
18.13.2.3	xmyDceDeleteDataHandles .....	18-77
18.13.2.4	xmyDceSaveHandles .....	18-78
18.13.2.5	xmyDceRestoreHandles .....	18-78
18.14	Getting the Interface- xmyDceInterface .....	18-79
18.15	DCE/Async Commands .....	18-80
18.15.1	xmyDceRecordEnterOperation .....	18-80
18.15.2	xmyDceRecordExitOperation .....	18-81
18.15.3	xmyDceCallRpc .....	18-82
19.	GUI Tcl Language Extensions .....	19-1
19.1	Accessing the MYNAH Symbol Table .....	19-1
19.2	SQA Pointer Scripts .....	19-2
20.	Conversion Runtime Procedures .....	20-1
20.1	FIN Scripts .....	20-1
20.1.1	ASYNCconnect .....	20-2
20.1.2	xmyBreakLines / (compare-lines, print-response, log-for-phaser) ...	20-3
20.1.3	xmyCompareLines / compare-lines .....	20-5
20.1.4	xmyGetEnvFin / getenv .....	20-6
20.1.5	xmyLastPart / last-part .....	20-7
20.1.6	xmy_ListToAttributeFin / atr .....	20-8
20.1.7	xmyRecordCompareFin / (test, compare-lines) .....	20-9
20.1.8	xmySetOutputLevelFin / print-level .....	20-11
20.1.9	xmyTransKeyFin .....	20-12
20.2	FUR Scripts .....	20-13
20.2.1	3270connect .....	20-14
20.2.2	xmyAddMask / add_mask .....	20-15
20.2.3	xmyDisableMask / disable_mask .....	20-16
20.2.4	xmyEnableMask / enable_mask .....	20-17
20.2.5	xmyFieldBegin / fldbeg, fldbeg_tag .....	20-18
20.2.6	xmyFieldNext / fldnext .....	20-20
20.2.7	xmyFieldNextTag / fldnext_tag .....	20-22
20.2.8	xmyGetEnvFur / getenv .....	20-24
20.2.9	xmy_ListToAttributeFur / (atr, atr_tag) .....	20-25

---

---

20.2.10	xmy_ListToPositionFur / (col, fldbeg, fldbeg_tag, fldnext, fldnext_tag).....	20-26
20.2.11	xmyMoveCursorPattern / move_cursor_pattern .....	20-27
20.2.12	xmyReconnect / reconnect .....	20-28
20.2.13	xmyRecordCompareFur / test .....	20-29
20.2.14	xmySetOutputLevelFur / print-level .....	20-30
20.3	FIN and FUR Scripts.....	20-31
20.3.1	xmyEOF / eof.....	20-32
20.3.2	xmyAddMonth / addmonth.....	20-33
20.3.3	xmyAToN / aton .....	20-34
20.3.4	xmyBreakPoint / breakpoint .....	20-35
20.3.5	xmyCallPrompt / prompt .....	20-36
20.3.6	xmyCallShell / shell .....	20-37
20.3.7	xmyExpand / \$ .....	20-38
20.3.8	xmyFindLibPath ( load ).....	20-39
20.3.9	xmyKeylGetKey / dbget-key .....	20-40
20.3.10	xmyMultiPrompt / multiprompt.....	20-41
20.3.11	xmyMultiPromptField.....	20-42
20.3.12	xmy_Open / open .....	20-44
20.3.13	xmyRand / rand.....	20-45
20.3.14	xmyReadbreak / read .....	20-46
20.3.15	xmySetZero .....	20-47
20.3.16	xmySubString / substring.....	20-48
20.3.17	xmyTCLTransRE / (rematch, adiff, addmask) .....	20-49
20.3.18	xmyTrim / trim.....	20-50
20.3.19	xmyTypeOf / typeof.....	20-51
20.4	Converted ADDAM Scripts .....	20-52
20.4.1	checktags / checktags .....	20-53
20.4.2	create_dot_out_file.....	20-54
20.4.3	export / export .....	20-55
20.4.4	extratags / extratags.....	20-56
20.4.5	fcifcomp / fcifcomp.....	20-57
20.4.6	fciffield / fciffield.....	20-58
20.4.7	fcifmatch / fcifmatch.....	20-59
20.4.8	get_parm.....	20-60
20.4.9	postincr .....	20-61
20.4.10	printf / printf.....	20-62
20.4.11	prt3270_connect.....	20-63
20.4.12	readfile / readfile .....	20-64
20.4.13	reorder / reorder .....	20-65
20.4.14	setvl / setvl .....	20-66
20.4.15	soprespc / soprespc.....	20-67
20.4.16	sprintf / sprintf.....	20-68
20.4.17	substr / substr .....	20-69

---



---

20.4.18	top_connect .....	20-70
20.4.19	v1 / v1 .....	20-71
20.4.20	xmyImport / import .....	20-72
20.5	Converted Tsf Scripts .....	20-73
20.5.1	add_to_syntab_if_not_already_there .....	20-74
20.5.2	send_app_to_app_message .....	20-75
20.5.3	send_script .....	20-76
20.5.4	send_script_and_check_threshold .....	20-77
20.5.5	set_up_parent_script .....	20-78
20.5.6	wait_for_child_scripts .....	20-79
20.5.7	xmyAddToSymTbl .....	20-80
20.5.8	xmyRunTestEvents .....	20-81
Appendix A:	Basic Tcl Commands .....	A-1
A.1	append .....	A-2
A.2	array .....	A-3
A.3	break .....	A-5
A.4	case .....	A-6
A.5	catch .....	A-7
A.6	cd .....	A-8
A.7	close .....	A-9
A.8	concat .....	A-10
A.9	continue .....	A-11
A.10	eof .....	A-12
A.11	error .....	A-13
A.12	eval .....	A-14
A.13	exec .....	A-15
A.14	exit .....	A-18
A.15	expr .....	A-19
A.16	file .....	A-24
A.17	flush .....	A-27
A.18	for .....	A-28
A.19	foreach .....	A-29
A.20	format .....	A-30
A.21	gets .....	A-33
A.22	glob .....	A-34
A.23	global .....	A-35
A.24	history .....	A-36
A.25	if .....	A-39
A.26	incr .....	A-40
A.27	info .....	A-41
A.28	join .....	A-44
A.29	lappend .....	A-45
A.30	library .....	A-46
A.31	lindex .....	A-50

---

A.32 linsert.....	A-51
A.33 list.....	A-52
A.34 llength.....	A-53
A.35 lrange.....	A-54
A.36 lreplace.....	A-55
A.37 lsearch.....	A-56
A.38 lsort.....	A-57
A.39 open.....	A-58
A.40 pid.....	A-60
A.41 proc.....	A-61
A.42 puts.....	A-62
A.43 pwd.....	A-63
A.44 read.....	A-64
A.45 regexp.....	A-65
A.46 regsub.....	A-68
A.47 rename.....	A-69
A.48 return.....	A-70
A.49 scan.....	A-72
A.50 seek.....	A-74
A.51 set.....	A-75
A.52 source.....	A-76
A.53 split.....	A-77
A.54 string.....	A-78
A.55 switch.....	A-80
A.56 tclvars.....	A-82
A.57 tell.....	A-85
A.58 time.....	A-86
A.59 trace.....	A-87
A.60 unknown.....	A-90
A.61 unset.....	A-91
A.62 uplevel.....	A-92
A.63 upvar.....	A-93
A.64 while.....	A-94
Glossary.....	Glossary-1
Index.....	Index-1

---

---

## List of Figures

Figure 1-1.	tclhelp Window.....	1-2
Figure 1-2.	tclhelp Tcl Subjects Window.....	1-2
Figure 2-1.	MYNAH GUI Script Object Code View.....	2-5
Figure 2-2.	MYNAH Script Builder Code View .....	2-7
Figure 2-3.	Script Builder Execution Progress Dialog.....	2-9
Figure 2-4.	Script Builder Remote Connection Execution Window.....	2-9
Figure 2-5.	Background Script Execution Environment .....	2-11
Figure 3-1.	xmyPrompt Window.....	3-1
Figure 3-2.	Example Window Prompting for des Key.....	3-5
Figure 3-3.	Error Processing Example .....	3-10
Figure 3-4.	Example 3270 Logon Window.....	3-11
Figure 3-5.	Example Script to Change Permissions of Output Files.....	3-13
Figure 3-6.	Example Script Termination Procedures .....	3-18
Figure 3-7.	Example SUT Log Off Script.....	3-18
Figure 3-8.	Example System Log Off Procedure .....	3-19
Figure 3-9.	Example Script Exit Procedure.....	3-19
Figure 4-1.	Floating-Point Number Examples .....	4-7
Figure 9-1.	Sample TermAsync Script 1 .....	9-35
Figure 9-2.	Sample TermAsync Script 2.....	9-36
Figure 9-3.	Sample TermAsync Script 2.....	9-37
Figure 10-1.	Example 3270 Screen .....	10-10
Figure 11-1.	MYNAH General AppApp Interactions.....	11-1
Figure 12-1.	MYNAH TOPCOM Interactions.....	12-1
Figure 13-1.	MYNAH PRT3270 Interactions .....	13-1

---

## List of Tables

Table 1.	MYNAH Language Guide Sections .....	Preface-1
Table 1-1.	WWW Tcl Home Pages .....	1-1
Table 1-2.	Example Class Commands, Methods, and Attributes .....	1-4
Table 1-3.	MYNAH Tcl Extension Functional Categories.....	1-10
Table 4-1.	Section Contents .....	4-1
Table 4-2.	Tcl Number Base Example.....	4-7
Table 4-3.	Tcl Arithmetic Operators.....	4-8
Table 4-4.	Tcl Relational Operators.....	4-9
Table 4-5.	Tcl Logical Operators .....	4-9
Table 4-6.	Tcl Bitwise Operators .....	4-10
Table 4-7.	Tcl Operator Precedence .....	4-11
Table 4-8.	Tcl Trig Functions .....	4-13
Table 4-9.	Tcl Math Functions.....	4-14
Table 4-10.	Tcl Backslash Sequences.....	4-17
Table 5-1.	Comparison Extensions .....	5-1
Table 7-1.	General MYNAH Extensions .....	7-1
Table 7-2.	Loadable MYNAH Packages .....	7-18
Table 8-1.	xmySE (Child Script) Methods .....	8-1
Table 9-1.	TermAsync Method Extensions .....	9-1
Table 9-2.	TermAsync Attribute Extensions .....	9-2
Table 10-1.	Term3270 Method Extensions.....	10-1
Table 10-2.	Term3270 Attribute Extensions.....	10-3
Table 10-3.	Term3270 Attribute Definitions .....	10-6
Table 10-4.	3270 Function Keys.....	10-34
Table 11-1.	AppApp Method Extensions .....	11-2
Table 11-2.	AppApp Attribute Extensions .....	11-3
Table 12-1.	TOP Method Extensions.....	12-2
Table 12-2.	TOP Attribute Extensions.....	12-3
Table 13-1.	PRT3270 Method Extensions.....	13-2
Table 13-2.	PRT3270 Attribute Extensions.....	13-3
Table 14-1.	FCIF Method Extensions.....	14-1
Table 15-1.	Message Response Directory Tcl Language Extension Categories .....	15-1
Table 16-1.	TCP Method Extensions.....	16-2
Table 16-2.	TCP Attribute Extensions.....	16-3
Table 18-1.	MYNAH DCE Extension Sections.....	18-1
Table 18-2.	DCE IDL Type Extensions.....	18-14
Table 19-1.	Choosing a GUI Test Tool Include Script.....	19-1
Table 19-2.	GUI Test Tool Symbol Table Extensions.....	19-2
Table 20-1.	FIN Commands to MYNAH 5.3 Mappings .....	20-1
Table 20-2.	FUR Commands to MYNAH 5.3 Mappings .....	20-13
Table 20-3.	FIN and FUR Commands to MYNAH 5.3 Mappings.....	20-31

Table 20-4. ADDAM Commands to MYNAH 5.3 Mappings.....20-52  
Table 20-5. Tsf Commands to MYNAH 5.3 Mappings .....20-73



## Introduction to Revision 1

Please use the following instructions to update your document, BR 007-252-004, Issue 4 , December 1998.

<b>Remove from Issue 4</b>	<b>Replace with Revision sections</b>
Table of Contents	Table of Contents
List of Figures	List of Figures
List of Tables	List of Tables
Preface	Preface
Section 20	Section 20
Index	Index

### Reason for Revision

[Section 20, “Conversion Runtime Procedures”](#) of this Guide has been revised to enhance the runtime procedures descriptions and examples.

Change bars (|) highlight changes in this revision.





## Preface

### Document Structure

This document contains a section on the basics of the Tcl language, a section on the TclX extensions, and separate sections on each of MYNAH™ Tcl extensions.

[Table 1](#) list the sections in this document with a brief description of each section.

**Table 1.** MYNAH Language Guide Sections (Sheet 1 of 3)

Section Number	Section Name	Description
<a href="#">Section 1</a>	Introduction	This section contains general information on this guide, including an overview of concepts shared by all of the MYNAH packages.
<a href="#">Section 2</a>	General Scripting	This section discusses the basics behind scripting, including creation, execution, file output, and database output.
<a href="#">Section 3</a>	Scripting Hints	This section contains hints that you may find useful as you create your scripts, including concealing sensitive data, script termination, and debugging.
<a href="#">Section 4</a>	Tcl Basics	This section is a basic introduction to the Tcl language.
<a href="#">Section 5</a>	Using the Compare Master	This section describes the Compare Master feature.
<a href="#">Section 6</a>	xmyVar Global Script Variables	This section contains the complete list of the variables in the global <b>xmyVar</b> array.
<a href="#">Section 7</a>	General MYNAH Tcl Extensions	This section describes the set of Tcl extensions that are available to a script automatically when it starts executing as well as describing an array of global MYNAH-specific variables that are provided to the script.
<a href="#">Section 8</a>	Child Script Extension Package	This section describes the set of Tcl extensions for the Child Script Package, which is used to start and control script execution from a parent script.
<a href="#">Section 9</a>	TermAsync Extension Package	This section describes the asynchronous Tcl extensions that provide interactions with an asynchronous terminal device.

**Table 1.** MYNAH Language Guide Sections (Sheet 2 of 3)

<b>Section Number</b>	<b>Section Name</b>	<b>Description</b>
<a href="#">Section 10</a>	Term3270 Extension Package	This section describes the 3270 Tcl extensions that provide the functions necessary for interactions with a 3270 device.
<a href="#">Section 11</a>	General Application-to-Application Tcl Language Extensions	This section describes the General Application-to-Application (AppApp) extensions that provide the functionality necessary for interaction with a SUT thru an application specific interface.
<a href="#">Section 12</a>	TOP Tcl Language Extension	This section describes the Tcl extensions that provide support for automated interactions with the System Under Test (SUT) on the TOP/TCP/IP application-to-application interface.
<a href="#">Section 13</a>	PRT3270 Tcl Language Extensions	This section describes the Tcl extensions that emulate a 3270 printer so that you can capture messages that a SUT sends to a printer.
<a href="#">Section 14</a>	FCIF Tcl Language Extensions	This section describes the Tcl extensions that process and analyze Flexible Computer Interface Format (FCIF) messages.
<a href="#">Section 15</a>	Message Response Directory Tcl Language Extensions	This section describes the Tcl extensions that provide a mechanism to easily scan all messages that have arrived on a particular communications channel and have been saved to disk.
<a href="#">Section 17</a>	Batch Tcl Language Extensions	This section describes the Tcl extensions that emulate running batch jobs.
<a href="#">Section 18</a>	DCE Extension Package	This section describes the Tcl extensions that provide the functions necessary for interactions with a Distributed Computing Environment (DCE).
<a href="#">Section 19</a>	GUI Tcl Language Extensions	This section describes the Tcl extensions that provide access to GUI test applications.
<a href="#">Section 20</a>	Conversion Runtime Procedures	This section describes the Tcl procedures supplied with the MYNAH System that support the runtime environment for scripts converted from MYNAH 4.x.

**Table 1.** MYNAH Language Guide Sections (Sheet 3 of 3)

Section Number	Section Name	Description
<a href="#">Appendix A</a>	Basic Tcl Commands	This appendix contains a reproduction of the Tcl manual pages, covering all of the commands in the basic Tcl command set.
Glossary	Glossary	This section contains a glossary of terms related to the MYNAH System.

**NOTE** — While separate packages, the combination of the TOPCOM, PRT3270, FCIF, and General AppApp packages provide complete functions needed to emulate interactions between applications. Therefore, these packages are often referred to as being part of the AppApp package.

## Related Documents

- *BR 007-252-001, MYNAH System Administration Guide*
- *BR 007-252-002, MYNAH System Users Guide*

## On-line Versions of the MYNAH Documents

The MYNAH documents are available on-line in the Adobe<sup>®</sup> Acrobat<sup>®</sup> PDF format. The PDF files are accessible from either the local file system or from an internal URL. See the MYNAH administrator for the location of the PDF files.

Viewing the PDF files require that you have installed the Adobe Acrobat Reader<sup>®</sup>. If you need the Acrobat Reader, contact the MYNAH administrator. In addition, you can download the Acrobat Reader directly (off the Internet) from Adobe at [www.adobe.com](http://www.adobe.com).

Once you have installed the Acrobat Reader, you can read the files

- Using the Acrobat Reader directly if the MYNAH System has been installed on a local system.
- Using the Acrobat Reader as plug-in to a browser if the MYNAH System has not been installed on a local system, such as if the system has been installed on a UNIX<sup>®</sup> Solaris<sup>™</sup> server and you are using an X-windows<sup>™</sup> emulator to access the system on a PC. Consult your browser's documentation for information on how to install plug-ins.

If you access the PDF files via a browser, you may wish to download the files to your local system, which will give you direct access to a file the next time you need to read it, rather than waiting for the browser to load it.

## Formatting Conventions

When a term is being defined, e.g. **method**, it appears in Bold Helvetica.

The extension entries are described using the following structure and formatting conventions:

### Syntax

```
class_command_name connection_method \  
    -argument_name argument_value\  
    ?-argument_name argument_value?  
  
handle method_name -argument_name argument_value\  
    ?-argument_name argument_value?  
  
handle -attribute_name ?attribute_value?  
  
class_command_name -attribute ?new_default_attribute_value?
```

### Return

This is a brief statement of the return value this extension generates.

### Description

The syntax section uses the following formatting conventions:

- Class command, method, attribute, and option names appear in *Courier*.
- All substitutable or user supplied items(e.g., handles and argument values) appear in *Courier Italics*.
- All optional entries are delimited by question marks.

The description section explains the reasons and uses of the method/attribute with the following conventions:

- Literal strings (class command, method, attribute, and option names) appear in **bold Times**.
- Substitutable or user supplied items (e.g., argument values) appear in *boldItalics Times*.
- File and directory names appear in *italics Times*.

## Exception

Where feasible, each description will contain a section stating the conditions where the extension will throw an exception (fail).

## Examples

The examples use the following conventions:

- All examples appear in `Courier`
- The MYNAH System includes a program called **xmytclsh** (Section 4.10), that lets you interactively run Tcl commands, including all MYNAH extensions.

When you start the program, the **xmytclsh** prompt (`>`) appears.

The examples in this document have been created as if they were entered using **xmytclsh**, and follow the following conventions:

- Lines representing text you type begin with the **xmytclsh** prompt (`>`), e.g.,  

```
> xmyTermAsync connect
```
- Lines representing return values in examples will also appear in `Courier` but will not begin with the **xmytclsh** prompt, e.g.,

```
> xmyTermAsync connect
.xmyTermAsync_1
> set x 5
5
```

where the line beginning with **5** shows the return value for the *set* command.



## 1. Introduction

This document describes the MYNAH scripting language. This scripting language is based on the Tcl language. Using this language, you will be able to create scripts for executing tests for the various MYNAH packages.

**Tcl**, pronounced “tickle,” stands for “tool command language” and was developed by John Ousterhout at the University of California at Berkeley as a simple interpretive programming language, implemented as a library of C procedures.

The “flavor” of Tcl used by the MYNAH System is **extended Tcl**, also called **TclX**, under license from NeoSoft™. TclX is a superset of standard Tcl and is built alongside the standard Tcl sources, adding extensions to expand Tcl’s capabilities. TclX contains a

- Superset of new commands
- Library of user-extensible Tcl procedures.

[Section 4](#) provides a basic overview of the Tcl language. This section is not meant as an in-depth discussion of the language but as a general introduction. There are, however, several sources for a more complete understanding of Tcl. In addition, there are several Internet-based sources of Tcl information, including the USENET newsgroup *comp.lang.tcl* and several World Wide Web (WWW) home pages. [Table 1-1](#) lists a few of these pages; several of these pages also contain links to other pages on the Web. [Table 1-1](#) also provides the address for NeoSoft’s TclX man pages.

**Table 1-1.** WWW Tcl Home Pages


Home Page Name	Address
Tcl/Tk Project At Sun Microsystems Laboratories	<a href="http://sunscript.sun.com/">http://sunscript.sun.com/</a>
TCL WWW Info	<a href="http://www.sco.com/Technology/tcl/Tcl.html">http://www.sco.com/Technology/tcl/Tcl.html</a>
TclX (TCL) man pages (Neosoft)	<a href="http://www.neosoft.com/tclx/man/TclX.n.html">http://www.neosoft.com/tclx/man/TclX.n.html</a>

## 1.1 Using the TclX Help Facility

TclX provides a help facility, **tclhelp**. During installation, the MYNAH System places **tclhelp** in `$XMYDIR/contrib/tclhelp/bin`. To use this facility, type, at the UNIX prompt,


```
$XMYDIR/contrib/tclhelp/bin/tclhelp &
```

The window in [Figure 1-1](#) appears.

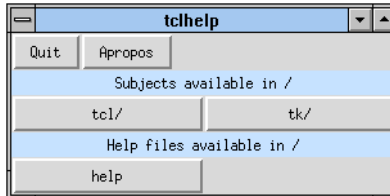

**Figure 1-1.** tclhelp Window

The help is organized in a tree structure with each subject button opening a different branch. For example, if you click on the **tcl/** button, the window in [Figure 1-2](#) appears. The subjects in this window are organized according to the various TclX extension categories listed on Neosoft's TclX page listed in [Table 1-1](#).

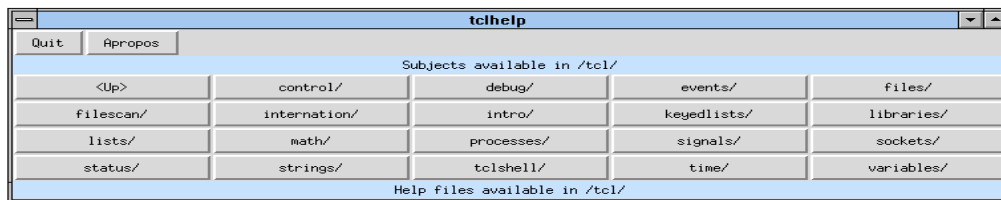

**Figure 1-2.** tclhelp Tcl Subjects Window

Click on the **Help** button in [Figure 1-1](#) for information on using the help facility.



## 1.2 MYNAH Extensions Overview

In addition to the standard set of Tcl commands and procedures, the MYNAH System makes use of the TclX extensions as well as sets of MYNAH specific extensions.

**Extensions** are commands and procedures that expand Tcl's capabilities. These extensions do not change basic Tcl, they only extend the abilities of the language.

The MYNAH extensions are organized into packages that are related to each other based on the functionality they perform. Each package represents a **domain**, which is the interface between the MYNAH System and the **System Under Test** (SUT). A SUT can be a system you wish to test or can contain the application you wish to automate. For example, the asynchronous terminal interface of an application is a **domain**.

### 1.2.1 Extension Types

There are three types of MYNAH extensions:

- **Class Commands** - These give you control over a class or category of functions. For more information about Class commands, see [Section 1.2.1.1](#).
- **Methods** - These let you perform actions on **instances**, which are connections made to SUTs using a class command. For more information about methods, see [Section 1.2.1.4](#).
- **Attributes** - These let you set the configuration characteristics of the instances and class commands. For more information about attributes, see [Section 1.2.1.5](#).

**Methods** and **attributes** are sub-commands to a **class** command, that is, they cannot be executed independently but rather must be executed in conjunction with a class command.

Table 1-2 contains basic examples of the relationships between class commands, methods, and attributes.

Table 1-2. Example Class Commands, Methods, and Attributes

Package	Class Command	Method	Attribute	Argument	Result
TermAsync	<b>xmyTermAsync</b>	<b>connect</b>			Creates an asynchronous connection.
TermAsync	<b>xmyTermAsync</b>		<b>-timeout</b>		Shows the default time-out value for the TermAsync package.
TermAsync	<b>xmyTermAsync</b>	<b>connect</b>	<b>-timeout</b>	<i>20</i>	Creates an asynchronous connection with a time-out value of 20 seconds.
General	<b>xmyExit</b>			<i>"exit script now"</i>	Exits from the current script.

Methods and attributes can be applied independently to class commands. For example, the **connect** method (Section 9.5.1.2) can be applied to the **xmyTermAsync** class command (Section 9.5) to create an asynchronous connection, e.g.,

```
xmyTermAsync connect
```

So too, the **-timeout** attribute (Section 9.5.2.18) can be applied to the **xmyTermAsync** class command to show the default time-out value for the TermAsync package, e.g.,

```
xmyTermAsync -timeout
```

You can use attributes with methods, such as applying the **connect** method and the **-timeout** attribute to the **xmyTermAsync** class command to create an asynchronous connection with a time-out value that is different from the default value, e.g., see the third example in Table 1-2.

```
xmyTermAsync connect -timeout 20
```

You can also apply an argument value directly to a class command. For example, you apply a string that will be produced when exiting from a script directly to the **xmyExit** class command (Section 7.2.7), e.g., see the fourth example in Table 1-2.

```
xmyExit "exit script now"
```

The following subsections contain complete explanations of class commands, methods, and attributes.

### 1.2.1.1 Class Commands

A **class** is a specific area or category of functionality. For example, each MYNAH domain is in essence a class. Thus, the 3270 emulation package (Term3270) is a class. The general MYNAH Package (Section 7) can also be considered as a class.

A **class command** gives you control over a MYNAH class. For example, the **xmyTerm3270** class command (Section 10.4) gives you control over functions of a 3270 emulation, such as creating a connection. At the same time, **xmyExit** is a general class command used to exit from a script and the Tcl interpreter. Regardless of which type of class command you use, the basic syntax for class commands and their arguments takes one of the following forms:

```
class_command_name method_name ?-attribute attribute_value?  
class_command_name -attribute attribute_value ?-attribute  
attribute_value?
```

**NOTE** — Arguments delimited by question marks are optional. See the preface for an explanation of the formatting conventions used in this guide.

The general class commands, those that apply to the entire MYNAH System, are detailed in Section 7. These commands are automatically available to all scripts when they start executing. Among the functions of these class commands are loading MYNAH Tcl extension packages, comparing two files, and changing values in the symbol table.

**NOTE** — The symbol table is a Tcl list of lists (each sublist containing a variable/value pair) that is passed to scripts at start-up and passed back to the execution user at script termination time. See Sections 7.2.18, 7.2.19, 7.2.20, and 7.2.21 for more information on setting up a symbol table.

The domain-specific class commands are a bit more specialized in that there is only one class command per domain. You use class commands to create and interact with connections to a SUT. In addition, you can also use class commands to set or return default attribute configurations for the entire domain.

Attributes are the characteristics, the pieces of information, of a class or a class's connection, such as the current cursor location or the start-up shell. For example, if you created a connection using the **xmyTerm3270** package (Section 9), such as by executing the following:

```
> set conn2 [xmyTerm3270 connect]  
.xmyTerm3270_1
```

you could execute the following command

```
> $conn2 -row  
21
```

to find the current row position of the cursor.

See [Section 1.2.1.5](#) for a further discussion on attributes.

One of the main functions of a domain's class command is to create a connection to a SUT. For each domain there is one sub-command (or, in our lexicon, a **method**), called **connect**, that is used by the class command to create a connection. A very basic example would be

```
xmyTerm3270 connect
```

where **xmyTerm3270** is the class command and **connect** is the method.

There is often more to creating a connection than simply typing the name of the class command **xmyTerm3270** and the **connect** method. For example, you may have to specify what you are connecting to. This will be covered in the discussion of each domain's **connect** method. For now, let's just use our basic example of using the **connect** method without any arguments.

### 1.2.1.2 Instances

When you use the **connect** method, the class command creates a unique connection to a SUT. We call this unique connection an **instance**. For example, every time you invoke **xmyTerm3270 connect**, you create a new instance.

### 1.2.1.3 Handles

For each instance, the MYNAH System returns a reference to the instance. This reference is called a **handle**. The automatically generated handle name takes the form

```
.class_command_NN
```

where the count number suffix NN is an iterated number assigned by the **Script Engine** (SE), which is the MYNAH process that runs code. For example, the first time you type:

```
> xmyTerm3270 connect
```

the returned handle would be **.xmyTerm3270\_1**, the second time it would be **.xmyTerm3270\_2**, and so on.

You use the handle to send or receive information from a SUT using the various methods and attributes. For example, the Term3270 Package, used to interact with the 3270 domain,

has a method called **type**, which is used to send keystrokes to a connection. To send the string "tst" to the first handle mentioned above, you would enter:

```
> xmyTerm3270_1 type -text "tst"
```

It is recommended that you assign a handle to a variable. Using the previous **type** method example, you could enter:

```
> set conn1 [xmyTerm3270 connect]
> $conn1 type -text "tst"
```

Without the variable, every time you want to use the handle, you would have to type **.xmyTerm3270\_1**. This could get a little tedious. In addition, **.xmyTerm3270\_1** may not have much meaning for you, but you could create a value whose name has a specific meaning, such as **\$conn3270** or **\$connAsync**. Since this is more concise, it will also help clean up your scripts.

Using variables will help shield your scripts from potential connection name changes. For example, if a connection name changes and you used a generated handle name, you would have to change your script, but if you use a variable, the handle will always be set to the variable you use regardless of the format of the system-generated handle name.

The general syntaxes of the handle-based methods and attributes are

```
handle method_name arguments
handle -attribute_name arguments
```

Methods and attributes are explained below.

#### 1.2.1.4 Methods

**Methods** are sub-commands to class commands. Generally, methods are used to perform actions on instances you create. The **type** method is a good example: it lets you send text to an instance of a 3270 terminal connection.

**NOTE** — Except for the case described below, do not use methods directly with class commands. For example,

```
xmyTerm3270 type -text "tso"
```

would be illegal. There is no way of knowing what particular connection you are trying to use **type** to enter this information for; there is no instance to correspond to the method.

We said that methods are generally used to perform particular actions on instances but there is one exception: the **connect** method. **connect** must be used directly with a class command to create an instance, such as

```
set conn1 [xmyTermAsync connect]
```

where the **connect** method is used with the **xmyTermAsync** class command to create a connection to a synchronous SUT.

### 1.2.1.5 Attributes

The term **attribute** has several meanings in the MYNAH System. At their most basic level, **attributes** are the individual values defining the characteristics, the pieces of information, of a class or a class's connection. For example, attributes can be the name of a host, the cursor's column or row position, the number of seconds the system will wait for a response (i.e., the time-out value).

At the same time, the sub-commands that let you manipulate attribute values are also called **attributes**. Syntactically, attributes can be distinguished from methods in that an attribute name is preceded by a hyphen, as in **-column**.

Attributes are commonly used to set attribute values for an instance or to display the values of those attributes. For example, an attribute of the **\$conn1** handle we created in [Section 1.2.1.4](#) is what 3270 terminal model the instance is running as. To display the model (assuming it's a model 2), type

```
> $conn1 -model  
2
```

to generate the return value, i.e., 2 for model 2.

Some attributes can only be set upon creation of the connection. Each domain has its own set of attributes that can only be set during connection creation, and this information will be found in each domain's section. Model would be an attribute that can only be set when creating a connection. Other attributes can be set at any time during the life of the instance. For example, the following statements use the **-timeout** attribute to reset the timeout value.

```
> $conn1 -timeout  
10  
> $conn1 -timeout 30  
> $conn1 -timeout  
30
```

We first apply the **-timeout** attribute to the **\$conn1** handle to see the current timeout value for this instance, which is 10 seconds. We want to change this value to 30 seconds, so we re-apply the **-timeout** attribute, this time adding the value 30 as an argument to the attribute. Lastly, we use the **-timeout** attribute a final time to see that the timeout value has been changed.

Since the **-timeout** attribute was applied to the **\$conn1** handle, this change in the timeout value affects this instance only.

Unlike methods, many attributes can also be used directly with class commands to return or set default attribute values. For example, we first use **xmyTerm3270 -timeout** to return the current time-out value for the 3270 domain, such as

```
> xmyTerm3270 -timeout  
10
```

We can use the same class command/attribute combination with an argument to change the default time-out value.

```
> xmyTerm3270 -timeout 25  
> xmyTerm3270 -timeout  
25
```

All new invocations of **xmyTerm3270 connect** will assume the new default value of 25 seconds.

To summarize, the differences between using attributes with class commands and connection instances are

- When an attribute is used with a class command, the attribute is set for *all* instances in that class, for example, this sets the timeout value for all future Term3270 instances in a script.

```
> xmyTerm3270 -timeout 25
```

- When an attribute is used with a handle, the attribute is set for just that instance, for example, this sets the timeout value for only this instance of a Term3270 connection.

```
> $conn1 -timeout 30
```

## 1.2.2 Extension Functional Categories

The MYNAH Tcl extensions can be organized into six functional categories, as shown in [Table 1-3](#). In the sections describing the MYNAH Package extensions, the methods and attributes are listed alphabetically. At the beginning of each section is a table listing the extensions, organizing them by category.

**Table 1-3.** MYNAH Tcl Extension Functional Categories

<b>Category Name</b>	<b>Description</b>
<b>Connection</b>	These extensions deal with establishing or destroying a connection or obtaining information about a connection. For example, obtaining a list of open connections, the name of the host, and the connection's status.
<b>Data Entry/Retrieval</b>	These extensions deal with sending or retrieving data from the SUT. You can also obtain information about the data, including screen names and the name of the last pressed function key.
<b>Location</b>	These extensions let you move the cursor or find the location of a screen element.
<b>Comparisons</b>	These extensions let you compare test data with data returned by a SUT.
<b>Waiting</b>	These extensions give you control over script execution suspension until the SUT has returned with the proper response.
<b>Attributes</b>	In addition to being the individual values defining the characteristics and the sub-commands used to manipulate these values, attributes can also be a category of methods and attributes that are used to find information about the SUT's configuration characteristics, e.g., blinking, highlighted.



## 2. General Scripting

This section discusses the basic concepts behind scripting, these include the following functionality:

- Creation - Describes the various methods of creating scripts
- Execution - Describes the various methods of executing scripts
- SE States at Start Time - Describes start-up modes
- File Output - Describes the various files that are created when a script is executed
- Database Output - Describes the database objects that are created when a script is executed
- Execution Without Database Update - Describes the steps used to execute a script without updating the database
- Loading Procedures - Involves invoking script commands.

**NOTE** — See the *MYNAH System Users Guide*, for detailed information on using the **Script Object**, **Script Builder**, **Graphical User Interface (GUI)** and the **Command Line User Interface (CLUI)** user commands.

### 2.1 Overview

You may create script code in the MYNAH System to accomplish either of the following:

- Automation of a **test**.
- Automation of a **task**.

This section summarizes how you create and execute scripts.

The remaining sub-sections describe in detail script creation, execution, and execution output.

#### 2.1.1 Creation

Script code is stored in UNIX<sup>®</sup> files. You can create this code by

- Using your favorite editor
- Using the MYNAH **Script Object** (code view) window
- Using the MYNAH interactive **Script Builder**.

Script Objects in the MYNAH System database are used to document script code. One of the required attributes of a Script Object is the location of the script code. In other words, a Script Object is an object in the MYNAH database that points to a particular file in the UNIX file system.

Another optional attribute of a Script Object is an association with one or more Test Objects. This attribute is used when the code accomplishes the automation of a Test.

A Script Object is only needed if you want to use the MYNAH database to keep track of your scripts or if you want to track automated testing using a Script Object's database functions.

To make use of all of these database features, one possible scenario might be

1. Create a Script Object and select a filename.
2. Create some code and save the code to the filename.
3. Associate the Script with a Test (or possibly other MYNAH objects).

[Section 2.2](#) describes in detail how to create script code.

### 2.1.2 Execution

You have several methods from which to choose for executing scripts. You can run scripts:

- Interactively from the UNIX command line (using **xmytclsh**)
- Interactively in the MYNAH GUI (using the Script Builder)
- Un-attended in the Background Execution Environment (using the GUI or CLUI).

Each execution of a script can produce a directory containing a record of the execution. In addition, if a script is described in a Script Object, then each execution may produce a database object called a Runtime Object and, for each Test Object associated with a Script Object, a Result Object.

[Section 2.3](#) describes in detail how to execute script code.

## 2.2 Creating Scripts

The MYNAH System provides several means for creating scripts. You can:

- Use your favorite editor (e.g, **vi**)
- Use a MYNAH Script Object (code view)
- Use the interactive MYNAH GUI Script Builder.

**NOTE** — Both the Script Object and the Script Builder methods let you enter code using an external editor. The MYNAH System will use whatever editor you specify in your preferences. If you do not specify an editor, the system will default to **vi**.

You may choose one method over the others or use a combination of methods.

Once you've created a script, you can execute it using any of the methods described in [Section 2.3](#).

**NOTE** — For hints about what to put in your scripts, see [Section 3](#).

### 2.2.1 Using an Editor to Create Code

One way to create a script is to use your favorite editor. Simply type the Tcl commands and MYNAH extensions detailed in this guide and save them to a UNIX file. This method is recommended only for experienced users since it requires extensive knowledge of the system.

One of the primary reasons for using an editor is to edit an existing script. For example, you can use an existing script as the template for another, copying and modifying the script rather than creating an entirely new script.

Once you've created the script, you can then execute the script using any of the execution methods.


## 2.2.2 Using the Script Object Code View to Create Code

**NOTE** — See the *MYNAH System Users Guide* for detailed information on using Script Objects.

Another method for creating script code is using the MYNAH GUI **Script Object**. Using a Script Object, you can

- Type code directly in the Script Object Code View window
- Insert any of the templates that are delivered with the MYNAH System or that you create
- Load any script you previously created
- Have the GUI invoke your favorite editor and type in the script
- Use any combination of the above.

However you decide to create script code, script code will appear in the Script Object Code View as it does in [Figure 2-1](#).

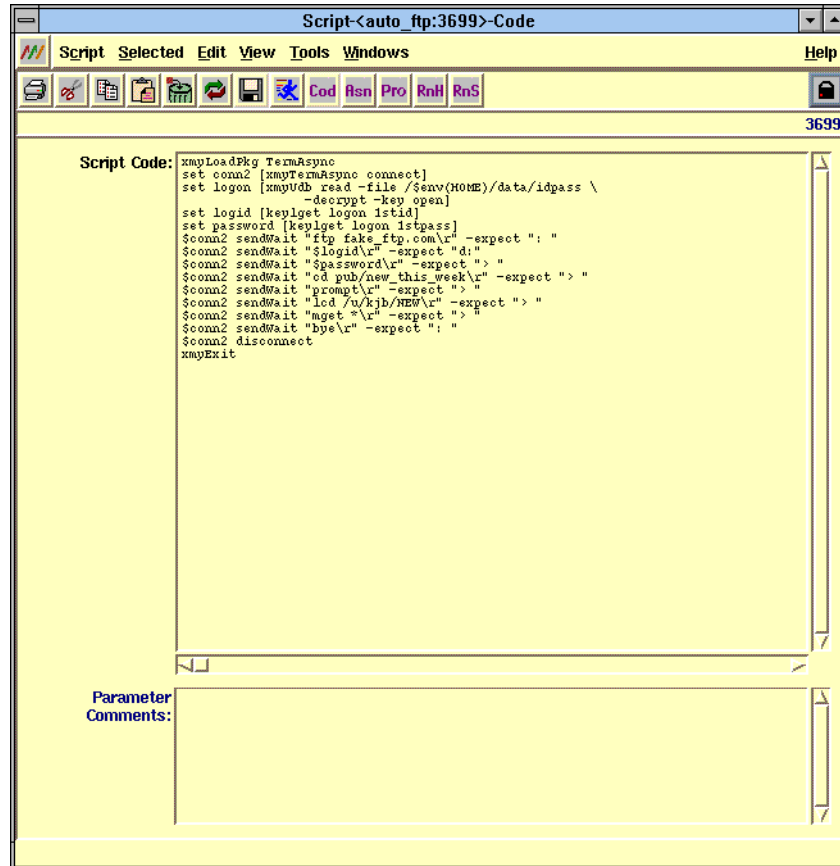

**Figure 2-1.** MYNAH GUI Script Object Code View

When you create a Script Object, you specify the path and name of a script file in the UNIX file system. If the UNIX file exists, the MYNAH System loads the file into the Script Object's code view. If the UNIX file doesn't exist, the code view will be empty.

When you save a script using the Script Object, an element, called an object, is created in the MYNAH database that points to the script file. In addition, a file is created in the UNIX file system, or, if one already exists, will be overwritten if you choose to do so.

You can execute the script directly from the Script Object (if you save the script) or by using one of the other execution methods.

### 2.2.3 Using the Script Builder to Create Code

**NOTE** — See the *MYNAH System Users Guide* for detailed information on using the Script Builder.

The GUI's **Script Builder** is useful when you need to record keystrokes from a 3270 or asynchronous session and/or add Tcl statements for other types of SUT connections, procedures, etc. In fact, this is the recommended method of creating and debugging scripts since it can minimize the guesswork you have over what Tcl commands or extensions to use or the correct syntax when you use it to emulate and record a connection to a SUT.

The Script Builder can be accessed in one of two ways:

- If you want to be connected to the MYNAH database, use the **Tools** menu on any MYNAH window
- If you do not want to be connected to the MYNAH database, start a standalone Script Builder.

When creating script code using the Script Builder, you can have the Script Builder emulate a 3270 or asynchronous connection to access a SUT. You can then perform all of the actions you want to use to automate or test the SUT. The Script Builder can be set to capture all of your keystrokes. When you do this, the Script Builder automatically enters the MYNAH Tcl extensions with the correct syntax. If the statements completely represent what you want, then you do not need to modify the script. However, the Script Builder generates default statements. Therefore, you might want to modify the default statements, such as if you need to specify a different time-out for a specific connection.

- Insert any of the templates that are delivered with the MYNAH System or that you have created
- Insert existing script code
- Insert script code from a MYNAH Script Object. This loads the file to which the database object points

**NOTE** — Note this method is available only if you are not using a standalone script builder.

- Have the GUI invoke your favorite editor and type in the script
- Enter or edit the code directly in the Code view window
- Any combination of the above.

However you decide to create script code, script code appears in the Script Builder Code View as it does in Figure 2-2.

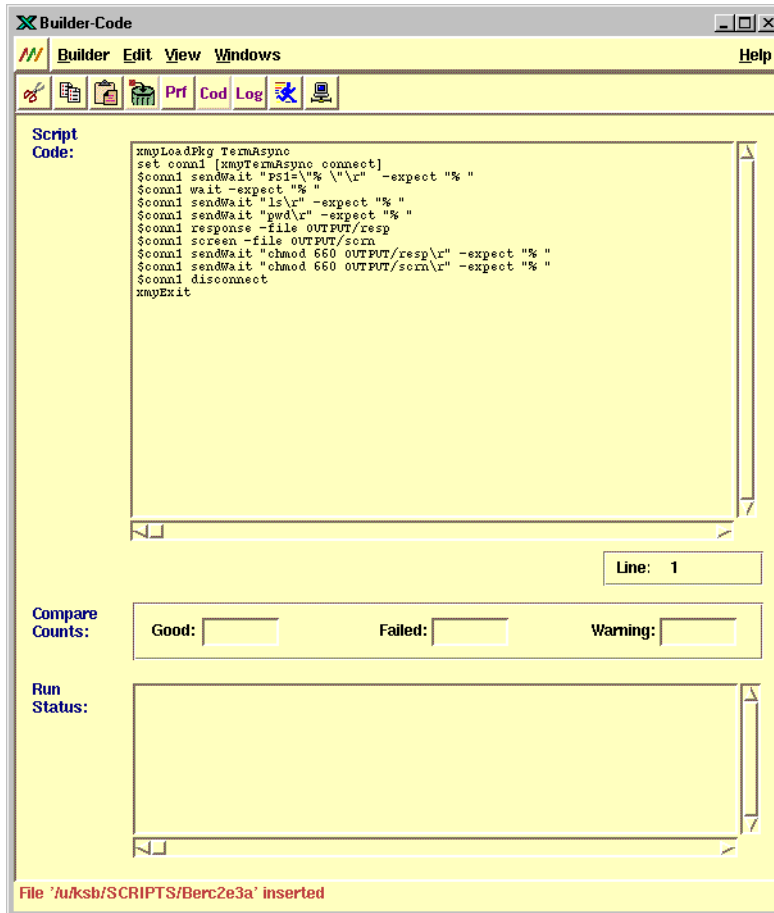


Figure 2-2. MYNAH Script Builder Code View

Until you save the code in a script, you can execute the code from the Script Builder's **Run** dialog only. If you save the code to a script, you can use any of the other execution methods.

## 2.3 Executing Scripts

There are several methods for executing scripts. Depending on how you use the MYNAH System, some methods may be more advantageous than others. The following sections describe these methods, detailing the steps for each method, and why you should or shouldn't use that method.

**WARNING** — How you execute a script impacts various factors, such as UNIX environment variables and ownership of any output files. Section 3.3 discusses these issues and details a few methods of dealing with them.

When a script terminates, several things happen:

- Information is written to the appropriate output files. For more information, see [Section 2.5](#).
- Appropriate database objects are updated (if the script was executed in database mode). For more information, see [Section 2.6](#).

### 2.3.1 Using the Script Builder to Execute Code

Once you've used the Script Builder to load or create code, all you have to do to execute the code is execute

**Script Builder->Run**

or click on the **Run** button on the Script Builder Tool Bar.

**NOTE** — For more information about the Script Builder see the *MYNAH System Users Guide*.

The Script Builder provides one method for executing script code. However, since the Script Builder does not create the MYNAH System's Test Management output objects (Runtime and Result objects), you should choose the Script Builder when you do not need the Test Management capability. (For more information, see [Section 2.6](#).)

You might choose to use the Script Builder, for example, to re-run your newly created code (e.g. to verify that the code runs from beginning to end), or you might want to run existing code to investigate a "System Under Test" (SUT) problem.



When you use the Script Builder to execute code, there is an option called **Show Execution Progress**. If you select this option, as each line of code is executed, the code (and its Tcl return value) will appear in the dialog window shown in Figure 2-3.

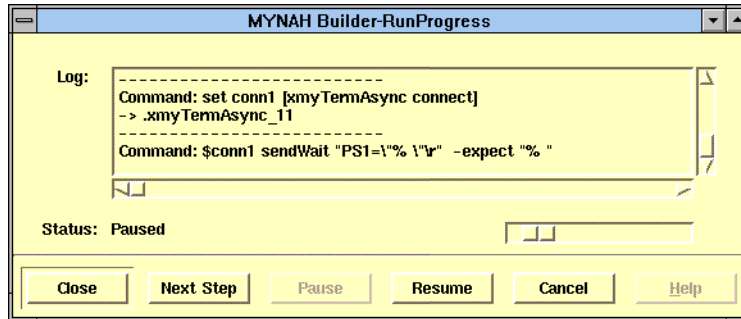


Figure 2-3. Script Builder Execution Progress Dialog

The Script Builder also has an option called **Display Remote Session Connections**. If you select this option and the script code requires a connection, the Script Builder will start a window emulating an asynchronous or 3270 synchronous window, such as the one in Figure 2-4. When a line of code is executed that sends a string to the system you are testing or automating, the string (and its response) will appear in the emulation window.

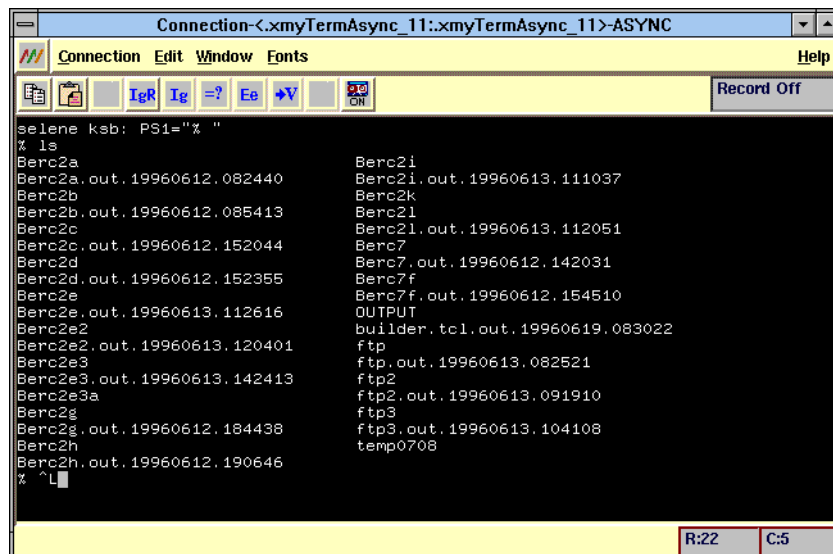


Figure 2-4. Script Builder Remote Connection Execution Window

You can have the system run the script automatically or you can have the system run the script step-by-step, pausing after each line of the script has been sent. This is very useful when debugging a script since you will be able to tell exactly where a problem occurred.

**NOTE** — The Script Builder uses a type of **Script Engine (SE)** called an **embedded SE**. An SE is the MYNAH process that runs code, and an embedded SE is an SE that runs code by graphically displaying the screens associated with Term3270 and TermAsync Packages.

## 2.3.2 Using Background Execution

The MYNAH System lets you execute scripts as background processes. That is, you can submit the script to the MYNAH System, which will schedule the script for execution. You can continue with other work while the script is running. Background execution also allows you to use the MYNAH System's Test Management capability.

We will first explain the concepts of background execution and then describe the steps used to execute scripts as background processes.

**NOTE** — Background execution uses a type of SE called a **background SE**.

### 2.3.2.1 Background Execution Overview


There are two primary background processes in the MYNAH System, the Script Dispatcher (SD) and the Script Engine (SE).

A **Script Dispatcher** manages Script Engines. An SD's primary function is to "dispatch" script execution requests to an SE. Part of the dispatching job is to manage **concurrency** of script execution, which is the ability to synchronize between concurrently executing scripts. All script requests that come to a SD process are managed as part of one concurrency group. There can be more than one SD in a MYNAH configuration.

A **Script Engine** process runs scripts. An SE must be running as part of an **SE Group** under the control of an SD. The managed SEs are organized into SE Groups.

The combination of SDs and SE Groups constitutes the MYNAH **Background Execution Environment (BEE)**. The relationship between SDs and SE Groups is

depicted in Figure 2-5, which shows two SDs. Each SD dispatches scripts to multiple SE Groups. Each SE Group in turn consists of some number of SEs.

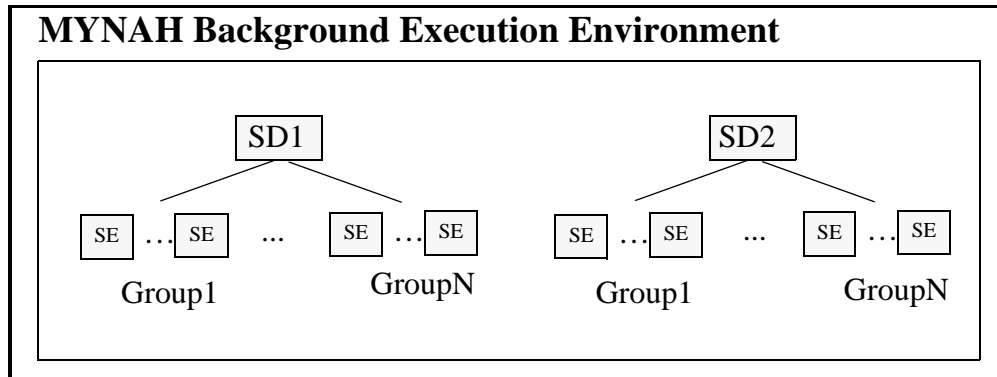

**Figure 2-5.** Background Script Execution Environment

A simple BEE is composed of one SD and a single SE Group.

You can use even this simple BEE to execute scripts in the background. This will provide you unattended execution and concurrency control.

The MYNAH System is delivered with a simple BEE already configured and ready to use. For the remainder of this section, we will assume you're using a BEE that includes one SD with one SE group and three SEs..

For a complete discussion on the power, extensibility, and flexibility of the BEE, see the *MYNAH System Administration Guide* and the *MYNAH System Users Guide*.

### 2.3.2.2 How to Submit Scripts to the Background

You can submit scripts to the background from either the command line or the GUI. For more information, see the *MYNAH System Users Guide*.

#### 2.3.2.2.1 From the CLUI

You submit scripts to the BEE from the command-line by using the Command Line User Interface (CLUI) command **xmyCmd** and its sub-command **submit**. For example, if you have a script and a Script Object called *auto\_ftp*, which you use to automate the retrieval of files from an anonymous **ftp** archive, you can execute it by typing

```
xmyCmd submit auto_ftp
```

**NOTE** — See Section 17 of the *MYNAH System Users Guide* for information on using the **submit** sub-command.

The CLUI looks in the database to find the Script Object that is associated with your file (*auto\_ftp*) and then sends a request to the BEE to execute the script associated with the Script Object. If there is no Script Object associated with your file, the CLUI returns the message

```
xmyCmd(submit): Error cannot retrieve script
"<path>/auto_ftp" from database
```

If your script is not associated with a Script Object, you can execute the script using **-c** option, as in

```
xmyCmd submit -c auto_ftp
```

The **-c** option runs the script in the “cloaked” mode, meaning that no MYNAH database transactions are performed. The CLUI sends the name of your file (*auto\_ftp*) to the BEE for execution but does not interact with the MYNAH database, for more information see [Section 2.6](#).

#### 2.3.2.2.2 From the GUI

To submit a script to the background from the GUI, you can use one of the database objects (e.g., script, test, sut). Simply choose the **Run** option and the selected Script(s) associated with the test will be sent to the BEE.

#### 2.3.2.3 Background Execution and the Database

Database updates are always performed if a script is submitted from the GUI or the CLUI when the **-c** option is not specified. The **Job Status** window is your tool to monitor the scripts you have submitted to the BEE when a Script Object is associated with each submitted script.

### 2.3.3 Using xmytclsh

The MYNAH System provides a utility program, **xmytclsh** (Section 4.10), that lets you interactively run Tcl commands, including all MYNAH extensions.

The main reason to use **xmytclsh** is as a tutorial tool. While you’re learning the MYNAH scripting language, you can use **xmytclsh** to test the MYNAH commands and extensions. However, you can also use **xmytclsh** to execute existing script code.

This method, however, is not a very useful way of executing a script since it does not generate any of the MYNAH output files nor does it take advantage of MYNAH Test Management capabilities.

You could also type each line of the script directly into **xmytclsh**, but this is very tedious, and once you've finished you don't have a reusable script.

To use **xmytclsh** to execute script code

1. Create the script, and save it to a file.
2. Start **xmytclsh**.
3. Use the **source** command (Section 4.11) to load the script.

**NOTE — xmytclsh** uses a type of SE called a **command-line SE**.

For example, if you have a script in a file called *logon*, you could execute it by typing the following:

```
xmytclsh  
>source logon
```

assuming you are in the current directory containing the file *logon*.

### 2.3.4 Maximum number of Connections (concurrency)

You can run a maximum of twenty-four (24) TOPCOM, Asynchronous, and 3270 scripts at a time. If you exceed this level, the following will occur:

- While using a standalone engine (i.e., via the Script Builder), your scripts will hang
- While using a background engine, your scripts will fail and you will receive an error message similar to the following:

```
Status = 1(XMY_ERROR)  
  
SD(SD1): yuen.5: SE(0000SD1): {result {xmyTop connect: timed  
out waiting for connection ack}} {goodCompares 0}  
{failedCompares 0} {warningCompares 0}  
  
call susanna yuen for details
```

## 2.4 SE States at Start Time

When an SE starts up, it runs in one of three modes: *Stateless*, *ConnOnly*, and *FullState*. The mode cannot be changed after start-up. The following section will describe SE execution modes.

### 2.4.1 Stateless Mode

In the *Stateless* mode, when a script completes

- All open connections are closed
- All Tcl file descriptors are closed
- The Tcl interpreter is deleted.

The Tcl start-up script is rerun each time a new interpreter is created. This means that any packages loaded with **xmyLoadPkg**, (for more information See [Section 7.2.9](#)) are reloaded.

You would use the *Stateless* mode when you do not want to maintain connections between scripts. For example, if you are submitting a series of scripts to different SUTs, you would include statements to log on and log off from the appropriate SUT in each script.

### 2.4.2 ConnOnly Mode

In the *ConnOnly* mode, when a script completes

- Connections to the SUT are maintained
- All Tcl file descriptors are closed
- The Tcl interpreter is deleted.

You would use the *ConnOnly* mode when you want to maintain connections between scripts. For example, if you are submitting a series of scripts to the same SUT, you would include a statement to log on to the SUT in the first script only, include a statement to log off from the SUT in the last script only, and all scripts in between would assume that you are still logged on to the SUT.

### 2.4.3 FullState Mode

In the FullState Mode, when a script completes;

- Connections to the SUT are not maintained
- All Tcl file descriptors are not closed
- The Tcl interpreter is not deleted.

In the *FullState* mode, scripts submitted to an SE Group go to the first available engine in that group. No re-initialization is performed between each script execution.

When users submit scripts to an SE group running, they should ensure that the Tcl interpreter in each SE is in the same state (e.g., same variables defined, etc.) otherwise scripts submitted to such a group could behave differently depending on which SE they run in.

**NOTE** — Command-line SEs (i.e., those submitted using **xmytclsh**) are always in *FullState* mode, regardless of the *xmyConfig* file setting, since they run individual script lines, not entire scripts.

You would use the *FullState* mode when you are submitting individual scripts. Depending on your implementation of the MYNAH System and needs, each script would include statements to log on and log off from the appropriate SUT.

**NOTE** — Symbol tables are *not* retained by SEs, even those running in *FullState* mode. Each time a script is executed, a new (possibly empty) symbol table is created containing the symbols passed to the engine in that execution request.

## 2.5 File Output

Whenever a script is executed, the SE may produce files in an output directory. Whether or not files are produced and how much output is produced are controlled by the **OutputLevel** entry. Users can control the amount of output that is produced from within a script using the **xmyVar(OutputLevel)** array variable [Section 6.13](#). This variable is initially set by the **OutputLevel** parameter of the **Engine** entry in the *xmyConfig* file.

There are several types of output files: *output*, *SUTimage*, *compares*, *stdout*, and *stderr*. These types of output files are described below.

### 2.5.1 Determining How Many Output Directories to Retain

The number of output directories to retain is configured by the MYNAH Administrator in the *xmyConfig* file.

- If the MYNAH System has been configured so that zero backups be kept, any existing directories for the current script are removed before a new one is created.
- If a finite number of backups are being kept, then when the finite number of backups is reached the oldest output directory is removed after the current run completes.
- If unlimited backups has been requested, no removal takes place.

If an SE finds a directory with the same name and timestamp as the one it is trying to create, the SE sleeps a second, regenerates the directory name, and tries again, so as not to overwrite another SE's active output directory.

Subsequent runs increment the number of output directories unless the SE is configured to keep only one copy of each script's output.

### 2.5.2 Location of the Output Files

By default, the MYNAH System will generate output files in the directory containing the script. The output files are contained in a subdirectory with the same name as the script plus the suffix "out" and a timestamp.

For example, if the current date and time is September 1, 1996, 4:28:24 PM, the output directory for the current run of the script */home/scripts/script1.tcl* is */home/scripts/script1.tcl.out.19960901.162824*.

**NOTE** — You must open the UNIX permissions of the directory containing the script or the system will not be able to generate the output subdirectory. For example, set the permissions to *775*.



### 2.5.2.1 Other Possible Locations

The default location of the script output directory can be overridden by the MYNAH Administrator setting either the **OutputRoot** or **OutputPath** entry in the *xmyConfig* file in the **Engine** section.

**OutputPath** specifies the script output directories. The hierarchy of the original scripts is not maintained; this is a flat directory. For example if **OutputPath** is set to */MYNAH/data* and an execution request for the script */HOME/scripts/script1.tcl* is received, then the script output directory will be

```
/MYNAH/data/script1.tcl.out.<timestamp>
```

**OutputRoot** specifies the path for the root file system under which script output directories should be created. Script output directories are created using the same directory hierarchy as the original scripts. For example, if **OutputRoot** is set to */MYNAH/data/outputs* and an execution request for the script */home/scripts/script1.tcl* is received, the script output directory will be

```
/MYNAH/data/outputs/home/scripts/script1.tcl.out.<timestamp>.
```

### 2.5.2.2 Output Directory Symbolic Link

The MYNAH System creates a symbolic link that points to the output directory created by the latest script execution. The name of the symbolic link will be *<scriptname>.out*. Using this link you can analyze the results using your home grown scripts without needing to change the output directory name for each run.

**NOTE** — Some UNIX commands do not behave the same way on symbolic links as they do on actual directories, such as in following example:

```
broccoli> ls -l xyz.tcl.out
lrwxrwxrwx  1 madmin mynah    29 Feb 22 13:06 xyz.tcl.out
->./xyz.tcl.out.19980222.130535/

broccoli> ls -l xyz.tcl.out.19980222.130535
total 8
-rw-r--r--  1 madmin mynah    2020 Feb 22 13:06 output
```

### 2.5.3 Content of the Output Directory

A script output directory for a single script execution may consist of several files.

**NOTE** — These files are created during execution, but if a file is empty after the execution has completed, the file is deleted. Thus, you may temporarily see these empty files in your directory.

The <i>CmpMstr</i> file	This file contains the actual values encountered during a comparison, provided you use the Compare Master feature.  See <a href="#">Section 5</a> for information on using the Compare Master.
<i>SUTimage.&lt;conn&gt;</i> files	These files contain SUT input and output, where <i>&lt;conn&gt;</i> is the connection handle, e.g., <i>SUTimage.xmyTermAsync_1</i> . This output can be in the form of screens or messages. There may be one or more files, and these files are created only if a SUT is accessed. If SUTimage events are not written to the <i>output</i> file, then output to the <i>SUTimage</i> files is also not logged.
The <i>compares</i> file	This file contains the differenced output for any compare commands, that is, if your script compares one event against one or more events, the expected and received output are written to this file. If compare events are not being written to the <i>output</i> file, then output to the <i>compares</i> file is also not logged.
The <i>output</i> file	This file contains events as defined in <a href="#">Section 2.5.6</a> . It is the highest level view of a script execution.
The <i>result</i> file	This file contains the script output presented in a user-readable format, provided you use the user-readable option when submitting the script. For more information, see the <b>xmyCmd mergeOutput</b> description in <a href="#">Section 17.2.11</a> of the <i>MYNAH System Users Guide</i> .
The <i>stdout</i> and <i>stderr</i> files	These files contain anything that is coded to write to the standard output or error.

For example, after executing (with the user-readable option) the script *abc.tcl*, you may see the following files and directory (assuming your Output Level included *sutimage*, *compare*, *stderr*, and *stdout* and your script contained compares using the Compare Master feature, access to a 3270 SUT, and commands to write to *stderr* and *stdout*):

- In the script directory you would see

```
abc.tcl
abc.tcl.out
abc.tcl.out.19960612.082440/
```

- Then in the output directory *abc.tcl.out* you would find

```
SUTimage..xmy3270_1
CmpMstr
compare
output
result
stderr
stdout
```

## 2.5.4 SUTimage files

The Term3270, TermAsync, and App-to-App Packages produce one or more *SUTimage* files, which contain images of all strings, commands, etc., your script sends to a SUT and the SUT's responses. This output can be in the form of screens or messages. For example, the *SUTimage* file will contain an image of the asynchronous or synchronous (3270) screen as it appears after each send and receive.

A *SUTimage* filename takes the form *SUTimage<conn>*, where *<conn>* is the connection handle, e.g., *SUTimage..xmyTermAsync\_1*.

One *SUTimage* file is generated for each connection.

Each *SUTimage* entry takes the form

```
IMAGE HEADER - <type> (index:<index_number>)  
Body  
IMAGE FOOTER -
```

where

- *<type>* is one of ***String Sent***, ***Response***, or ***Screen***. These are equivalent to the output file sutimage events *<type>* entries *snd*, *rcv*, and *state*, respectively.
- *<index>* is a pointer to the start location of the sutimage. This is the same index number as the output file sutimage events *<index>* entry.
- ***Body*** is the string sent to or received from the SUT or the contents of the current screen.

The following are examples of the types of *SUTImage* file entries that the TermAsync Package produces:

```
IMAGE HEADER - String Sent (index:0)
PS1="% ^M
IMAGE FOOTER -
```

```
IMAGE HEADER - Response (index:123)
PS1="% ^M
$ %
IMAGE FOOTER -
```

```
IMAGE HEADER - Screen (index:2636)
PS1="% "
$ % ls
Debug_ksb                mytrace2
debug_s10                 mytrace2b
ioctelnet.log            templ
mytrace
xmyDiff.tcl.out.19960506.143429
%
```

```
IMAGE FOOTER -
```

The following is an example of the types of *SUTImage* file entries that the Term3270 Package produces:

```
IMAGE HEADER - Screen (index:4003)
  AUTHORIZED USE ONLY   -   IFS STU08
```

```
DATE:  05/31/96      TIME: 13:21:53
```

```
NODE NAME: TCP10081
```

```
USERID:
```

```
PASSWORD:
```

```
USER DESCRIPTOR:
```

```
GROUP NAME:
```

```
NEW PASSWORD:
```

```
OUTPUT SECURITY AVAILABLE
```

```
IMAGE FOOTER - Screen
```

## 2.5.5 compares File

The *compares* file contains the differenced output for any of the **compare** commands listed in [Section 2.5.6.2](#).

Each of these commands will also produce **compares** blocks in the *compares* file.

Each *compares* entry takes the form

```
COMPARE HEADER - <conn> compare (index:<index_number>)  
Body  
result: <result>  
COMPARE FOOTER - <conn> compare
```

where

- **<conn>** is the connection handle, e.g., *xmyTermAsync\_11*, if any.
- **<index\_number>** is the number of characters into the *compare* file where the compare begins. This is the same index for the *output* file Compare events.
- **Body**
  - Contains any expression you entered as an argument to **xmyCompare** (Section [7.2.3](#)).
  - Lists, in alternating rows, the expect and receive responses from domain instances. This only occurs if the compare failed.
- **<result>** specifies if the **compare** failed, succeeded, or warned of a potential failure. This can be one of the following:
  - 1 (good)
  - 0 (failed)
  - 0 (warning)

The following are examples of each type of *compares* file entries:

This comparison was successful, so the system did not generate expected or received statements.

```
COMPARE HEADER - .xmyTermAsync_11 compare (index:0)
result: 1 (good)
COMPARE FOOTER - .xmyTermAsync_11 compare
```

This comparison failed, so the system generated expected or received statements.

```
COMPARE HEADER - .xmyTermAsync_11 compare (index:112)
1:expected:<1999>
1:received:<1996>
result: 0 (failed)
COMPARE FOOTER - .xmyTermAsync_11 compare
```

This comparison, the result of an unevaluated expression, generated a warning.

**NOTE** — When a comparison is generated as the result of an evaluated or unevaluated expression, the same information, with the exception of the result of the comparison, is generated whether the comparison was good, failed, or warning.

```
COMPARE HEADER - xmyCompare (index:224)
expr: $childvar3 == "333"
result: 0 (warning)
COMPARE FOOTER - xmyCompare
```



## 2.5.6 The Output File

The *output* file contains script output information formatted using well-defined, colon separated fields. The categories of script output are

- child script (childscr) events
- compare events
- error events
- language trace events
- script events
- summary events
- sutimage events
- suttiming events
- test object (testobj) events
- user events.

The first five fields of every event line contain the following information:

```
<date>:<time>:<category>:<pkg>:<type>
```

where

- *<date>* and *<time>* are date and timestamp with format *YYYYMMDD:HHMMSS*
- *<category>* is one of the listed categories (e.g., *sutimage*)
- *<pkg>* is the MYNAH package producing the message (e.g., *TermAsync*)
- *<type>* is the type of message, which differs for each category of output.

The following subsections describe the format of each category of output.

**NOTE** — See [Section 3.4](#) for information on setting Output Levels.

### 2.5.6.1 Child Script Events

Child script (childscr) events are logged when connecting to a remote SE and when any requests or replies related to child script execution occur.

Each childscr event line takes the form

```
<date>:<time>:childscr:<pkg>:<type>:<conn>:<msgId>:<script name>:<status>:<exit string>
```

where

- *<pkg>* is *general*
- *<type>* is one of *send*, *receive*, *pause*, *resume*, or *cancel*
- *<conn>* is the name of the SE Group to receive the request
- *<msgId>* (*pause*, *resume*, *cancel*, *destroy*, *wait* only) is the message object id
- *<script name>* is the name of the script to be executed remotely
- *<status>* is the result of the operation
- *<exit string>* (*receive* only) is the Tcl result of script execution. (This string will be truncated if it exceeds the allowable length for output file lines)

The **sendWait** command (Section 8.2.6) creates two log messages:

- *send*, which lists the child script that was sent and whether the **send** succeeded
- *receive*, which lists the actual response.

#### Examples

```
19960529:190912:childscr:general:send:SeGp2::/u/kjd/child01.tcl:channel send succeeded  
19960529:190914:childscr:general:receive:SeGp2::/u/kjd/child01.tcl:TCL_OK:
```

### 2.5.6.2 Compare Events

Compare events detail the differenced output for any MYNAH language **compare** commands that automatically update the **xmyVar (GoodCompares)**, **xmyVar(FailedCompares)** and **xmyVar(WarningCompares)** counts. These are

- General package
  - **xmyCompare**
  - **xmyDiff**
  - **xmyRegex**
- TermAsync package
  - **\$connection compare**
- Term3270 Package
  - **\$connection compare**
- App-to-App Package (xmyFCIF)
  - **\$handle compar**
  - **\$handle compareTags**
  - **\$handle extraTags**

Each compare event line takes the form

```
<date>:<time>:compare:<pkg>:<type>:<label>:<result>:<index>
```

where

- *<pkg>* is one of *General*, *TermAsync*, *Term3270*, or *FCIF*
- *<type>* is one of *data*, *fcif*, *diff*, *screenRegion*, *regex*, or *string*
- *<label>* is non-null if the compare specified a label
- *<result>* indicates whether the test passed or failed by specifying one of *good*, *failed*, or *warning*
- *<index>* indicates the number of bytes into the *compares* file to look for the record of that **compare**. The numbers are indexes into the *compares* file in the output directory.

#### Example

```
19951201:090000:compare:3270:screenRegion::good:226
```

The MYNAH comparison commands log compare events to the *output* file and also write expected and actual data, if possible, to the *compares* file. (If an expression is being evaluated instead of data being compared, the expression is written to the *compares* file.)

### 2.5.6.3 Exception (error) Events

The SE logs an exception event when an exception occurs in the Tcl interpreter. An exception event contain the value of *errorCode* and *errorInfo* as set by the interpreter and take the form

```
<date>:<time>:error:<pkg>::<message>
```

where

- *<pkg>* is *errorCode* or *errorInfo*
- *<message>* is the error message itself.

#### Example

```
19960613:112054:error::errorInfo:Connection went down
19960613:112054:error::errorInfo: while executing
19960613:112054:error::errorInfo:"$conn1 wait -expect "$ "
19960613:112054:error::errorInfo: (file "/u/kjd/ex.tcl" line 4)script: /u/kjd/ex.tcl line: 4
19960613:112054:error::errorCode:NONE
```

### 2.5.6.4 Language Events

Language events record the lines of your scripts, with the format

```
<date>:<time>:lang:<pkg>:command:<command>
```

where

- *<pkg>* is the language package that is used
- *<command>* is the Tcl command itself. Variables with unprintable characters or lines longer than 512 characters are truncated.

#### Examples

```
19960613:142414:lang:tcl:command:xmyLoadPkg TermAsync
19960613:142414:lang:tcl:command:set xmyVar(OutputLevel) {sutimage, lang, script}
19960613:142414:lang:tcl:command:xmyTermAsync connect
19960613:142414:lang:tcl:command:set conn1 [xmyTermAsync connect]
19960613:142414:lang:tcl:command:$conn1 sendWait "PS1=\"% \r" -expect "% "
19960613:142415:lang:tcl:command:$conn1 wait -expect "% "
19960613:142415:lang:tcl:command:$conn1 sendWait "ls\r" -expect "% "
19960613:142415:lang:tcl:command:$conn1 sendWait "pwd\r" -expect "% "
```

**NOTE** — No language events are recorded for the commands in MYNAH procedures, even if *language* events are turned on in the Output Level.

### 2.5.6.5 Script Events

Script events record high level script activity, e.g., when the script began execution. Script events have the format

```
<date>:<time>:script:<pkg>:<type>:<group>:<exit status>:<exit string>
```

where

- *<pkg>* is null
- *<type>* is one of *start*, *stop*, *cancel*, *pause*, *resume*, or *abort*
- *<group>* is the SE Group to which this SE (the one running the script) belongs
- *<exit status>* is the return code from the Tcl interpreter for types *stop*, *cancel*, and *abort* only
- *<exit string>* is the possibly truncated Tcl result of script execution for types *stop*, *cancel*, and *abort* only.

#### Examples

```
19960613:161728:script::stop:SeGpl:TCL_OK:
```

```
19960809:171420:script::stop:SeGpl:TCL_OK:Compares OK
```

### 2.5.6.6 Summary Events

Summary events are written to the output file at script completion time. They include the system variables, the results that are sent to the database, and the symbol table. They have the format

```
<date>:<time>:summary:general:var:xmyVar(<name>) <value>  
<date>:<time>:summary:general:results:<results list split into 80 char lines>  
<date>:<time>:summary:general:symtbl:<symbol table split into 80 char lines>
```

#### Examples

```
19960613:161728:summary:general:var:xmyVar(Channel)      = xmySE0007SD1  
19960613:161728:summary:general:var:xmyVar(DatabaseMode) = 1  
19960613:161728:summary:general:var:xmyVar(EngineMode) = stateLess  
19960613:161728:summary:general:var:xmyVar(EngineType) = background  
19960613:161728:summary:general:var:xmyVar(ExitHandler) =  
19960613:161728:summary:general:var:xmyVar(FailedCompares) = 0  
19960613:161728:summary:general:var:xmyVar(GoodCompares) = 1  
19960613:161728:summary:general:var:xmyVar(LibraryPath) = /home/mynah/lib  
19960613:161728:summary:general:var:xmyVar(OutputLevel) = error  
19960613:161728:summary:general:var:xmyVar(RuntimeId) =  
19960613:161728:summary:general:var:xmyVar(SEGroup) = SeGp1  
19960613:161728:summary:general:var:xmyVar(SubmittedBy) = ksb  
19960613:161728:summary:general:results: {result {}}  
19960613:161728:summary:general:results: {goodCompares 1}  
19960613:161728:summary:general:results: {failedCompares 0}  
19960613:161728:summary:general:results: {warningCompares 0}  
19960613:161728:summary:general:symtbl:<symbol table empty>
```

### 2.5.6.7 Sutimage Events

Sutimage events are produced for only the Term3270, TermAsync, and App-to-App Packages. If sutimage events are being produced, then each time a screen or message is sent or received a sutimage event is produced having the format

```
<date>:<time>:sutimage:<pkg>:<type>:<conn>:<opt>:<index>:<length>
```

where

- *<pkg>* is the name of the MYNAH package producing the sutimage
- *<type>* is one of *snd*, *rcv*, or *state*. (*state* is used to produce a record of the “current” screen. It is used by the TermAsync package only.)
- *<conn>* is the handle of the connection
- *<opt>* is an optional field used by the domain to indicate the cause of the sutimage
- *<index>* is a pointer to the start location of the sutimage in the *SUTimage* file
- *<length>* is the length (in domain-specific units) of the image.

#### Examples

```
19960613:161727:sutimage:TermAsync:snd:.xmyTermAsync_37::2207:3
```

Each package may add additional fields as needed.

If you run code in background (i.e., from the Script Builder) and you do not select the **Generate Script Output** option on the Script Builder, then, in the Script Builder’s **Log** view, the sutimage event will have an *index* of -1 and a *length* of 0, for example

```
19960914:115437:sutimage:TermAsync:snd:.xmyTermAsync_4::-1:0  
19960914:115437:sutimage:TermAsync:rcv:.xmyTermAsync_4::-1:0
```

### 2.5.6.8 SUT Timing (suttiming) Events

SUT timing events are produced for only the Term3270, TermAsync, and App-to-App Packages. Timing events are logged each time a message is received from the SUT. They have the format

```
<date>:<time>:suttiming:<pkg>::<conn>:<command>:<send time>:<seconds>
```

where

- *<conn>* is the connection handle
- *<command>* is the Tcl command that sent data to the SUT
- *<send time>* is the time of the last send in readable format
- *<seconds>* contains the number of seconds elapsed since the last send.

#### Examples

```
19960613:161726:suttiming:TermAsync::.xmyTermAsync_37::06/13/96 16:17:26:0:10
```

### 2.5.6.9 Test Object Events

Test Object (testobj) event lines are produced by the **xmyBegin** (Section 7.2.2) and **xmyEnd** (Section 7.2.6) commands. Test object event lines take one of these two forms

```
<date>:<time>:testobj:<pkg>:begin:<id>
```

```
<date>:<time>:testobj:<pkg>:end:<id>
```

where

- *<pkg>* is null
- *<id>* is the test object id or test block label.

#### Examples

```
19960809:171419:testobj::begin:2307
```

```
19960809:171421:testobj::end:2334
```



### 2.5.6.10 User Events

User events are produced on a per user basis. The MYNAH System provides a method for script writers to generate their own events to the output file using the **xmyPrint** command (Section 7.2.11). They have the format

```
<date>:<time>:user:<pkg>:<type>:<text>
```

where *<pkg>*, *<type>* and *<text>* are provided by you through the MYNAH **xmyPrint** command.

User events can be used to surround processing statements with comments that help you in analyzing execution results.

#### Examples

```
19960611:145636:user:::MAIN  
19960611:145636:user:::LEAVING PROC inits (/users/kjb/scripts/parent/par002.tcl)
```

## 2.5.7 The result File

The *result* file contains the output from the script output in a user-readable format.

The *result* file is generated if you specify the **-u** option when you submit a script for execution, such as

```
xmyCmd submit -v -E -c -G -u myscript.tcl
```

**NOTE** — If you do not specify the **-u** option when submitting a script, you can still view the output in this format by using **xmyCmd**'s **mergeOutput** sub-command, for example

```
xmyCmd mergeOutput -u -s SUTimage..xmyTerm3270_1
```

For information on the **mergeOutput** sub-command, see Section 17.2.11 of the *MYNAH System Users Guide*.

The *result* file contains two sections: a **Run** section and **Summary** section.

### 2.5.7.1 Run Section

The **Run** section contains all of the statements from the *output* file with the contents of other files in the *output* directory merged in at appropriate places. The content depends on the specified Output Level.

The **Run** section displays text using the following conventions:

- Script commands start with "--", for example

```
--xmyTerm3270 connect
```

- Screen output (the screens that are sent and received) contains line numbers, for example, the following text appears on line 20 on a 3270 connection window:

```
20 INPUT APPLICATION NAME AND PRESS ENTER
```

- Return values and other output events appear left-justified, for example:

```
compare:General:data:First Compare:good:0  
COMPARE HEADER - xmyCompare (index:0)  
expr: $counter == 10  
result: 1 (good)  
COMPARE FOOTER - xmyCompare
```

### 2.5.7.2 Summary Section

The *Summary* section displays the Summary Events from the *output* file (see [Section 2.5.6.6](#)), in a user readable format.

### 2.5.7.3 result File Example

The following example illustrates a *result* file where the Output Level was set to *all* when the script was submitted.

**NOTE** — The Screenshot portion contains only excerpts from the **send** and **receive** screens, and the *Summary* section contains only an excerpt from the *output* file's Summary events.

```
***** RUN STARTING 12/8 1998 17:35:42 *****
script::start:SeGp2, /export/home/pt06/scripts/sanity/temp.tcl
--xmyLoadPkg Term3270
--set counter 10
--xmyPrint -text "start 3270"
start 3270
--xmyTerm3270 connect
suttiming:Term3270::.xmyTerm3270_2:sent ::0.000000
--Screen received (12/8 1998 17:35:44):.xmyTerm3270_2::0:0
01
02
03 INPUT APPLICATION NAME AND PRESS ENTER
04
05
06
07
--set conn10 [xmyTerm3270 connect ]
--Screen sent:.xmyTerm3270_4::6018:0
01
02
03
04
05 INPUT APPLICATION NAME AND PRESS ENTER
06 st8
--$conn10 disconnect
--xmyPrint -text "completed 3270"
completed 3270
--xmyCompare -label "First Compare" -expr {$counter == 10}
compare:General:data:First Compare:good:0
COMPARE HEADER - xmyCompare (index:0)
expr: $counter == 10
result: 1 (good)
COMPARE FOOTER - xmyCompare
--xmyExit "Got to the end"
script::stop:SeGp2:TCL_OK:Got to the end
***** RUN ENDED 12/8 1998 17:35:44*****
```

```
***** SUMMARY *****  
xmyVar(Channel) = xmySE0002SD2  
xmyVar(DatabaseMode) = 1  
xmyVar(EngineMode) = connState  
xmyVar(EngineType) = background  
xmyVar(ExitHandler) =  
xmyVar(FailedCompares) = 0  
xmyVar(GoodCompares) = 1  
xmyVar(LibraryPath) = /opt/SUNWmynpt1/mynah/lib  
xmyVar(MaxFails) = 2147483647  
xmyVar(MaxFailsHandler) =  
xmyVar(OutputLevel) = *  
xmyVar(RuntimeId) =  
xmyVar(SEGroup) = SeGp2
```

## 2.6 Database Output

Database output is only produced when a script is associated with a Script Object. Database output consists of the Runtime Object and possibly Result Objects.

### 2.6.1 Runtime Objects

One Runtime Object is produced for each run of a script associated with a Script Object. The Runtime Object records information about the executed script such as

- The script name
- Who submitted the script
- When script execution started and ended
- The SD and SE Group that executed the script
- Where the output from the execution is located
- The execution status
- A summary of the execution, e.g., any errors that aborted the execution.

Runtime Objects can be accessed from the GUI's Database Browser, Job Status window, or a Script Object Run History View. For more information on Runtime Objects, see the *MYNAH System Users Guide*.

Several fields are updated in the Runtime Object:

**NOTE** — These fields are visible in the Job Status Object.

- **Run Status** — This is set to either completed, aborted, or canceled
  - completed - ran to some normal termination
  - aborted - run aborted due to execution problem (for example, "cannot open outputDir")
  - canceled - script execution was canceled before completion
- **Run Summary** — This is set to the result of the last Tcl statement that was executed. For example, if the last statement executed in a script was

```
xmyExit "success"
```

then the Run Summary field will be set to "success". See Section 6.6 on the **xmyVar(ExitHandler)** variable for further discussion on how script writers can control the value of Run Summary.

- **Tcl Code Status**— This is set to the exit code of the Tcl interpreter. The values can be
  - N/A- script never started executing
  - TCL\_OK - script exited without a Tcl error
  - TCL\_ERROR - a Tcl error was produced. The most common reason for this is a syntax error in the Tcl code.

## 2.6.2 Result Objects

Result Objects record actual results for particular Tests. One or more Result Objects may be produced each time a script is executed.

Result Objects are produced if

- The script code contains **xmyBegin** (Section 7.2.2) and **xmyEnd** (Section 7.2.6) statements. In this case one Result Object will be created for each **xmyBegin/xmyEnd** pair.
- If there are no **xmyBegin/xmyEnd** statements but the script object is associated with one and only one Test Object.

In this case one Result Object will be created for the associated Test.

Result Objects are accessed from the GUI's Database Browser or from a Test Object Results view. For more information on Result Objects, see the *MYNAH System Users Guide*.

If a Script is associated with only one Test or if a Script has **xmyBegin** (Section 7.2.2) and **xmyEnd** (Section 7.2.6) statements, then the SE will create one or more Result Objects. The SE fills in Total counts for Successful, Warning and Failed compares. These values come directly from **xmyVar** values.

The SE also provides values for Activity State, Test Status, Status Source and Reason Code. For a complete discussion about these fields, please see the *MYNAH System Users Guide*.

## 2.7 Execution Without Database Update

You may create and run script code even if you don't create a Script Object or if you have a Script Object but you don't want the database to be updated (such as when you are automating a task).

You can do this in one of three ways:

- Use the **xmyCmd submit** command with the **-c** option
- Run the code interactively in the Script Builder
- Run the code interactively using **xmytsh**

**NOTE** — For more information about these methods, refer to the MYNAH Users Guide.

## 2.8 Loading Procedures

A Tcl procedure is a script that is used to invoke a command, letting you reuse the script. See [Section 4.7](#) for information on procedures.

A script can access (i.e., can call) procedures using any of the following methods:

1. Procedures can be defined locally within a script, for example, the following procedure will add two numbers together:

```
> proc sum { a b } { return [expr $a+$b] }
```

This procedure can later be called, as in

```
> sum 2 3  
5
```

2. You can save the procedures to a file and then load them into your script using the **source** command ([Section 4.11](#)).

**NOTE** — You can save more than one procedure in each file.

For example, you could save the addition procedure in [Item 1](#) to a file, e.g., *myprocs.tcl*, and load it by typing

```
source myprocs.tcl
```

in your script. You can then use the addition procedure by typing

```
> sum 3.45 8.53  
11.98
```

3. You can use any autoloadable procedures. These are procedures that are searched for by the Tcl interpreter the first time they are called in a script. The search path can be set for the **ProcRepository** parameter in the MYNAH configuration file, *xmyConfig*.

The default value for the **ProcRepository** parameter is `$XMYDIR/lib/tcl:$XMYHOME/lib/tcl`. The setting of this field affects the setting of the standard Tcl variable `auto_path`. A script writer with procedures defined in other directories can add paths to the `auto_path` variable directly in the script.

**NOTE** — See Appendix [A.30](#) for more information on creating procedure libraries and global variables that are defined or used by the procedures in the Tcl library.

The **Insert Template** dialog on the MYNAH GUI's Script Builder and Script Object displays all procedures that are found in the procedure libraries. (See the *MYNAH System Users Guide*.)

Administrators can override what is displayed in the **Insert Template** dialog by manually creating template files. By default, however, bringing up **Insert Template** and changing **Type** to **Procedure** will display all procedures the Tcl interpreter can automatically load (i.e., those in `$XMYDIR/lib/tcl:$XMYHOME/lib/tcl`).

**NOTE** — Procedures libraries in directories not specified in the **ProcRepository** parameter in the *xmyConfig* file **do not** show up in **Insert Template**.



## 3. Scripting Hints

This section contains hints that you may find useful as you create your scripts.

**NOTE** — This section will often use MYNAH scripting terms that will be explained in later sections. You may wish to come back to this section after you have read these later sections.

### 3.1 Concealing Sensitive Data

For security reasons, sensitive data, such as passwords, is usually concealed. The MYNAH System provides several means of entering sensitive information.

#### 3.1.1 Prompting for Sensitive Data using the Script Builder

You can use the **xmyPrompt** command (for more information on **xmyPrompt** see [Section 7.2.12](#)) to prompt you (or another user) to enter a password.

**NOTE** — You can only use **xmyPrompt** when you are running code in the MYNAH GUI's interactive Script Builder since this command requires the use of an embedded SE, which is only available when using the Script Builder.

For example, if you enter the following code in the Builder

```
keylset psswd -prompt "Enter Password" -echo false  
set result [xmyPrompt [list $psswd]]
```

The GUI will display the window in [Figure 3-1](#) when you run the script from the Script Builder and the script reaches the **xmyPrompt** command.

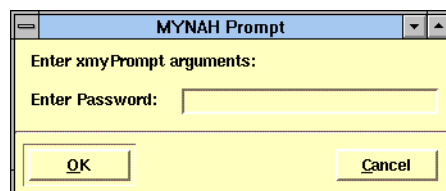


Figure 3-1. xmyPrompt Window

**xmyPrompt** takes as its input the keyed list created by the **keylset** command. The data that you enter is saved to the variable *\$result*. The variable *\$result* can be used in a subsequent command, e.g.,

```
$conn1 type -position "9 12" -text $result
```

to enter the password in the password field.

**NOTE** — See the **tclhelp** tool for information on the **keylset** command.

### 3.1.2 Obtaining Sensitive Data for Scripts That Run in the Background

To allow you to pass sensitive data to the background SE, the MYNAH System provides the means for encrypting and loading data stored in files.

The **xmyUdb** command lets you load and save sensitive data into your scripts. These files can be used for databases or to hold such sensitive material as passwords. For security reasons, the files can be encrypted using the **des** system software, which is part of the Encryption Kit supplied along with the operating system, see Administration Guide for details. For added security, the key used to decrypt the encrypted file can be scrambled using the CLUI command **xmyCmd scramble**.

**NOTE** — **des** is only available in the United States. Since the MYNAH utilities use **des** for encryption and decryption, the methods described in this section will only work in the U.S.

A **clear tag-value database** is an ASCII file containing two columns separated by spaces or tabs. The first column contains the tag, and the second column contains the values. For example, if you wanted a file containing a list of login ids, you could enter them as in the following:

```
#Tags  Ids
1stId  kjd
2ndId  ksb
3rdId  lsmyth
```

Lines beginning with a pound sign (#) are treated as comments. This lets you label columns, as we did in the previous list of login ids.

An **encrypted** database is simply a clear database that has been encrypted using **des**.

The MYNAH System provides several utilities that let you process encrypted material via your scripts.

#### 3.1.2.1 xmyUdb

The **xmyUdb** command (see Section 7.3.1) lets you load a tag-value file into a Tcl script as a keyed list that can be accessed and modified using the standard keyed list functions, e.g., **keylget** and **keylset**, etc. If you've encrypted the file, you can have **xmyUdb** decrypt it. Conversely, you can have **xmyUdb** write keyed lists to a tag-value file, and, if you desire, encrypt the file.

**NOTE** — See the **telhelp** tool for information on the **keylset** command.

#### 3.1.2.2 xmyCmd scramble

The **scramble** sub-command to the MYNAH CLUI command **xmyCmd** (see Section 7.3.2 of this guide and the *MYNAH System Users Guide*) scrambles the generated key that is used by **xmyUdb**. This lets you safely leave the keys in flat files (like Tcl scripts). Scrambled keys can be entered in the **Engine** entries in the MYNAH *xmyConfig* system configuration file or provided when loading or saving sensitive data. The SE internally unscrambles the key and uses it to decode encrypted tag-value files.

### 3.1.2.3 Encrypted Database Files using des

To create an encrypted database, follow these steps:

1. Create a clear database file.
2. Type the command:

```
des -e input-file output-file
```

where

- *input-file* is the name of the clear database file
  - *output-file* is the name to be given to the encrypted database file.
3. When you are prompted for a key that **des** should use to do the encryption, enter a key (eight characters or fewer).

**NOTE** — Be sure to make a note of the key that you use for the encryption. *You won't be able to decode the encrypted file without the key.*

For example, to encrypt a file called *pass*, which contains passwords, save it as a file called *pass.e*, and use a key *enter*, you could type

```
des -e pass pass.e
```

The following will appear, prompting you to enter the key:

```
Enter key:
```

4. Delete the clear database file.

You can enter the key directly as an argument to **des**, as in the following:

```
des -e -k enter pass pass.e
```

For a MYNAH script to decrypt the encrypted file that you just created, it must know the key that you used.

There are several ways to provide the key. The recommended order of these methods is as follows:

1. Have the MYNAH Administrator enter the key (scrambled or unscrambled) as an argument to the **Key** parameter for an **Engine** entry in the *xmyConfig* file. For example, if the key has been entered as an argument to the **Key** parameter, you would enter a line such as the following:

```
set ids [xmyUdb read -file pass.e -decrypt]
```

**NOTE** — Anyone who knows the key, however, can decode the encrypted file and read its contents. For that reason, we recommend you use **xmyCmd scramble** to scramble the key.


2. Enter the key (scrambled or unscrambled) directly as an argument for **xmyUdb**, for example

```
set ids [xmyUdb read -file pass.e -decrypt -key enter]
```

3. If you're running a script from theScript Builder, you can enter the **xmyPrompt** command in the script and have the script prompt you for the key, for example

```
keylset key_prompt -prompt "Enter des Key" -echo false  
set des_key [xmyPrompt [list $key_prompt]]  
set ids [xmyUdb read -file pass.e -decrypt -key $des_key]
```

The window in [Figure 3-2](#) appears.

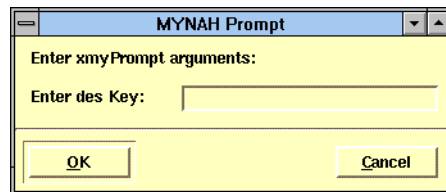

**Figure 3-2.** Example Window Prompting for des Key

### 3.1.2.4 Using an Encrypted File

One of the main uses of encrypting a file and loading it into a MYNAH script would be to load passwords. When using the GUI, you can use the **xmyPrompt** command to prompt you for the password, but you can't do this if you run a script from the command-line (using **xmytclsh**) or from the background (using **xmyCmd submit**).

What you can do is enter the password in a tag-value file and encrypt it. In fact, you can use the same file to load the login id, too.

#### 3.1.2.4.1 Working With Keyed Lists

Before we begin, let's look briefly at how you work with a keyed list.

This is the list of ids we mentioned in Section 3.1.2.

```
#Tags Ids
1stId kjd
2ndId ksb
3rdId lsmyth
```

We saved this list to a file called *IDS*. Using **xmyUdb**, we can load this file as a keyed list.

```
set ids [xmyUdb read -file $env(HOME)/data/IDS]
{1stId kjd} {2ndId ksb} {3rdId lsmyth}
```

**NOTE** — Notice that beginning the line

```
#Tags Ids
```

with a pound sign commented this line. Therefore it did not appear in the return from the **xmyUdb** command.

This line was added only to illustrate the contents of each column, labeling each column.

Using the **keylget** command we can extract values from this list by specifying the tag.

```
set id1 [keylget ids 1stId]
kjd
```

**keylget** searches the keyed list for the tag we specified, in this case *1stId*, and extracts the value associated with it, *kjd*.

Using the same techniques, you can extract values from an encrypted file simply by adding the **-decrypt** argument and the decryption key, as described in Section 3.1.2.4.2.

### 3.1.2.4.2 Example of Loading Data from Keyed Lists

For our example, we'll use the login id and password for an anonymous **ftp** session.

**NOTE** — While the password for an anonymous **ftp** session (usually your e-mail address) is not sensitive data, the techniques we'll use will apply for cases where the password is sensitive.

1. Create a flat file — let's call it *login* — containing the id and password as tag-value pairs, one pair per line, such as:

```
#Tag      Value
1stId     anonymous
1stPass   kjb@
```

2. Encrypt the file *login* (with the key *open*) and save it as a file called *login.e*.

```
des -e -k open login login.e
```

3. Delete the *login* file.

4. If you want, you can scramble the key *open*. In our example we're saving it to a file called *key1*.

```
xmyCmd scramble -k open key1
```

The output file is optional, but this way you have a permanent record of the scrambled key. Even if someone else gains access to this scrambled key, they would not be able to use it to decrypt your file; only an SE can use the scrambled key to decrypt the file when it is running a script.

5. You can now load this file, as in the following.

```
xmyLoadPkg TermAsync
set conn2 [xmyTermAsync connect]
set logon [xmyUdb read -file $env(HOME)/data/login.e \
          -decrypt -key [read file key1]]
set logid [keylget logon 1stid]
set password [keylget logon 1stpass]
$conn2 sendWait "ftp fake_ftp.com\r" -expect ": "
$conn2 sendWait "$logid\r" -expect "d:"
$conn2 sendWait "$password\r" -expect "> "
$conn2 sendWait "cd pub/new_this_week\r" -expect "> "
$conn2 sendWait "prompt\r" -expect "> "
$conn2 sendWait "lcd /u/kjb/NEW\r" -expect "> "
$conn2 sendWait "mget *\r" -expect "> "
$conn2 sendWait "bye\r" -expect ": "
$conn2 disconnect
xmyExit
```

### 3.1.3 Concealing Sensitive Data in Async *SUTimages* Files

You can conceal sensitive data in an Async *SUTimages* file by using the **-secret** option for a **send** (See [Section 9.5.1.10](#)) or **sendWait** (See [Section 9.5.1.11](#)) method. When you use this option, the string that is sent to the SUT will not appear in the *SUTimages* file associated with that connection. In its place, the string *<hidden data>* will appear.

**NOTE** — See [Section 2.5.4](#) for more information about the *SUTimages* file.

For example, you are logging onto a SUT and you must enter your password. If *moses123* is your password, you would code the following (with additional options that you would want and the appropriate string for the **-expect** option):

```
$conn5 sendWait "moses123\r" -expect "\]" -secret
```

After you replay the script or code that contains this command, the *SUTimages* file associated with **\$conn5** will contain the following information (note that index shown below is an example):

```
IMAGE HEADER - String Sent (index:17014)  
<hidden data>  
IMAGE FOOTER -
```



## 3.2 Debugging - Dealing with Errors and Exceptions

### 3.2.1 Overview

Tcl errors can occur for any number of reasons. You may have mis-typed and entered a nonexistent command. You may not have entered the correct number of arguments. There may be input/output problems. A command may have timed-out. Often, these errors are severe enough to abort processing.

Errors, though, are just part of the Tcl concept of **exceptions**. An exception is any event that can abort a script, be it an error or a command such as **break**, **continue**, and **return**. Tcl has the ability to “catch” exceptions, only part of the script is lost and the script can try to ignore or, if possible, recover from the exception. Using the return value from **catch**, you can code your script to manage the exception condition, e.g., decide whether to continue or gracefully stop a script at that point. The following subsections describe several methods for managing exception conditions.

### 3.2.2 Tcl Error/Exception Information Procedures

Tcl contains several commands related to exceptions, **catch** (Section 4.6.1), **error** (Appendix A.11), and **return** (Appendix A.48). The Tcl command that manages exceptions is **catch**, which can trap the error so that the script does not abort. **error** and **return** do not trap exceptions, but can be used when processing exceptions.

In addition, Tcl contains several global variables, **errorCode** (Section 4.6.2.1) and **errorInfo** (Section 4.6.2.2), that return information resulting from errors.

### 3.2.3 MYNAH Exception Handling

**NOTE** — This section contains excerpts from a script using the Term3270 Package. The commands and methods for the Term3270 Package are used to illustrate using the exception handling processes. For a description of the Term3270 Package, see Section 10.

In general, MYNAH Tcl commands use the standard exception handling facility. If an exception is occurs (the command callback returns **TCL\_ERROR**) and if not caught by the script, then the script aborts and the Tcl interpreter is deleted if the SE is running in **Stateless** or **ConnOnly** mode.

### 3.2.3.1 General Actions

Catching exceptions is done using the Tcl **catch** command.

If a MYNAH or Tcl command fails, the **catch** command

1. Creates a meaningful error message, which can be retrieved if you specify the *varname* argument for the **catch** command.
2. Populates the global Tcl variable **errorCode**. The variable consists of a list with one or more elements, the first of which is the class of error. The second argument is the symbolic name for the particular error. (e.g. **ARGMISSING**.)

**NOTE** — **errorCode** is not implemented for all MYNAH extensions.

3. Returns **TCL\_ERROR**.

### 3.2.3.2 Error Processing

When an error occurs, the current command is aborted. If this command is a child process of a script or procedure (i.e., is part of a larger script), the parent script or process is also aborted, and so on until all active Tcl commands are aborted. A message describing the error is generated and is available via the **errorInfo** and **errorCode** variables, but these may not tell all you need or want to know about where the problem occurred. You may want to generate a specific error message describing what happened and where. In addition, there may be situations where you want to continue script execution after an error has occurred.

In MYNAH 5.2, all error processing should be done via Tcl statements. Wait until a desired response occurs. If it doesn't occur, then you can use **catch** to evaluate the result and use the result of the **catch** command as the input for a way of gracefully exiting from the script.

Figure 3-3 shows an excerpt from a Term3270 package script where you are preparing to logon to a program.

```
set expscreen USERID
$conn type -text "stu08"
if { [catch {$conn sendWait -key enter -expect $expscreen}] } {
    xmyPrint "ERROR: did not get screen: $expscreen"
    syncImokLogoff
    $conn disconnect
    return 0
}
#if get here, have logon screen, enter logid
$conn type -text $logname
```

**Figure 3-3.** Error Processing Example

A facsimile of the logon screen appears in Figure 3-4.

```
AUTHORIZED USE ONLY - IMOK STU08
DATE: 05/31/96      TIME: 13:21:53
NODE NAME: TCP10081
USERID:
PASSWORD:
USER DESCRIPTOR:
GROUP NAME:
NEW PASSWORD:
      OUTPUT SECURITY AVAILABLE
```

**Figure 3-4.** Example 3270 Logon Window

On this logon window, you expect to find a string called *USERID*, i.e., this is the value for the **-expect** option. If this string is not found on this screen, then you have connected to the wrong program. If so, you would want to log off from this system and close your Term3270 connection. Therefore, a **catch** command is entered, which evaluates a **sendWait** operation.

The Term3270 method **sendWait** (Section 10.4.1.18) sends a 3270 function key to a system and waits for an expected return. In our example, **sendWait** expects to find the string *USERID* on the current screen. **catch** evaluates this **sendWait** operation. If **sendWait** doesn't find the expected string, the script executes a procedure that logs off from the system and then deletes the connection. If the string is not found, **catch** returns 1, therefore the **if** code is executed. If the expected string is found, the script continues executing, i.e., **catch** returns 0, therefore the **if** code is not executed and the script continues.

**NOTE** — **syncImokLogoff** is a locally defined procedure used to log off from a system called IMOK.

### 3.3 Output Ownership Considerations

How you execute a script impacts ownership of any output files. When you submit a script for background execution, the system assigns ownership of the executing script and all output to the MYNAH Administrator or the person who started the MYNAH processes.

**NOTE** — The following discussion assumes that the logid of the MYNAH Administrator is *madmin* and that *madmin* started the MYNAH processes.

**NOTE** — This section uses the TermAsync method **sendWait** to illustrate these techniques. Briefly, **sendWait** sends a string, such as a login id or a UNIX command, to the connection and waits until an expected string is returned, such as

```
sendWait "ls\r" -expect "$ "
```

In this case, **sendWait** sends the **ls** command and waits until it receives the **\$** prompt, which is the prompt of the initiator of the MYNAH processes. For a complete explanation of **sendWait**, see Section 9.5.1.11.

If you want your script to generate output files, we recommend the following measures.

#### 3.3.1 Execution Directory Permissions When Using the BEE

When you execute a script using **xmyCmd submit**, the system generates several files in the directory containing the script. **madmin** must have permission to write these files in this directory. Typically, you will be part of the same UNIX group that **madmin** is. For example, if you decide to create a directory to contain all of your scripts, e.g. *scripts*, you should grant read/write permissions to **madmin** (and therefore the UNIX group to which you and **madmin** belong) as in

```
chmod 775 scripts
```

#### 3.3.2 File Ownership When Using the BEE

Besides the system output files, you can have the MYNAH System save files generated by the script, such as a capture of the current screen or files transferred by an **ftp** session. If you execute the script from the background, *madmin* will own all of the files in the output directory and the output directory itself; you will have only read permissions for these files.

If this happens, you can include statements in your script to change the permissions of the user-specified output files.

The script in [Figure 3-5](#) makes a connection, lists the contents and pathname of the current directory, and saves the most recent response and screen in the files */users/kjb/OUTPUT/screen* and */users/kjb/OUTPUT/path*, respectively. We then send a **chmod** command to change the permissions on those files.

```
xmyLoadPkg TermAsync
set conn1 [xmyTermAsync connect]
$conn1 sendWait "PS1=\"% \"\r" -expect "% "
$conn1 wait -expect "% "
$conn1 sendWait "ls\r" -expect "% "
$conn1 sendWait "pwd\r" -expect "% "
$conn1 response -file /users/kjb/OUTPUT/path
$conn1 screen -file /users/kjb/OUTPUT/screen
$conn1 sendWait "chmod 666 /users/kjb/OUTPUT/path\r" \
               -expect "% "
$conn1 sendWait "chmod 666 /users/kjb/OUTPUT/screen\r" \
               -expect "% "
$conn1 disconnect
xmyExit
```

**Figure 3-5.** Example Script to Change Permissions of Output Files

### 3.4 Setting Output Levels

The amount of output that is generated is controlled in one of two ways:

- The MYNAH Administrator sets initial output levels by entering a value for the **OutputLevel** parameter of **Engine** entry in the *xmyConfig* file.
- You can control the output level for an entire script or part of a script using the **xmyVar(OutputLevel)** array variable. (See [Section 6.13](#).)

Valid **OutputLevel** values for the events that can be recorded are

<i>childscr</i>	Records child script events.
<i>compare</i>	Records comparison events.
<i>error</i>	Records error events.
<i>lang</i>	Records language events.
<i>script</i>	Records script events.
<i>summary</i>	Records summary events.
<i>sutimage</i>	Records SUTimage events.
<i>suttiming</i>	Records SUT Timing events.
<i>testobj</i>	Records test object events.
<i>user</i>	Records user events.

Input to **xmyVar(OutputLevel)** is a Tcl list of zero or more of the **OutputLevel** event values listed above. In addition to these values, you can also use the following to set the output level:

- Setting **OutputLevel** to nothing using an empty string "", for example,

```
set xmyVar(OutputLevel) ""
```

means that no subsequent events will be recorded in the output file.

**NOTE** — The value for the **xmyVar(OutputLevel)** variable is returned or set using the Tcl command, **set**. See [Section 4.1.3](#) and [Appendix A.51](#) for information on using the **set** command.

- Setting **OutputLevel** to everything by using an asterisk (\*), for example,

```
set xmyVar(OutputLevel) *
```

means that output will be created for all valid types.

It is suggested that:

- You should always choose to produce, at minimum, *script* and *error* events.
- You should never choose *lang* events for an entire script. These events are useful when attempting to debug a script but you should turn them on by using **xmyVar(OutputLevel)** with the *lang* value just before the lines of code that are causing the problem.

### 3.4.1 Returning the Current Output Level

To see what the current output level setting is, simply type

```
set xmyVar(OutputLevel)
```

In the following example, we see that script and error events are set.

```
> set xmyVar(OutputLevel)
script error
```

### 3.4.2 Changing the Output Level

To change the output level, enter the **OutputLevel** values for events you want to record as input to the **xmyVar(OutputLevel)** variable. The event values are entered as elements of a list delimited by braces ({}), for example

```
> set xmyVar(OutputLevel) {error childscr compare script user}
error childscr compare script user
```

The new output level will be *exactly* what you enter as the input to **xmyVar(OutputLevel)**, overwriting the previous level. For example, if your initial output level setting is the recommended minimum setting of producing *script* and *error* events and you want to temporarily produce output for *lang* events in addition to *script* and *error* events, you must enter all three event values as input to **xmyVar(OutputLevel)**, as in

```
> set xmyVar(OutputLevel) {script error lang}
script error lang
```

## 3.5 Script Termination

This section presents several hints to consider when you decide how to terminate your script.

### 3.5.1 Using a Termination Procedure

When a script terminates, there are common activities that should occur. For example, typical "end of script" processing involves producing a message in the script output file that summarizes script success or failure.

It is advisable to centralize all final processing in a termination procedure because:

- Scripts will be standardized: all scripts will perform the same "end of script" processing.
- Script maintenance will be reduced: any updates are confined to one script.

Consider the example presented above producing a standard message upon script termination. This could be done by checking the global variable *xmyVar(FailedCompares)* and passing an argument to the *xmyExit* command, as in the following example:

```
if {xmyVar(FailedCompares) == 0} {  
    xmyExit "OK: no failed compares"  
} else {  
    xmyExit "ERROR: at least one compare failed"  
}
```

Without a termination procedure, everyone who is coding scripts would have to include these commands in their scripts. Yet, with a termination procedure (e.g, **exitProc**), which would contain these same commands, the only command that's required in everyone's scripts is the command to invoke the procedure, as in the following example:

```
exitProc
```

An alternative to including a command in the script to invoke the procedure would be to use the MYNAH termination procedure *ExitHandler*. This procedure can be invoked automatically when the script reaches its end by setting the global array variable *xmyVar(ExitHandler)*. For more information about using this procedure, see [Section 6.6](#).



### 3.5.2 Cleanup for Scripts Sent to ConnOnly and Fullstate SEs

For a script that is submitted to an SE whose state is *ConnOnly* or *Fullstate*, connections that were opened in the script remain active when the script terminates.

Because of this, the script should contain the code that will bring opened connections to an appropriate state in the system where they will be ready for use when the next script comes along for execution. For example, if the first script logs onto an application, the appropriate state for the next script could be the first screen after the *logon* process completes. That's where the first script should "leave off."

One method for coding for this situation is to include the required code in a procedure, possibly an *ExitHandler* procedure. For more information about using this procedure, see [Section 6.6](#).

### 3.5.3 Sample Code

This section illustrates one simple example of the procedures used to terminate a script. The example assumes you have logged on to a system called *imok* and are testing a program called *kurtz*.

1. If logged onto a SUT, log off.
2. Disconnect the MYNAH connection.
3. Exit from the script.

**NOTE** — This section contains excerpts from a script using the Term3270 Package. The commands and methods for the Term3270 Package are used to illustrate the script termination processes. For a description of the Term3270 Package, see [Section 10](#).

Figure [3-6](#) shows an example of how the procedures used to terminate a script may be accessed by a script. The **KurtzOff** procedure (Figure [3-7](#)) logs off from *kurtz*, the

**ImokLogoff** procedure (Figure 3-8) logs off from *imok*, and the **GenEnd** procedure (Figure 3-9) exits the script.

```
# SCRIPT TERMINATION PROCEDURE CALLS AT BOTTOM OF SCRIPT
#if get here, need termination processing

#log off kurtz
KurtzOff $conn

#log off imok
ImokLogoff $conn

#exit the script
GenEnd $conn
```

**Figure 3-6.** Example Script Termination Procedures

Let's examine each of these procedures. Notice that each procedure has an argument for the connection handle. This "tells" the procedure the name of the connection in which to perform the commands.

Figure 3-7 shows the **KurtzOff** procedure. To exit from the *kurtz* system, you must enter the character "X" in row one, column two on the current screen. The procedure sends this character to the SUT via the **type** method. After pressing the enter key, it the **Kurtz Selection Screen** is not displayed, however, this will create an error, so the **catch** command is used to "catch the error." This allows you to code the script to manage the error condition. In this case, the procedure prints a message and returns a "0."

```
proc KurtzOff {conn} {

#LOG OFF KURTZ

    set expscreen {"KURTZ SELECTION SCREEN"}

    #access entity screen
    $conn type -text "X" -position {1 2}

    if {[catch {$conn sendWait -key enter -expect $expscreen}]} {
        xmyPrint "ERROR: did not get screen: $expscreen"
        return 0
    }

    #if get here, no errors
    return 1
}
```

**Figure 3-7.** Example SUT Log Off Script

Figure 3-8 shows the **ImokLogoff** procedure. To log off from the *imok* system, you must enter the string */rcl* on the connection window. The **catch** command is used again (see preceding description).

```
proc ImokLogoff {conn} {
#PURPOSE: LOG OFF IMOK

    #log off
    $conn type -text "/rcl" -position {1 2}
    if {[catch {$conn sendWait -key enter}]} {
        xmyPrint "ERROR: /rcl failed"
        return 0
    }

    #if get here, no errors
    return 1
}
```

**Figure 3-8.** Example System Log Off Procedure

Figure 3-9 shows the **GenEnd** procedure. The procedure first uses the **global** command to make the **xmyVar** global array accessible to the procedure. This lets you print the counts generated by the **xmyVar** comparison elements. The script prints the contents of the **xmyVar** comparison elements. Finally, the script exits. If an exit string is specified, then the script exits with the exit string. This is very similar to what you might do if you are coding an *ExitHandler* procedure.

```
proc GenEnd {conn {exitstr ""}} {
# PURPOSE: TERMINATE A SCRIPT

    global xmyVar

    # PRINT COUNTS FROM GLOBAL ARRAY
    xmyPrint -text $xmyVar(GoodCompares)
    xmyPrint -text $xmyVar(FailedCompares)
    xmyPrint -text $xmyVar(WarningCompares)

    #finally, exit the script
    if {$exitstr != ""} {
        xmyExit $exitstr
    } else {
        xmyExit
    }
}
```

**Figure 3-9.** Example Script Exit Procedure

### 3.6 UNIX Commands in Scripts

You can include UNIX commands in your scripts, but how you use UNIX commands depends on what type of SE you use to execute the script.

If you submit a script using a Command-line SE, you can simply enter the UNIX command. If you are using an Embedded or Background SE, UNIX commands must be “exec”ed, that is you must preface the command with the Tcl **exec** command (Appendix [A.13](#)).

For example, in **xmytclsh** (for a Command-Line SE) typing

```
vi examplefile.txt
```

runs the UNIX **vi** command in the window **xmytclsh** is in. In the Background SE, a script containing the line **vi /tmp/file** will exit abnormally with the message

```
error: Auto execution of Unix commands only supported as  
interactive commands. Use "exec" to execute "vi"
```

You must enter this command as

```
exec ping myserver
```

for Embedded or Background SEs.

You can use the **env** array to read and write \$HOME environment variables. For example, to read in your home directory and assign it to a Tcl variable, you would type

```
set path $env(HOME)  
/u/kjb
```

## 4. Tcl Basics

This section is designed to be a basic introduction to Tcl. After you finish this section, you should have a basic knowledge of the language. This section is divided into several subsections, each detailing a specific Tcl category. Table 4-1 lists these subsections.

**Table 4-1.** Section Contents

Section Name	Description	Section Number
<i>Before We Begin</i>	This subsection introduces some basic ideas and concepts, including a discussion of some basic Tcl commands.	<a href="#">4.1, Page 4-2</a>
<i>Expressions</i>	This subsection discusses the basics of Tcl expressions using the TCL operands, operators, and math functions.	<a href="#">4.2, Page 4-7</a>
<i>Tcl Syntax</i>	This subsection describes the Tcl syntax, the rules that determine how commands are used, focusing on substitution, quoting, and commenting.	<a href="#">4.3, Page 4-15</a>
<i>Lists and Arrays</i>	This subsection describes the Tcl facilities for handling collections of data.	<a href="#">4.4, Page 4-21</a>
<i>Control Flows</i>	This subsection describes the Tcl commands (e.g. <b>if</b> , <b>while</b> , and <b>for</b> ) for controlling the flow of script execution.	<a href="#">4.5, Page 4-36</a>
<i>Tcl Error/Exception Procedures</i>	This subsection describes Tcl command for trapping errors so that a script does not abort.	<a href="#">4.6, Page 4-46</a>
<i>Procedures</i>	This subsection describes the methods of creating new Tcl command procedures.	<a href="#">4.7, Page 4-50</a>
<i>String Manipulation</i>	This subsection describes the basics of pattern matching for string manipulation.	<a href="#">4.8, Page 4-53</a>
<i>File Input/Output</i>	This subsection describes basic Tcl input/output functions, concentrating on opening and closing files.	<a href="#">4.9, Page 4-55</a>
<i>Using xmytclsh</i>	This subsection describes the use of the <b>xmytclsh</b> program to test Tcl commands.	<a href="#">4.10, Page 4-59</a>
<i>Importing Scripts Using the source Command</i>	This subsection provides basic information on how to import scripts for execution.	<a href="#">4.11, Page 4-60</a>

## 4.1 Before We Begin

There are some basic concepts and ideas that we must first mention before we begin. In addition, a rudimentary knowledge of a few basic Tcl commands, **set**, **unset**, **expr**, **append** and **incr**, which are used in examples in the following sections, will also be helpful.

**NOTE** — These are only brief descriptions of these basic commands. Complete descriptions of these commands and all basic Tcl commands can be found in [Appendix A](#).

### 4.1.1 Examples in this Document

The MYNAH System provides a utility program, **xmytclsh** ([Section 4.10](#)), that lets you interactively run Tcl commands, including all MYNAH extensions.

When you start the program, the **xmytclsh** prompt (`>`) appears. The response returned from each command entered to **xmytclsh** appears on a separate line without the prompt, as in:

```
xmytclsh
> set x 5
5
```

The examples in this document have been created as if they were entered using **xmytclsh**. You, in turn, may wish to use **xmytclsh** to verify the examples included in this section or to test your own examples.

### 4.1.2 Basic Concepts and Definitions

The only data type in Tcl is a **string**. All commands, arguments, and results are strings. A Tcl string, however, can represent, among other things, integers, floating point numbers, and lists. A string containing words separated by white space is a **list**.

Tcl commands are similar in form to shell commands: each command consists of one or more words separated by spaces or tabs, and `<newline>` or a semi-colon (`;`) ends a command. The first word of each command is always the command name and the rest of the words are interpreted as arguments. What forms the arguments take are determined by each individual command.

One of the basic Tcl strings is the **variable**, a user defined quantity that can assume one of a set of values. You can use the variable to act as input to Tcl commands.

The following subsections describe the basic Tcl commands used to create and manipulate strings. Since they are so basic, we concentrate on creating and manipulating variables.

### 4.1.3 set

#### Syntax

```
set variable ?value?
```

#### Return

Value of the variable

#### Description

The **set** command assigns or “sets” a string. **set** takes one or two arguments.

When using two arguments, **set** assigns the value to the variable. The value can be an integer, string, or expression.

When using one argument, **set** returns the current value of the variable.

#### Example

```
> set a 2
2
> set b hello
hello
> set a
2
```

### 4.1.4 unset

#### Syntax

```
unset variable ?variable? ...
```

#### Return

No return

#### Description

The **unset** command destroys a variable created by **set**. **unset** takes at least one argument.

#### Example

To remove both of the variables we created in the previous section, type

```
unset a b
```

### 4.1.5 **expr**

#### **Syntax**

```
expr argument ?argument? ...
```

#### **Return**

String of the expression's value

#### **Description**

The **expr** command evaluates an **expression**, which is a combination of values (called operands) and operators. Specifically, **expr** concatenates an argument, evaluates the result as a Tcl expression, and returns the value.

#### **Example**

```
> expr 6.7 + 5.5  
12.2
```

### 4.1.6 **incr**

#### **Syntax**

```
incr variable ?value?
```

#### **Return**

New value of the variable incremented by the specified value

#### **Description**

The **incr** command increments a variable by the supplied value. **incr** takes either one or two arguments, a required variable and an optional incremental value. The incremental value must be a positive or negative integer. If you don't specify a value, Tcl automatically adds one (1) to the variable.

#### **Example**

```
> set x 12  
> incr x 5  
17  
> incr x  
18  
> incr x -7  
11
```



### 4.1.7 `append`

#### Syntax

```
append variable value ?value? ...
```

#### Return

Appended value of the variable

#### Description

The **append** command appends one or more values to a variable, that is they are added to the end of the variable. **append** takes two or more arguments.

The appended values are treated as text. Instead of adding the two integers together as **incr** does, **append** simply treated them as if they were letters.

#### Example

```
> set x 5
5
> append x 6
56
> append x Y
56Y
```

### 4.1.8 `history`

#### Syntax

```
history ?option? ?arg arg ...?
```

#### Return

A listing of previously executed commands

#### Description

The **history** command lets you perform several actions on **events**, which are previously executed commands. In its simplest form, **history** returns a **history list**, a list of these events with an event number assigned to each event.

**NOTE** — By default, only the 20 most recent events are returned, but you can tell history to retain more events.

**history** takes several options that let you perform other functions besides returning the history list, including re-executing and changing a command.

## Example

As we said, the simplest use of **history** is to return the history list, as in the following:

```
> xmyLoadPkg TermAsync
> set x 5
5
> set y 7
7
> history
    1  xmyLoadPkg TermAsync
    2  set x 5
    3  set y 7
    4  history
```

In the following examples, the **redo** option re-executes the second command from the above list, the **change** option replaces the value of the original second command, and the **event** option returns the new value of the second command.

```
> history redo 2
5
> history change "set x 7.7" 2
> history event 2
set x 7.7
```

Lastly, **history** is re-executed to confirm the change and **redo** generates the new value of the variable **x**.

```
> history
    1  xmyLoadPkg TermAsync
    2  set x 7.7
    3  set y 7
    4  history
    5  set x 5
    6  history change "set x 7.7" 2
    7  history event 2
    8  history
> history redo 2
7.7
```

## 4.2 Expressions

As we mentioned in Section 4.1.5, expressions are a combination of values (called operands) and operators. All Tcl expression commands require one or more arguments. **expr** is only one of these commands and is in fact the simplest. For example, **if** requires two arguments, both of which can be expressions: the result from the evaluation of the first is used to determine whether or not to evaluate the second. (See Section 4.5.1 for a discussion of the **if** command.)

### 4.2.1 Operands

Normally, operands are integers or real numbers, and these can be variables or constants. As we've mentioned, variables are set using the **set** command.

Constants are usually decimal (base 10). There are, however, ways to use different number bases. If the first character is a 0 (zero), then the constant is considered to be octal (base 8). If the first two characters are 0x, then the number is considered to be hexadecimal (base 16). For instance, the examples in Table 4-2 are all equal to the decimal constant 422.

**Table 4-2.** Tcl Number Base Example

Constant	Base
422	decimal
0646	octal
0x1A6	hexadecimal

For floating-point numbers, Tcl accepts most of the forms defined for ANSI C with the exception of the f, F, l, and L suffixes. Figure 4-1 shows valid examples of floating-point numbers.

5.3  
6.28e+7  
7E5  
9.

**Figure 4-1.** Floating-Point Number Examples

## 4.2.2 Operators

Tcl supports arithmetic, relational, logical, bitwise, and choice operators similar to those used in ANSI C expressions. As with ANSI C, Tcl treats a zero value (such as for a relational or logical operator) as false and anything else as true. Tcl uses 1 for true and 0 for false.

In each of the following sections, the operators are listed in the order of precedence. Additionally, the types of operators are listed in the general order of precedence. The exact order of precedence is discussed in Section [4.2.2.6](#).

### 4.2.2.1 Arithmetic Operators

Tcl supports the arithmetic operators -, +, \*, /, and %. The - operator can be used for two operations:

- For negation, as in  $-(7*\$x)$
- For subtraction, as in  $7-5$

Table [4-3](#) lists the Tcl arithmetic operators.

**Table 4-3.** Tcl Arithmetic Operators

Syntax	Results
-x	Return the negative of $x$ .
x*y	Multiply $x$ and $y$ .
x/y	Divide $x$ by $y$ . If both operands are integers, the result is truncated to an integer.
x%y	Remainder when dividing $x$ by $y$ . Both operands must be integers. This is called the modulus operator.
x+y	Add $x$ and $y$ .
x-y	Subtract $y$ from $x$ .

#### 4.2.2.2 Relational Operators

Tcl supports the relational operators `<`, `>`, `<=`, and `>=`, which are used to compare two values. If the operands meet the conditions, the operators produce a true (1) result. If the operands do not meet the conditions, the operators produce a false (0) result. [Table 4-3](#) lists the Tcl relational operators.

**Table 4-4.** Tcl Relational Operators

Syntax	Description	Results
<code>x&lt;y</code>	Less than	1 if <i>x</i> is less than <i>y</i> , else 0
<code>x&gt;y</code>	Greater than	1 if <i>x</i> is greater than <i>y</i> , else 0
<code>x&lt;=y</code>	Less than or equal	1 if <i>x</i> is less than or equal to <i>y</i> , else 0
<code>x&gt;=y</code>	Greater than or equal	1 if <i>x</i> is greater than or equal to <i>y</i> , else 0
<code>x==y</code>	Equal to	1 if <i>x</i> is equal to <i>y</i> , else 0
<code>x!=y</code>	Not equal to	1 if <i>x</i> is not equal to <i>y</i> , else 0

#### 4.2.2.3 Logical Operators

Tcl supports the logical operators `!`, `&&`, and `||`, which are used to combine the results of relational operators, such as

```
($x > 6) || ($x < 13)
```

[Table 4-3](#) lists the Tcl logical operators.

**Table 4-5.** Tcl Logical Operators

Syntax	Description	Results
<code>!x</code>	Logical NOT of <i>x</i> .	1 if <i>x</i> is a zero, else 0.
<code>x&amp;&amp; y</code>	Logical AND of <i>x</i> and <i>y</i> .	1 if <i>x</i> and <i>y</i> are non-zero, else 0.
<code>x  y</code>	Logical OR of <i>x</i> and <i>y</i> .	1 if either <i>x</i> or <i>y</i> is non-zero, else 0.

#### 4.2.2.4 Bitwise Operators

Tcl supports the logical operators `~`, `<<`, `>>`, `&`, `^`, and `|`, which manipulate the individual bits of integers. [Table 4-3](#) lists the Tcl bitwise operators.

**Table 4-6.** Tcl Bitwise Operators

Syntax	Description	Results
<code>~x</code>	Bitwise complement (ones complement) of <i>x</i> .	The result is bits that are the opposite of those in the operand: 1's replace 0's and 0's replace 1's.
<code>x&lt;&lt;y</code>	Left-shift <i>x</i> by <i>y</i> bits.	0's are shifted into the low-order bits.
<code>x&gt;&gt;y</code>	Arithmetic right-shift <i>x</i> by <i>y</i> bits.	0's are shifted in for positive numbers and 1's are shifted in for negative number.
<code>x&amp;y</code>	Bitwise AND of <i>x</i> and <i>y</i> .	Each bit of the result is generated by applying the AND function to the corresponding bits of the <i>x</i> and <i>y</i> operands.
<code>x^y</code>	Bitwise exclusive OR of <i>x</i> and <i>y</i> .	Each bit of the result is generated by applying the exclusive OR function to the corresponding bits of the <i>x</i> and <i>y</i> operands.
<code>x y</code>	Bitwise OR of <i>x</i> and <i>y</i> .	Each bit of the result is generated by applying the OR function to the corresponding bits of the <i>x</i> and <i>y</i> operands.

#### 4.2.2.5 Choice Operator

Tcl has only one choice operator, `?`, which lets you select one of two results. The choice operator takes three operands and has the syntax.

`x?y:z`

If **x** is true, then **y**. If **x** is false, then **z**.

The first operand is evaluated. If the solution is true (non-zero), then the operand following the `?` is evaluated and becomes the result of the expression; if the solution is zero (false), the second operand is evaluated and becomes the result.

#### 4.2.2.6 Precedence

Table 4-7 lists all of the Tcl-supported operators described in the previous subsections; the horizontal lines separate the operators into groups with the same precedence. This table also lists the operand type (integer, floating-point, and string) for each operator.

**Table 4-7.** Tcl Operator Precedence

Operator	Operand Types
-x	integer, floating-point
!x	integer, floating-point
~x	integer
x*y	integer, floating-point
x/y	integer, floating-point
x%y	integer
x+y	integer, floating-point
x-y	integer, floating-point
x<<y	integer
x>>y	integer
x<y	integer, floating-point, string
x>y	integer, floating-point, string
x<=y	integer, floating-point, string
x>=y	integer, floating-point, string
x==y	integer, floating-point, string
x!=y	integer, floating-point, string
x&y	integer
x^y	integer
x y	integer
x&&y	integer, floating-point
x  y	integer, floating-point
x?y:z	x: integer, floating-point

Operators with higher precedence appear above operators with lower precedence. For example,

```
expr (11/3<=4)
```

yields the result true (1) since the / operator has a higher precedence than the <= operator.

You can use parenthesis to indicate how you want operators to be evaluated; whatever is in the parenthesis will be evaluated first. For example,

```
expr (7*(5+4))
```

yields 63, but

```
expr (7*5+4)
```

yields 39.

Operators with the same precedence level are grouped from left to right. For example  $7+5-3$  and  $(7+5)-3$  are equal; both evaluate to 9.



### 4.2.3 Mathematical Functions

Tcl supports many mathematical functions, such as *sin* (the trigonometric [trig] sine function) and *sqrt* (square root). These functions can be used as arguments for expressions and are invoked using standard functional notation, as in the following examples:

```
expr 3*tan($a)
expr sqrt($x) + $b
```

Table 4-8 lists the Tcl-supported trigonometric functions.

**NOTE** — All arguments for trigonometric functions are expressed in radians.

**Table 4-8.** Tcl Trig Functions

Function	Description
acos(x)	Arc cosine of $x$ , in the range $0 \leq x \leq \pi$ .
asin(x)	Arc sine of $x$ , in the range $-\pi/2 \leq x \leq \pi/2$ .
atan(x)	Arc tangent of $x$ , in the range $-\pi/2 \leq x \leq \pi/2$ .
atan2(x,y)	Arc tangent of $x/y$ , in the range $-\pi/2 \leq x \leq \pi/2$ .
cos(x)	Cosine of $x$ .
cosh(x)	Hyperbolic cosine of $x$ .
sin(x)	Sine of $x$ .
sinh(x)	Hyperbolic sine of $x$ .
tan(x)	Tangent of $x$ .
tanh(x)	Hyperbolic tangent of $x$ .

Table 4-9 lists the standard Tcl-supported math functions.

**Table 4-9.** Tcl Math Functions

Function	Description
abs(x)	Absolute value of $x$ .
ceil(x)	Smallest integer not less than $x$ .
double(x)	Real value equal to the integer $x$ .
exp(x)	$e$ raised to the $x$ th power, i.e., $e^x$ .
floor(x)	Largest integer not greater than $x$ .
fmod(x,y)	Floating-point remainder of $x/y$ .
hypot(x)	Square root of $(x^2 + y^2)$ . This is the hypotenuse of a right triangle.
int(x)	Integer from truncating $x$ .
log(x)	Natural logarithm of $x$ .
log10(x)	Base 10 logarithm of $x$ .
pow(x,y)	$x$ raised to the $y$ th power, i.e., $x^y$ .
round(x)	Integer from rounding $x$ .
sqrt(x)	Square root of $x$ .

#### 4.2.4 Conversion

When you use operands of different types, Tcl converts them to the same type, e.g., if one is an integer and the other is floating-point, both are converted to floating-point.

## 4.3 Tcl Syntax

This section describes the Tcl syntax, the rules that determine how commands are used.

### 4.3.1 Substitution

Tcl provides three forms of substitution: variable, command, and backslash. Each substitution causes some of the original characters of a word to be replaced with another value.

#### 4.3.1.1 Variable

Variable substitution using “\$” lets you use the value of a variable in a command; characters following the \$ are treated as a variable. A basic example would be to type

```
set c $a
```

The \$ causes the Tcl interpreter to perform the substitution, assigning the current value of the variable *a* to the variable *c*.

A more illustrative example would be

```
> set a 6  
> expr $a+3  
9
```

where the variable *a* is assigned the value 6, which, using the **expr** command, is added to 3.

You can have variable substitutions anywhere in an argument, such as

```
> set a 6  
> expr $a*$a  
36
```

In this example, two substitutions occurred within the same argument, i.e., 6 times 6.

#### 4.3.1.2 Command

Tcl also lets you use the result of a command as an argument to another command. For this, you put square brackets around a command or script excerpt. For example, type

```
> set a 6  
> set c [expr $a/2]  
3
```

Everything inside the square brackets is evaluated by Tcl as a separate command. In this case, the command happens to be **expr**. The value of *a* is divided by 2 and this new value is assigned to *c*. Square brackets can be nested. Try entering

```
set e [expr $c*[expr $a+4]]
```

Given the values of *a* and *c* from the previous example (6 and 3, respectively), *e* would assume the value 30 (i.e.,  $4*(6+4)$ ).

#### 4.3.1.3 Backslash

The backslash character overrides the special meaning of the following character, such as a \$, a space, or a left bracket ([); the character is interpreted literally and not according to its Tcl-based characteristics. If you typed

```
> set d \$a  
$a
```

the variable *d* is literally set to the characters \$a and not 6, assuming the value for *a* from the previous examples.

Tcl does not allow embedded spaces in words, but the backslash lets you use spaces in arguments, such as

```
> set x this\ string\ uses\ embedded\ spaces  
this string uses embedded spaces
```

A backslash suppresses only the Tcl interpretation of the character immediately following it. In this example

```
> set x 6.5; set y \$$x  
$6.5
```

the first dollar sign is passed as a literal character while the second is used for variable substitution.

The backslash can also be used to insert special characters and functions, including all sequences defined for ANSI C, such as `\t` for a tab. [Table 4-10](#) lists all of the Tcl-supported backslash sequences.

**Table 4-10.** Tcl Backslash Sequences

<b>Backslash Sequence</b>	<b>Replaced By</b>
<code>\a</code>	Audible alert (0x7)
<code>\b</code>	Backspace (0x8)
<code>\f</code>	Form feed (0xc)
<code>\n</code>	Newline (0xa)
<code>\r</code>	Carriage return (0xd)
<code>\t</code>	Tab (0x9)
<code>\v</code>	Vertical tab (0xb)
<code>\ddd</code>	Octal value
<code>\xhh</code>	Hex value from hh
<code>\{space}</code>	A single space character

## 4.3.2 Quoting

Much like the backslash character, quoting suppresses the effect of special characters (white spaces, new-lines, semicolons). While only the character following a backslash is suppressed, everything quoted is suppressed, such as when you want an argument to include embedded spaces.

Tcl lets you use two forms of quoting: double quotes and braces. The quote character must be the first character of the quoted argument. The quote character is stripped off when the argument is passed to the interpreter.

### 4.3.2.1 Using Double Quotes

When using double quotes, everything from the first double quote to the closing double quote is interpreted as one command argument; all spaces, tabs, newlines, and semicolons in the argument lose their special meaning. Dollar signs and brackets are not affected by double quotes. You can retype the second example in Section [4.3.1.3](#) without using a backslash in the following way.

```
> set x "this string uses embedded spaces"
this string uses embedded spaces
```

Similarly, you could type

```
> set d "$a"
6
```

assuming *\$a* is still set to the value from Section [4.3.1.2](#).

A slightly more elaborate example is

```
> set x 3.1
> set test "x is $x\n$x squared is [expr $x*$x]"
x is 3.1
3.1 squared is 9.61
```

**NOTE** — This can also be written

```
set x 3.1
set test "x is $x
$x squared is [expr $x*$x]"
```

with the newline replacing the newline character (*\n*).

#### 4.3.2.2 Using Braces

You can also use the braces to suppress special characters. While double quotes disable only word and command separators (e.g., white spaces, newlines, semi-colons), braces disable almost all special characters. For example, the last example for double quotes rewritten using braces would yield the following:

```
> set x 3.1
> set test {x is $x\n$x squared is [expr $x*$x]}
x is $x\n$x squared is [expr $x*$x]
```

Because the braces suppress the variable substitution for the \$, the characters `$x\n$x` and `$x*$x` are interpreted literally.

**NOTE** — The next example uses the **while** command. Briefly, the syntax for **while** is

```
while test while_body
```

**while** evaluates *test*. If the result is zero, execution of the **while** loop is terminated and the next command in the Tcl script is executed. If the result is non-zero, **while** executes the *while\_body* script, re-evaluates *test*, and continues until the *test* result is zero. (See Section 4.5.2.1 for a further discussion on the **while** command.)

A primary use of braces is to defer evaluation. Normally, the Tcl parser immediately processes special characters. Using deferred evaluation, special characters are passed as part of the argument to a command procedure, which then processes the characters. Consider the following script that calculates the square of the first five integers.

```
> set x 1
> while {$x < 5} {
    set square [expr $x*$x]
    set x [expr $x+1]
}
```

**NOTE** — When using braces, the **xmytclsh** prompt does not appear until you enter the closing brace.

The braces enclose the **test** and **while\_body** parts to defer substitution. The **test** expression `$x<5` is evaluated at the beginning of each iteration and is used to determine whether or not to terminate the **while** loop. This way, the substitution is done anew each time **while** evaluates the script. If you had typed

```
while $x<5
```

the **test** expression would have been evaluated once as a constant expression, i.e., `1<5`, and the loop would have executed forever.

### 4.3.3 Comments

You can add comments to a script by entering a pound sign (#) as the first non-blank character of a line; all characters following the # until a newline will be treated as a comment. If the # appears anywhere other than as the first non-blank character of a line, it will be treated as an ordinary character unless it is immediately preceded by a semicolon (;).

```
# This is a correct comment
> set x 3 # This is not a comment
> set x 3; # This is a correct comment
```

In the first example, the # appears in the first non-blank character, so this is a valid comment. In the second example, the # appears in the middle of the command and is considered an argument for the **set** command. (This would generate an error since the **set** command now has too many arguments.) In the last example, the semicolon (;) terminates the **set** command, and the # is therefore the first non-blank character following the semicolon.



## 4.4 Lists and Arrays

As we said in Section 4.1.2, the only Tcl data type is the string. However, Tcl also provides facilities for handling collections of such data.

A Tcl list is an ordered collection of components of a string, which are called **elements**. Syntactically, it is just a string containing one or more fields (such as words, integers, and file names) separated by white spaces or tabs.

**NOTE** — When working with a list, an index of 0 refers to the first element of the list, 1 refers to the second element, etc. An empty string is generated when the index is outside the range of the list.

An **array** is similar to a list in that both are collections of elements. However, where a list is a string of elements, an array's elements are variables, each with its own name and value. Each variable can only be referenced with the array name.

## 4.4.1 Creating Lists

As we said, a Tcl list is an ordered collection of string elements.

The simplest way to create a list is to use the **set** command. This is fine if you're creating simple lists. To create more complex lists, Tcl provides two commands, **concat** and **list**. These two commands are similar, but they differ in the how they combine the arguments into a list.

### 4.4.1.1 Using the set Command

The simplest way to create a list is to use the **set** command:

```
> set x {a b c d}
a b c d
```

This creates a list with four elements, a, b, c, and d.

Usually, you will use braces to enclose the elements of a list; this passes the entire list to the command as a single argument. Braces let you enclose list element to permit spaces. Backslashes let you enter special characters in a list. You can also use braces to nest lists within lists:

```
set x {a b {c d e} f { }}
```

In this case, you created a list with five elements:

- The character a
- The character b
- A sublist containing the characters c, d, and e
- The character f
- An empty list.

**NOTE** — When using braces to enclose elements of a list, the braces will not appear unless you use backslash substitution to insert braces (or other special characters) into the list.

#### 4.4.1.2 concat

##### Syntax

```
concat value_1 value_2 ?value_3? ...
```

##### Return

Concatenated list

##### Description

The **concat** command takes any number of arguments and creates one large list. Each argument is considered a list, whether it is an individual element or an existing list. If you do not supply any arguments, **concat** returns an empty string.

##### Example

```
> concat {a b c} d {e f} g h  
a b c d e f g h
```

Since each argument is considered a list, if an argument contains a list, the list becomes an individual element of the new list

```
> concat {a {b c}} d {e f} g h  
a {b c} d e f g h
```

You can use double-quotes and **set** to achieve the same affect.

```
> set x {1 2 3}  
> set y {4 5}  
> set z {7 8 9}  
> set w [concat $x $y $z]  
1 2 3 4 5 6 7 8 9  
> set w "$x $y $z"  
1 2 3 4 5 6 7 8 9
```

#### 4.4.1.3 list

##### Syntax

```
list value_1 value_2 ?value_3? ...
```

##### Return

Concatenated list

##### Description

The **list** command takes any number of arguments and creates one large list. Unlike **concat**, **list** retains the integrity of elements in the argument so that they remain discrete elements in the resulting list. If you do not supply any arguments, **list** returns an empty string.

##### Example

```
> list {a b c} d {e f} g h  
{a b c} d {e f} g h
```

The resulting list contains five elements, compared to **concat**, which would create a list with eight elements.

```
> concat {a b c} d {e f} g h  
a b c d e f g h
```

You can use **concat** and **list** as part of the argument for another expression, such as using **set** to assign a list to a variable:

```
> set x [concat {a b c} d {e f} g h]  
a b c d e f g h  
> set y [list {a b c} d {e f} g h]  
{a b c} d {e f} g h
```

#### 4.4.1.4 llength

##### Syntax

```
llength list
```

##### Return

Number of elements in a list

##### Description

The **llength** command calculates the number of elements in a list. **llength** takes only one argument, the list itself.

##### Example

```
> llength {{a b c} d {e f} g h}
5
> llength {a b {c d e}}
3
> llength a
1
> llength { }
0
```

## 4.4.2 Extracting Elements from a List - `lindex`

### Syntax

```
lindex list index
```

### Return

List element

### Description

The **`lindex`** command extracts elements from a list. Each element corresponds to an entered index. The list index begins at 0.

### Example

To extract the second element in a list, type

```
> lindex {a b c d} 1  
b
```

To extract the fourth element in a list, type

```
> lindex {a b {c d e} f} 3  
f
```

### 4.4.3 Modifying Lists

Tcl provides several commands that let you modify lists.

#### 4.4.3.1 lappend

##### Syntax

```
lappend variable value ?value? ...
```

##### Return

An appended list

##### Description

The **lappend** command lets you append new elements to a list assigned to a variable. Each additional argument is appended to the end of the variable's list as a new list element.

**lappend** enforces proper list structure and is implemented so as to avoid string copies, which helps in performance when working with large lists. This can simplify creating lists.

##### Example

```
> set x {a {b c d} e}
a {b c d} e
> lappend x X {Y Z} WW
{a {b c d} e} X {Y Z} WW
```

Both of the following would create the same list, but using **lappend** is more efficient if one of the lists is very large.

```
> lappend x $a $b $c
> set x "$x [list $a $b $c]"
```

#### 4.4.3.2 linsert

##### Syntax

```
linsert list index value ?value? ...
```

##### Return

A list containing inserted elements

##### Description

The **linsert** command lets you form a new list by inserting new elements into an existing list.

**linsert** generates a new list by inserting the new elements just before the element specified by the index.

##### Example

```
> set x {{a b c} d {e f}}
{a b c} d {e f}

> linsert $x 1 X {Y Z}
{a b c} X {Y Z} d {e f}

> linsert $x 0 X {Y Z}
X {Y Z} {a b c} d {e f}

> linsert $x 5 X {Y Z}
{a b c} d {e f} X {Y Z}
```

In the first example, the index is 1, so the new elements were inserted after the first element in the old list. In the second example, the new elements were inserted at the beginning of the old list. In the third example, the index was greater than the number of elements in the original list, so the new elements were inserted at the end of the list.



### 4.4.3.3 lreplace

#### Syntax

```
lreplace list index_1 index_2 ?value? ?value? ...
```

#### Return

A list containing deleted or replaced elements

#### Description

The **lreplace** command lets you delete elements from a list and lets you optionally add new elements in their place.

The *index\_1* and *index\_2* arguments are, respectively, the indices of the first and last elements to be deleted. If you specify any additional arguments, they are inserted in place of the elements you deleted.

#### Example

In this first example, only three arguments are specified, and the third and fourth elements are deleted from a list and the new list assigned to the variable *x*.

```
> set x [lreplace {a {b c} {d e f} g h {i j} k} 2 3]  
a {b c} h {i j} k
```

In this second example, we take the list assigned to the variable *x* in the previous example, replace the third, fourth, and fifth elements with new elements, and assigned this list to the variable *y*.

```
> set y [lreplace $x 2 4 W {X Y} Z]  
a {b c} W {X Y} Z
```

#### 4.4.3.4 lrange

##### Syntax

```
lrange list index_1 index_2
```

##### Return

List containing extracted elements

##### Description

The **lrange** command lets you extract a range of elements from a list.

The resulting list consists of the elements that lie inclusively between the two indices.

##### Example

Let's take the list assigned from the last example. In the first example, we simply extract and display the third, fourth, and fifth elements from the list. In the second example, we extract the first and second elements.

```
> lrange $y 2 4  
w {x y} z  
> set z [lrange $y 0 1]  
a {b c}
```

#### 4.4.4 Searching Lists - lsearch

##### Syntax

```
lsearch ?mode? list pattern
```

##### Return

Index number

##### Description

The **lsearch** command searches a list for an element with a particular value.

**lsearch** returns the index of the first element in the list that matches the pattern, or -1 if no element matched the pattern.

The three optional mode arguments, if used, appear before the list argument and determine how the elements of the list are matched against the pattern:

- exact**           The list element must exactly match the pattern.
- glob**            Each list element is matched against a glob-style pattern that follows the rules for the **string match** command as described in Appendix [A.54](#). This is the default mode.
- regexp**          Each list element is matched against a regular expression pattern that follows the rules for the **regexp** command as described in Appendix [A.45](#).

##### Example

```
> set x {Prufrock Ken Regis Salinger}
> lsearch $x Prufrock
0
> lsearch $x S
-1
> lsearch $x S*
3
> lsearch $x Updike
-1
> lsearch -exact $x Regis
2
```

## 4.4.5 Sorting Lists

### Syntax

```
lsort ?options? list
```

### Return

Sorted list

### Description

The **lsort** command sorts a list. **lsort** takes one or more arguments.

By default, **lsort** sorts a list in increasing lexicographical order, that is numbers are treated as letters and the list is sorted alphabetically. **lsort** looks at the relative position of each character of each element and sorts accordingly.

**lsort** support several options that let you control how and what to sort, including the two following examples:

**-decreasing** Sort the list in decreasing order.

```
> lsort -decreasing {Prufrock Ken Klaatu Salinger}  
Salinger Prufrock Klaatu Ken
```

**-integer** The elements are treated as integers and sorted according to integer value:

```
> lsort -integer {12 1 3 103 9}  
1 3 9 12 103
```

You can specify your own sorting functions using the **-command** option. See the **lsort** manpage on page A-57 for an explanation of the **-command** option.

### Example

```
> lsort {Prufrock Ken Klaatu Salinger}  
Ken Klaatu Prufrock Salinger  
> lsort {12 1 3 103 9}  
1 103 12 3 9
```

In both examples, **lsort** first sorted the elements according to the first character of each element, then by the second character, and so on. Therefore, rather than returning

```
1 12 103 3 9
```

for the second example, which we could expect when sorting numbers, **lsort** first sorted by the first character, found three elements beginning with 1, and then sorted these three elements according the second character of each element.

## 4.4.6 Converting Between Strings and Lists

Tcl provides the **split** and **join** commands for converting lists to strings and strings to lists.

### 4.4.6.1 split

#### Description

```
split string ?split_character? ...
```

#### Return

A list created from a string.

#### Description

**split** breaks up the pieces of the string into elements of a list at the *split characters*. There can be one or more split characters. This lets you process each element of the list independently.

If the split character appears at the beginning of a string, **split** generates an empty element. Empty elements would also be generated if there were consecutive split characters or if the split characters appeared at the end of the string.

You can specify several split characters; the order of the split characters doesn't matter.

If you specify an empty string as the split characters, each character of the string becomes a separate list element separated by an empty element.

#### Example

To work on each element of a date or UNIX pathname, both of which are usually separated by slashes, type:

```
> set x 5/16/95
> set y /usr/bin/pwd
> split $x /
5 16 95
> split $y /
{} usr bin pwd
> split "Tom Dick Harry" {}
T o m { } D i c k { } H a r r y
```

Remember, the order of the split characters doesn't matter:

```
> split 12xy356y7 xy
12 { } 356 7
```

One of each of the split characters appeared between 12 and 356, so **split** generated an empty element.

#### 4.4.6.2 join

##### Syntax

```
join list separator
```

##### Return

A string created from a list.

##### Example

The **join** command creates a string from list elements. This is the opposite function of **split**. **join** concatenates the list elements with the separator string between each pair of elements. You can enter any number of characters for the separator string. If the list contains an empty element, the separator string replaces the empty element.

You can use an operator as the separator string. You can then generate a Tcl expression when you join the list elements.

##### Example

```
> join { {} usr bin pwd} /  
/usr/bin/pwd  
  
> set x {4 9 25}  
4 9 25  
> set y [sqrt([join $x *])]  
30
```

#### 4.4.7 Arrays

An array is also a collection of elements, but an array's elements are variables, each with its own name and value. Each variable can only be referenced with the array name by using the syntax

```
arrayname(elementname)
```

A Tcl array is usually known as an “associative” array, since its element names can be any arbitrary strings.

For example, to assign a value to the element *charlie* in the array *pet*, type

```
> set pet(charlie) snoopy
```

To add two more elements into the array, you can do the same

```
> set pet(alice) mimi  
> set pet(tom) tequila
```

Tcl provides a built-in command, **array**, for obtaining information on an array. Now type

```
> array size pet  
3
```

**array** command takes as its first argument a keyword, indicating the kind of information requested. Subsequent arguments would depend on the keyword. In this example, we queried the size of the array *pet*.

Another often used query is *names*, which returns a list containing the names of all the elements in the array. Try typing

```
> array names pet  
tom charlie alice
```

## 4.5 Control Flows

The Tcl commands for controlling the execution flow of a script are similar to those used by ANSI C and `csh`.

### 4.5.1 if

#### Syntax

```
if expr body
if expr1 then body1 elseif expr2 then body2 ... else bodyn
```

#### Return

Result of conditionally executed body

#### Description

The most basic Tcl control command is **if**, which in its simplest form takes only two arguments `expr` ( `B_____` ) and `body` (a block of Tcl code). When `expr` evaluates true (non-zero) `body` is executed, otherwise control passes to the Tcl statement following `body`

```
> set x -5
-5
> if { $x < 0 } {
    set x 0
}
0
```

If the first line had been

```
set x 5
```

the expression `$x < 0` would have been false and `body` (`{ set x 0 }`) would not be executed. After you will want to execute different code when `expr` evaluates false and will use the second form of the `if` statement.

```
> set x 5
5
> if { $x < 0 } {
    set x 0 } else {
    set x [expr $x+1]
}
6
```



Using the **elseif** keyword in the second form of it you can create chained conditionals as in the next example. **if** checks to see if the variable *x* is less than zero. If it isn't, the first **elseif** clause checks to see if *x* is equal to zero, and the second checks to see if *x* is greater than zero.

**NOTE** — The **then** and **else** arguments are considered optional “noise words.” A primary function is to help in readability. **if** will execute without them. However, if you do not include an **else** clause and no tests succeed, **if** will return an empty string.

### Example

```
> set x 5
> if {$x < 0 } then {
    set x [expr $x + 1]
} elseif {$x == 0} {
    echo x equals zero
} elseif {$x > 0} {
    set x [expr $x - 1]
}
4
```

This example is equivalent to the prior example except for the omission of the second **elseif** clause, which is redundant.

```
> set x 5
> if {$x < 0 } then {
    set x [expr $x + 1]
} elseif {$x == 0} {
    echo x equals zero
} else {
    set x [expr $x - 1]
}
4
```

## 4.5.2 Looping Commands

You can use the **while**, **for**, and **foreach** commands for looping, executing nested scripts over and over. **while** and **for** are similar to the corresponding C statements; **foreach** is similar to the corresponding feature of the csh shell. The setup and termination criteria are different for each command.

### 4.5.2.1 while

#### Syntax

```
while test body
```

#### Return

Result of conditionally executed body

#### Description

**while** is similar to **if** in that it evaluates a test expression and executes a body if the result is true (non-zero). Unlike **if**, **while** repeats the process until the expression evaluates to zero, at which point **while** terminates and returns an empty string.

#### Example

The following script creates a list containing, in decreasing order, the squares of the first five non-zero integers:

```
> set x 5
> set y ""
> while {$x > 0} {
    lappend y [expr $x * $x]
    incr x -1
}
> set y
25 16 9 4 1
```

In the body you must include code that modifies the test expression, otherwise it will never evaluate to zero. This reinitialization script is evaluated after the loop body is executed. If we start with *x* set to a negative number, we would rewrite the script like this:

```
> set x -5
> set y ""
> while {$x < 0} {
    lappend y [expr $x * $x]
    incr x
}
> set y
25 16 9 4 1
```

#### 4.5.2.2 for

##### Syntax

```
for start test next body
```

##### Return

Result of conditionally executed *body*

##### Description

Like **while**, **for** continues processing until a test expression evaluates to zero. **for** loop execution begins when **start**, which typically initializes variables is executed. When test is evaluated and if true **body** is executed, otherwise the **for** command terminates. After each execution of **body** next which typically modifies **body**, is executed. Test is evaluated again to determine if the for command should continue execution or terminate.

A script you write using **for** can also be written using **while**, but **for** lets you place all of the control code on one line. This aids readability and debugging.

##### Example

The original script for generating the squares of the first five non-zero integers can be rewritten using **for** as follows:

```
> set y ""
> for {set x 5} {$x > 0} {incr x -1} {
    lappend y [expr $x * $x]
}
25 16 9 4 1
```

### 4.5.2.3 foreach

#### Syntax

```
foreach var_name list body
```

#### Return

Result of conditionally executed body

#### Description

Whereas **while** and **for** let you create loops that act on any variable, including lists, **foreach** is specifically designed to work on lists.

**foreach** executes body once for each element of the list, e.g., if there are five elements in a list, body is executed five times, once for each element in the list. Before each execution, the current list item is assigned to var-name.

#### Example

The script for creating a list containing, in decreasing order, the squares of the first five non-zero integers can be rewritten as follows:

```
> set x [list 1 2 3 4 5]
> set y ""
> foreach i $x {
    set y [linsert $y 0 [expr $i * $i]]
}
> set y
25 16 9 4 1
```

With a slight editing, we can change this script so that the generated list will contain the squares of the integers in increasing order.

```
> set x [list 1 2 3 4 5]
> set z ""
> foreach i $x {
    lappend z [expr $i * $i]
}
> set z
1 4 9 16 25
```

### 4.5.3 Looping Control

You can use the **break** and **continue** commands to abort part or all of a looping command. **break** and **continue** are similar to the corresponding C statements.

#### 4.5.3.1 break

**break** immediately terminates the innermost enclosing looping command. For example, suppose the list in the examples above contained the first 10 non-zero integers but you want to generate a list that contains only the squares of the first six non-zero integers. You could then rewrite the script as follows, using **break** as the **then** script for an **if** command:

```
> set x [list 1 2 3 4 5 6 7 8 9 10]
> set z ""
> foreach i $x {
    if {$i > 6} break
    lappend z [expr $i * $i]
}
> set z
1 4 9 16 25
```

This second example rewrites the first example from Section 4.5.2.1, terminating the script when the variable *x* equals 3.

```
> set x 5
> set y ""
> while {$x > 0} {
    if {$x == 3} break
    lappend y [expr $x * $x]
    incr x -1
}
> set z
25 16
```

#### 4.5.3.2 continue

**continue** terminates only the current iteration of the innermost loop. This time, instead of generating the squares of only the first five non-zero integers, we could write a script like the following to omit the square of the sixth integer:

```
> set x [list 1 2 3 4 5 6 7 8 9 10]
> set z ""
> foreach i $x {
    if {$i == 6} continue
    lappend z [expr $i * $i]
}
> set z
1 4 9 16 25 49 64 81 100
```

When using **while**, Tcl skips out of the body and reevaluates the termination expression. When using **for**, next is executed before re-evaluating test. This example rewrites the example from Section [4.5.2.2](#), skipping the square of the third integer:

```
> set y ""
> for {set x 5} {$x > 0} {incr x -1} {
    if {$x == 3} continue
    lappend y [expr $x * $x]
}
> set y
25 16 4 1
```

## 4.5.4 switch

### Syntax

```
switch ?options? string {pattern body ?pattern body? ...}  
switch ?options? string pattern body ?pattern body? ...
```

### Return

Result of conditionally executed body

### Description

The **switch** command matches a test string against one or more patterns and executes a corresponding body. Essentially, **switch** is a compact way of writing an **if** command with many **elseif** clauses.

The string argument is usually the contents of a variable, is the value to be matched. Each pattern and body form an argument pair. **switch** iterates through each argument pair until a pattern matches the string, at which time it executes the corresponding body. If **switch** finds no matches, it returns an empty string.

**NOTE** — You can avoid generating an empty string by using *default* as the last pattern, which matches any value. The corresponding body will be executed if there are no other matches.

The options are **-glob**, **-exact**, and **-regexp**, the same as for **lsearch**. (See Section 4.4.4.) The default is **-glob**.

### Example

Both of the following examples do the same thing: it generates the natural logarithm of *\$a* if *\$x* matches *z1*, the natural logarithm of *\$b* if *\$x* matches *z2*, the natural logarithm of *\$c* if *\$x* matches *z3*, or an empty string if there is no match.

```
switch $x {z1 {log $a} z2 {log $b} z3 {log $c}}  
switch $x z1 {log $a} z2 {log $b} z3 {log $c}
```

The first form treats each pattern/body pair as an element in a list; the second form treats them as separate arguments. Each form has its advantages

The first form lets you spread the patterns and bodies across multiple lines like this:

```
switch $x {  
    z1 {log $a}  
    z2 {log $b}  
    z3 {log $c}  
}
```

The outer braces prevent the newlines from being treated as command separators.

This is especially advantageous when there are many pattern body pairs.

When using the second form you must use backslash-newlines like this:

```
switch $x \  
    z1 {log $a} \  
    z2 {log $b} \  
    z3 {log $c}
```

The major advantage of the second form is that it's easier to perform substitutions on the pattern arguments.

If you enter "-" for a body, **switch** will execute the body of the following pattern. This means several patterns may execute the same body:

```
switch $x {  
    z1 -  
    z2 {log $a}  
    z3 {log $b}  
}
```

In this example, **switch** generates the natural logarithm of  $a$  when  $x$  is  $z1$  or  $z2$  and the natural logarithm of  $b$  when  $x$  is  $z3$ .



## 4.5.5 eval

### Syntax

```
eval argument ?argument? ...
```

### Return

Result of a script

### Description

The **eval** command lets you generate and execute scripts.

**eval** concatenates the arguments, using spaces to separate them, and executes the result as a Tcl script. A major use is for generating commands, saving them to a variable, and executing the variable as a script.

### Example

You might want to use a variable as a counter. From time to time you might want to reset this counter. Each time, you could type the following command:

```
> set counter 0
```

However, you could save this line to a variable, such as

```
> set cmd "set counter 0"
```

and then execute the following when you want to reset the counter:

```
> eval $cmd
```

## 4.6 Tcl Error/Exception Procedures

The Tcl command that manages exceptions is **catch**, which can trap the error so that the script does not abort. Tcl also contains several global variables (Section 4.7.3), **errorCode** and **errorInfo**, that return information resulting from errors.

**NOTE** — In addition to **catch**, there are two more Tcl commands, **error** (see Appendix A.11) and **return** (see Appendix A.48), that are related to exceptions. While these commands do not trap exceptions, they can be used when processing exceptions.

### 4.6.1 catch

#### Syntax

```
catch command ?varName?
```

#### Return

- 0 the script completed normally
- 1 an error occurred
- 2 the **return** command was invoked
- 3 the **break** command was invoked
- 4 the **continue** command was invoked

#### Description

The **catch** command evaluates a command or Tcl script, returning an integer identifying the command's completion status. Instead of aborting, **catch** lets the script continue executing.

If you specify the **varName** argument, the entered variable name assumes the command's return value or error message.

#### Example

```
> catch {expr 2 * (3 + 4)} msg
1
> set msg
unmatched parentheses in expression "2 * (3 + 4"
```

## 4.6.2 Tcl Error Global Variables

### 4.6.2.1 errorCode

#### Syntax

```
set errorCode
```

#### Return

Error information

#### Description

The Tcl **errorCode** global variable returns error information in the form of a list of one or more elements, the first element identifying a general class of errors and all other elements identifying class-dependent information.

#### Example

```
> expr 2 * (3 + 4
unmatched parentheses in expression "2 * (3 + 4"
> set errorCode
NONE
```

**NOTE** — **errorCode** is filled by only a few commands, primarily those for file access functions and child processes.

#### 4.6.2.2 errorInfo

##### Syntax

```
set errorInfo
```

##### Return

Error information

##### Description

The Tcl **errorInfo** global variable returns diagnostic information on the most recent error. When an error occurs, Tcl generates a basic error message. **errorInfo** returns a more elaborate message than what is returned by **errorCode**.

##### Example

```
> expr 2 * (3 + 4
unmatched parentheses in expression "2 * (3 + 4"
> set errorInfo
can't read "unmatched parentheses in expression "2 * (3 + 4"
while executing
"expr 2 * (3 + 4": no such variable
```

Since, in this first example, we are entering the Tcl commands on the command-line, **errorInfo** returns just the reason why an error failed. Often, though, you will save a script and load it using the **source** command. For example, let's assume we've saved the above **expr** command to a file called *script1*.

```
> set x [expr 2 * (3 +4 ]
> source script1
unmatched parentheses in expression "2 * (3 + 4"
> set errorInfo
unmatched parentheses in expression "2 * (3 + 4"
while executing
"expr 2 * (3 + 4"
(file "script1" line 1)
invoked from within
"source script1"
```

Not only does **errorInfo** return the reason why the script failed, but it also returns the name of the script where the error occurred and the line number of the command that caused the failure.

Returning the name of the script where the error occurred can be very important since the error might not occur in the script you load directly, but in one that script loads, such as if we had a script, called *script2*, that contained the following

```
> source script1
```

We would then get the following:

```
> source script2
unmatched parentheses in expression "2 * (3 + 4"
> set errorInfo
unmatched parentheses in expression "2 * (3 + 4"
  while executing
    "expr 2 * (3 + 4"
  invoked from within
    "set x [expr 2 * (3 + 4)..."
  (file "script1" line 1)
  invoked from within
    "source script1"
  (file "script2" line 1)
  invoked from within
    "source script2"
```

## 4.7 Procedures

A Tcl procedure is a script that is used to invoke other Tcl commands. Procedures make it easy for you to package commands so that they can be reused easily.

### 4.7.1 `proc`

#### Syntax

```
proc proc_name argList body
```

#### Description

The Tcl **proc** command can be used to define new Tcl command procedures. Once defined, such procedures can be used in the same manner as other built-in commands. **proc** has the syntax

**proc\_name** can be any name you give the command. **argList** is a list

Try typing

```
proc sum { a b } { return [expr $a+$b] }
```

This example defined a new command “**sum**” that takes 2 arguments and returns their sum. The **proc** command itself takes 3 arguments:

1. The name of the new command you are implementing
2. A list specifying the arguments to the new command
3. A body that is in turn a list of Tcl commands.

By default, all variables used within a procedure are local. You can now use **sum** as a new command

```
> sum 2 3  
5
```

## 4.7.2 return

### Syntax

```
return ?options? ?string?
```

### Description

The **return** command immediately returns (or exits) from a procedure without executing the entire script. If specified, **return** returns the entered *string* value. If *string* is not specified an empty string is returned. In the **sum** procedure we created above, the procedure evaluates the expression [**expr**  $\$a+\$b$ ] and returns the correct value.

**NOTE** — The options for **return** are detailed in Appendix [A.48](#).

## 4.7.3 Local and Global Variables

The variables in a Tcl procedures are called **local variables** because they can only be accessed within the procedure; they're different from the variables created outside any procedure which are global. When the procedure returns, the local variables are deleted. Global variables last forever unless explicitly deleted.

For example, let's use the **sum** procedure we created above to add two numbers:

```
> set x 6  
> set y 8  
> sum $x $y  
48
```

$\$x$  and  $\$y$  are passed to **sum** as the argument list, and the local variables  $a$  and  $b$  are initialized with these values. Since  $\$a$  and  $\$b$  are local variables, they are deleted after the procedure returns, as shown in the following:

```
> set a  
can't read "a": no such variable  
> set b  
can't read "b": no such variable
```

Each invocation of the procedure creates a new set of local variables. You can have a procedure create local variables, but only those local variables corresponding to the arguments will have a value when the procedure starts executing. For example, let's rewrite the **sum** procedure to create a local variable.

```
> proc sum {a b} {  
    set z [expr $a+$b]  
    return $z  
}  
> sum 5 1.2  
6.2  
set z  
can't read "z": no such variable
```

Because *z* is a local variable to the procedure, it can't be accessed outside of the procedure. But what if you want to use a variable from the calling script in the procedure or you want to use a local variable from the procedure in the calling script? To do this, Tcl supports *global variables*.

**Global variables** are variables named outside any procedure.

You use the **global** command to make already created global variables accessible within a procedure and to create new global variables. Take for example, the following procedure, which is used to raise an entered value to a specified power:

```
> proc pwr {a} {  
    global x z  
    set z [expr pow($a,$x)]  
}  
> set x 5  
5  
> pwr 3  
> set z  
243
```

The **global** command above make the global variable *x* accessible within the procedure and created the global variable *z* if it did not already exist. You can change the value of *\$x*, to generate different powers or, as in the following example, to generate the square roots:

```
> set x [expr 1.0/2.0]  
  
> pwr 144  
> set z  
12.0
```



## 4.8 String Manipulation

Tcl supports two pattern matching forms for string manipulation. The first follows the shell file name expansion rules, and is similar to globbing. The second uses regular expressions such as those used for **egrep**.

### 4.8.1 string match

#### Syntax

```
string match pattern string
```

#### Return

1 if **pattern** matches **string**  
0 otherwise

#### Description

**string match** compares the *pattern* with the *string*. If they match, it returns a true response (1). If they don't, it returns a false response (0). This is called the glob-style of matching. *pattern* and *string* must be identical, however, the following special sequences may appear in *pattern*:

- \* Matches any sequence of characters in *string*, including a null string.
- ? Matches any single character in *string*.
- [*chars*] Matches any character in the set given by *chars*. If a sequence of the form *x-y* appears in *chars*, then any character between *x* and *y*, inclusive, will match.
- \\*x* Matches the single character *x*. This provides a way of avoiding the special interpretation of the characters *\*?[]* in *pattern*.

#### Example

In this example, **string match** extracts each element in the list that contains the letter e.

```
> set x {Stella Pollock Picasso Wyeth Lischtenstein}
> set y {}
> foreach i $x {
    if [string match *e* $i] {
        lappend y $i
    }
}
Stella Wyeth Lischtenstein
```

## 4.8.2 `regexp`

### Syntax

```
regexp ?-indices? ?-nocase? ?--? exp string ?matchVar?  
      ?subVar subVar ...?
```

### Return

1 if **exp** matches all or part of **string**  
0 otherwise

### Description

The **regexp** command matches the regular expression **exp** with the **string**. If they match, it returns a true response (1). If they don't, it returns a false response (0).

See Appendix [A.45](#) for information on regular expressions.

**regexp** takes the following switches:

- indices** Changes what is stored in the *MatchVars*. Instead of storing the matching characters from **string**, each variable will contain a list of two decimal strings giving the indices in *string* of the first and last characters in the matching range of characters.
- nocase** Causes upper-case characters in *string* to be treated as lower case during the matching process.
- Marks the end of switches. The argument following this one will be treated as *exp* even if it starts with a **-**.

## 4.9 File Input/Output

Tcl provides **stdio**-style file input/output functions. (See the **stdio** manual page.) The most basic of these is the ability to open and close a file.

**NOTE** — In addition to **open** and **close**, Tcl provides the following commands for performing input/output functions:

- cd
- eof
- file
- flush
- gets
- glob
- puts
- pwd
- read
- seek
- tell

Complete descriptions of these commands can be found in Appendix A.

## 4.9.1 open

### Syntax

```
open fileName ?access? ?permissions?
```

### Return

*fileId* to the open file

### Description

The **open** command opens the file, *fileName*, and returns a unique identifier, *fileId*, which is synonymous to a MYNAH handle. *fileId* takes the form **fileN**, where N is a unique iterated number for each successive *fileId*.

The *access* argument indicates how the file is to be accessed. *access* can be either a string in the form that would be passed to the **fopen** library procedure or a list of POSIX access flags.

By default, a file is opened in read-only mode.

In the first form, *access* can be one of the following values:

- r** Open the file in read-only mode; the file must already exist.
- r+** Open the file in read/write mode; the file must already exist.
- w** Open the file in write-only mode. Truncate it if it exists. If it doesn't exist, create a new file.
- w+** Open the file in read/write mode. Truncate it if it exists. If it doesn't exist, create a new file.
- a** Open the file in write-only mode. The file must already exist, and the file is positioned so that new data is appended to the file.
- a+** Open the file in read/write mode. If the file doesn't exist, create a new empty file. Set the initial access position to the end of the file.

In the second form, *access* consists of a list of any of the following flags.

**NOTE** — One of the flags must be either **RDONLY**, **WRONLY** or **RDWR**.

- RDONLY** Open the file in read-only mode.
  - WRONLY** Open the file in write-only mode.
  - RDWR** Open the file in read/write mode.
  - APPEND** Set the file pointer to the end of the file prior to each write.
  - CREAT** Create the file if it doesn't already exist (without this flag it is an error for the file not to exist).
-

- EXCL** If **CREAT** is specified also, an error is returned if the file already exists.
- NOCTTY** If the file is a terminal device, this flag prevents the file from becoming the controlling terminal of the process.
- NONBLOCK** Prevents the process from blocking while opening the file.
- TRUNC** If the file exists it is truncated to zero length.

The *permissions* argument is used to set the permissions of a file that is created when it is opened, such as when using the *w+* *access* argument. *permissions* defaults to 0644, giving only you read/write permissions for the file but allowing all other users to read the file.

Since a *fileId* works the same as a MYNAH handle, you can use the **set** command to assign the *fileId* to a variable.

### Example

These examples illustrate opening a file using the first *access* form. In the first example, you want to open an existing file with the *fileName Test1* in read/write mode. In the second example, you create and open a file, also in read/write mode, and assign it to a variable.

```
> open Test1 r+
file1

> set x [open Test2 w+]
file2
```

This example illustrates creating and opening a file using the second *access* method. In addition, the *permissions* argument is used so that only you can read or write the file.

```
> set y [open Test3 {RDWR CREAT} 0600]
file3
```

## 4.9.2 close

### Syntax

```
close fileId
```

### Return

An empty string

### Description

The **close** command simply closes a file previously opened using the **open** command. The input **must** be the *fileId* generated by an invocation of the **open** command or a handle assigned to a *fileId*. You **can not** use **close** on a *fileName*; the *fileName* exists only in the operating system and not in Tcl.

### Example

These examples illustrate closing the first two examples of using the **open** command. The first example works directly on the *fileId* and the second works on the variable assigned to a *fileId*.

```
> close file1
```

```
> close $x
```

## 4.10 Using xmytclsh

The **xmytclsh** tool lets you interactively run scripts. **xmytclsh** reads Tcl, TclX, and MYNAH Tcl extensions commands from the standard input or from a file using the **source** command. (See Section 4.11 for information on the **source** command.)

**NOTE** — **xmytclsh** is a re-implementation of the Tcl utility **tclsh**, adding support for the TclX and MYNAH extensions.

You may wish to use **xmytclsh** to verify the examples included in this section or to test your own examples.

**NOTE** — **xmytclsh** is primarily useful for debugging commands as you incorporate them into scripts. It is *not* recommended for running scripts, such as for end-to-end testing, since it does not generate output files.

The syntax is

```
xmytclsh ?-h? ?-d filename? ?-l level?
```

where

- h** Prints this help message
- d *filename*** Turns on tracing. *filename* specifies a trace file (tracing is off unless **-d** is specified). If tracing is on, child script executions will be traced through all processes.
- l *level*** Specifies the level of trace output (off, low, high).

When you type **xmytclsh**, your UNIX system prompt is replaced with a > prompt. You can begin entering your Tcl commands and extensions or import a script.

To exit **xmytclsh** you must use the **exit** or **xmyExit** extensions.

Entering **Control-C** in **xmytclsh** interrupts the currently running command (e.g., **xmySleep 20** or a long-running **while** loop) and gives you a clean > prompt.

See Section 2.3 for information on executing script files.

**NOTE** — The standard Tcl package supports three predefined variables that aid in processing command-line arguments, such as when invoking a Tcl script: **argv0**, **argv**, and **argc**. **argv0** stores the name of the script. **argv** stores the command-line arguments. **argc** stores the number of command line arguments. These variables are not defined for **xmytclsh**.

## 4.11 Importing Scripts Using the `source` Command

As you accumulate scripts, you may find that you are creating lines of script, such as a procedure that can be used in several scripts. Rather than entering these lines in each script, you can save them into files, and then import the files into the new script using the **source** command.

When using **xmytclsh**, you can also use **source** to load and execute an entire script, however, since this does not generate any of the MYNAH reports it is not very useful.

### Syntax

```
source script
```

### Description

The **source** command lets you read in and execute a Tcl script you've saved to a file. For example, you could use an editor to create a file, e.g. *test1*, containing the following lines:

```
> set x {4 9 25}  
> set y [sqrt[join $x *]]
```

You could then type

```
> source test1  
30
```



## 5. Using the Compare Master

The Compare Master feature lets you save expected comparison values to a file, which can be sourced into a script. The actual values that are encountered when the script is executed are saved to a file, called *CmpMstr*. You can then source these new values into your script.

**NOTE** — [Table 5-1](#) maps the MYNAH comparison extensions that use the Compare Master feature with the appropriate package.

**Table 5-1.** Comparison Extensions

If you use this package ...	See
General	<a href="#">xmyCompare</a> , <a href="#">Section 7.2.3</a>
TermAsync	<a href="#">compare</a> , <a href="#">Section 9.5.1.1</a>
Term3270	<a href="#">compare</a> , <a href="#">Section 10.4.1.1</a>

### 5.1 Compare Master Basics

To use the Compare Master feature, you

1. Create a main Tcl source file, for example *sample.tcl*, and a Compare Master file, for example *sample.cmp*.

- In the source file, write your comparison statements with the expected values coded using variable, for example,

```
$c1 compare -region {1 1 10 1} -expectMaster Cmp_1
```

**NOTE** — Region dimensions use the format *{row column width height}*.

In addition, you must source in the Compare Master file, for example

```
xmySource -prependScriptDir sample.cmp
```

- In the Compare Master file, create a series of **set** commands that assign expected comparison values to the variables you coded in the source file, for example

```
set Cmp_1 {"successful"}
```

2. Execute the source file.

When the script finishes executing, by default it produces a new Compare Master file, called *CmpMstr*, in the script output directory. The *CmpMstr* file contains the actual value encountered while the script was performing the comparisons.

If comparisons in the original Compare Master file (e.g., *sample.cmp*) are no longer valid or if for some reason you need to change the data, you can copy a newly generated *CmpMstr* file into the original Compare Master file and the main Tcl source file can be re-executed. For example, if the expected values are not encountered, you can copy the *CmpMstr* file to the directory containing the original Compare Master file and rename it *sample.cmp*.

Keep the following in mind when using the Compare Master feature:

- Since each script execution creates a different output directory (depending on the number of output backups configured), you will have a choice of using a new Compare Master file from any of the previous runs.
- The *CmpMstr* file will not be generated if an output directory is not specified.
- The output directory is never generated for scripts run using **xmytclsh**.
- There will be just one new *CmpMstr* file produced for each execution of the main Tcl script. This is regardless of the number of dependent scripts being sourced by the main script or the number of procedures executed from a proc library.

## 5.2 Region Dimension Restrictions

The region size dimensions (width and height) you specify for the comparison statement in the source file must match exactly the dimensions of the expected value you set in the Compare Master file. If they don't, the script will fail and you will receive the following message:

```
expected data and region are not the same size
```

For example, using the code in Step 1, the **compare** statement specifies a ten-character value, such as the word *successful*. If you set the variable **Cmp\_1** to a string that is greater than ten characters, such as

```
set Cmp_1 {"unsuccessful"}
```

or less than ten characters, such as

```
set Cmp_1 {"failure"}
```

the script will fail.

You can compensate by editing the values in your initial Compare Master file, either truncating a string that is greater than the specified range, for example

```
set Cmp_1 {"unsuccessf"}
```

or adding spaces or any other characters to match the specified range, for example

```
set Cmp_1 {"failure123"}
```

### 5.3 Suppressing the Compare Master

If you do not want to generate a new *CmpMstr* file, enter the following line of code at the beginning of your script:

```
set xmyVar(CreateNewCompareMaster) no
```

If the above line does not exist or if **xmyVar(CreateNewCompareMaster)** is set to any other value, the *CmpMstr* file will be created when the script is executed.

### 5.4 Example

Presume you have a script file, *sample.tcl*, containing the following code:

```
xmySource -prependScriptDir sample.cmp
set c1 [xmyTermAsync connect]
$c1 compare -region {1 1 10 1} -expectMaster CmpMstr(sample_1)
$c1 compare -region {2 1 12 1} -expectMaster CmpMstr(sample_2)
```

and you have a Compare Master file, *sample.cmp*, containing the following:

```
set CmpMstr(sample_1) {"successful"}
set CmpMstr(sample_2) {"732-555-1212"}
```

If you execute *sample.tcl* and the comparison found the string *failure* instead of *successful*, the newly generated *CmpMstr* file would contain the following:

```
set CmpMstr(sample_1) {"failure  "}
set CmpMstr(sample_2) {"732-555-1212"}
```



## 6. xmyVar Global Script Variables

This section contains the complete list of the variables in the global **xmyVar** array. The variables are read-write except where indicated. These are array elements that are available to all domains.

**NOTE** — One of the variables is the MYNAH symbol table, which contains user-supplied data associated with a script. Symbol tables contain symbol-value pairs; they can be read and modified by the script during execution.

Symbol tables are described in more detail in Sections [6.18](#), [7.2.18](#), [7.2.19](#), [7.2.20](#), and [7.2.21](#).

### 6.1 Channel

#### Syntax

```
set xmyVar(Channel)
```

#### Description

**xmyVar(Channel)** returns the Telexel channel name of the process. This is the communications channel on which the Script Engine receives all its messages.

This variable is read-only.

## 6.2 CreateNewCompareMaster

### Syntax

```
set xmyVar(CreateNewCompareMaster)
```

### Description

**xmyVar(CreateNewCompareMaster)** specifies whether a new Compare Master file is created when you run a script.

If **xmyVar(CreateNewCompareMaster)** is not defined or set to any value other than *no*, a new Compare Master file is created.

### Example

```
> set xmyVar(CreateNewCompareMaster) no
```

## 6.3 DatabaseMode

### Syntax

```
set xmyVar(DatabaseMode)
```

### Description

**xmyVar(DatabaseMode)** is set to true (1) if the SE is running in database mode, false (0) otherwise. For MYNAH to be running in the database mode means the database is up and MYNAH is interacting with it when it runs scripts.

This variable is read-only.

### Example

A basic use is to determine whether you are in database mode or not.

```
> set xmyVar(DatabaseMode)
1
```

In this example, you test to see if you are in database mode. If you are not, you exit. If you are, you create a connection.

```
> if { $xmyVar(DatabaseMode) = 0 } {
  xmyExit "Exiting, not in database mode"
} else {
  set Conn [xmyTerm3270 connect]
}
```

## 6.4 EngineMode

### Syntax

```
set xmyVar(EngineMode)
```

### Description

**xmyVar(EngineMode)** returns one of **FullState**, **ConnOnly**, or **StateLess**.  
Command-line SEs always run in **FullState** mode. Background and embedded SEs run in any of the three modes.

This variable is read-only.

### Example

The simplest example is to return the engine mode.

```
> set xmyVar(EngineMode)
fullState
```

In this example, you reconnect only if you are in stateless mode to save overhead involved in reconnecting.

```
> if {$xmyVar(EngineMode) == "stateLess"} {
  set Conn [xmyTerm3270 connect]
  xmySymTblPut -tag Conn -value $Conn
} else {
  set Conn [xmySymTblGet -tag Conn]
}
```



## 6.5 EngineType

### Syntax

```
set xmyVar(EngineType)
```

### Description

**xmyVar(EngineType)** is set to one of the three SE types: **embedded**, **background**, or **commandline**.

This variable is read-only.

### Example

You can use **xmyVar(EngineType)** to find out what SE type is being used.

```
> set xmyVar(EngineType)
commandline
```

This example prompts you for a password if you are running the script interactively. If not, the script a the default password.

```
> if {$xmyVar(EngineType) == "embedded"} {
  keylset v -prompt "Enter Password"
  set pword [xmyPrompt [list $v]]
} else {
  set pword "default"
}
```

## 6.6 ExitHandler

### Syntax

```
set xmyVar(ExitHandler) Handler_procedure
```

### Description

**xmyVar(ExitHandler)** takes as input the name of a Tcl procedure to call immediately after the script normally or abnormally terminates. The Tcl procedure should have the following syntax:

```
proc myExitHandler {code returnValue} {}
```

where

- |                    |   |
|--------------------|---|
| <i>code</i>        | Specifies the return code of the script. Usually this is the string <i>ok</i> or <i>error</i> , but can also be any acceptable <i>code</i> of the <b>return -code code</b> command, |
| <i>returnValue</i> | Specifies the last interpreter result value.  |

As long as the Tcl interpreter is not corrupted during script execution, this function is always called.

**NOTE** — The **ExitHandler** function is called only when executing a script in the background. It is not called if the script is executed using **xmytclsh** or the GUI's embedded SE.

An **ExitHandler** can influence the Run Summary field in the Runtime object. This is important because the Run Summary field is one of the columns in the Job Status window of the GUI and is therefore always visible to users.

It is recommended that users write an **ExitHandler** procedure. Once the procedure is written, it can be made use of in one of three ways:

- Each script can have a **set xmyVar(ExitHandler)** line
- Each script can call a user written initialization procedure and the initialization procedure has the **set xmyVar(ExitHandler)** line
- Configure SE groups to run a start-up script and the start-up script has the **set xmyVar(ExitHandler)** line.

Since the **ExitHandler** is evaluated immediately after the script finishes, it masks the final run status of the script and the interpreter result unless the procedure propagates them upward to the script submitter using the **return** command, as in the first example below.

When the **xmyExit** method is used in the **ExitHandler**, the script's final return code will always be "OK." If the prior return code (*\$code*) is needed, the argument to **xmyExit** should include the code, as in the third example below.

### Examples

The following example uses the return command to propagate the script's return code and the interpreter's result back to the caller:

```
> proc myExitHandler {code returnValue} {
    if {$code != "ok"} {
        exec echo "$xmyVar(ScriptName) failed: $returnValue" \
            | mailx user@sys
    }
    return -code $code $returnValue
}
> set xmyVar(ExitHandler) myExitHandler
```

The following example determines what string should be returned. (The Run Summary field of the **Runtime** object will be set to this string.) Note that neither parameter to the procedure is returned.

```
> proc myExitHandler {code returnValue} {
    global xmyVar
    if {$xmyVar(FailedCompares) > 0 ||
        $xmyVar(WarningCompares) > 0} {
        xmyExit "inconclusive"
    } else {
        xmyExit "success"
    }
}
}> set xmyVar(ExitHandler) myExitHandler
```

This last example illustrates how to include the return code (*\$code*) and the interpreter's results (*\$returnValue*) in the **xmyExit** string to be returned.

```
> proc myExitHandler {code returnValue} {
    global xmyVar
    xmyExit "code=$code : returnValue=$returnValue"
}
> set xmyVar(ExitHandler) myExitHandler
```

## 6.7 FailedCompares

### Syntax

```
set xmyVar(FailedCompares)
```

### Description

**xmyVar(FailedCompares)** is the number of compares that have failed in the currently executing script.

This variable is read-only.

There are several MYNAH language commands that automatically update **xmyVar(FailedCompares)**. The following list identifies the commands according to their extension packages:

- General package
  - **xmyCompare**
  - **xmyDiff**
- TermAsync package
  - **\$connection compare**
- Term3270 Package
  - **\$connection compare**
- TermFCIF package
  - **\$handle compare**
  - **\$handle compareTags**
  - **\$handle extraTags**

Each of these commands will also produce **compare** blocks in the *compares* file.

### Example

In this example, you expect to find four failed comparisons. If this is not true, you have the script return a string stating how many failed comparisons were found.

```
> if { $xmyVar(FailedCompares) != 4 } {  
    set result "$result|failed compares should be 4,  
              instead $xmyVar(FailedCompares)"  
}
```

This time you check to see if there were any failed comparisons. If there were, you exit with the exit string *failure*. If there weren't, you exit with the exit string *success*.

```
> if {$xmyVar(FailedCompares) > 0} {  
    xmyExit "failure"  
} else {  
    xmyExit "success"  
}
```

## 6.8 GoodCompares

### Syntax

```
set xmyVar(GoodCompares)
```

### Description

**xmyVar(GoodCompares)** is the number of compares that have been executed successfully in the currently executing script.

This variable is read-only.

There are several MYNAH language commands that automatically update **xmyVar(GoodCompares)**. The following list identifies the commands according to their extension packages:

- General package
  - **xmyCompare**
  - **xmyDiff**
- TermAsync package
  - **\$connection compare**
- Term3270 Package
  - **\$connection compare**
- TermFCIF package
  - **\$handle compare**
  - **\$handle compareTags**
  - **\$handle extraTags**

Each of these commands will also produce **compare** blocks in the *compares* file.

### Example

In this example, you expect to find six successful comparisons. If this is not true, you have the script return a string stating how many successful comparisons were found.

```
> if { $xmyVar(GoodCompares) != 6 } {  
    set result "$result|good compares should be 6, \  
              instead $xmyVar(GoodCompares)"  
}
```

## 6.9 LibraryPath

### Syntax

```
set xmyVar(LibraryPath)
```

### Description

**xmyVar(LibraryPath)** returns the value of the SE configuration **LibraryPath** parameter.

This variable is read-only.

## 6.10 MaxFails

### Syntax

```
set xmyVar(MaxFails)
```

### Description

**xmyVar(MaxFails)** is used to set the maximum number of **compare** statements allowed to fail before the script exits. The script will abort when the **xmyVar(MaxFails)** value is reached.

### Example

The following sets the maximum number of **compare** statements so that a script will abort when when two failed **compare** statements have occurred.

```
> set xmyVar(MaxFails) 2
```



## 6.11 MaxFailsHandler

### Syntax

```
set xmyVar(MaxFailsHandler)
```

### Description

**xmyVar(MaxFailsHandler)** takes as input the name of a Tcl procedure to call when the number of failed compares equals **xmyVar(MaxFails)**. The Tcl procedure should have the following syntax:

```
> proc myFailsHandler {} {  
    MaxFailsHandler script  
}
```

This function executes in the same context of the script, so system and user variables are all available. For example, the following is a valid handler:

```
> set xmyVar(MaxFailsHandler) myFailsHandler  
> proc myFailsHandler {} {  
    global xmyVar  
    exit $xmyVar(FailedCompares)  
}
```

**xmyVar** is declared as global so that when the script terminates, **xmyVar** will pass the number of failed comparisons.

**NOTE** — Remember, the script will abort when the number of failed compares set by **xmyVar(MaxFails)** is reached.

### Example

In the following, we first define the procedure **maxhandler**. The return string from **maxhandler**'s script, the string *max fails exceeded*, is returned to the caller of the script.

```
> proc maxhandler {} {  
    xmyExit "max fails exceeded"  
}  
  
> set xmyVar(MaxFails) 2  
> set xmyVar(MaxFailsHandler) maxhandler  
> set xmyVar(OutputLevel) {*}
```

## 6.12 OutputDir

### Syntax

```
set xmyVar(OutputDir)
```

### Description

**xmyVar(OutputDir)** is the name of the directory that is to contain script output.

This variable is read-only.

### Example

In this example you create your own file, *userData*, in the output directory.

```
> set fileName $xmyVar(OutputDir)/userData
> set filePtr [open $fileName w]
> foreach item $alist {
    puts $filePtr $item
}
> close $filePtr
```

## 6.13 OutputLevel

### Syntax

```
set xmyVar(OutputLevel)
```

### Description

**xmyVar(OutputLevel)** is a Tcl list containing the type of output that should be written to the script output directory, e.g., { \*.\* }.

### Example

In this example you use the star (\*) wildcard to write all output to the output directory.

```
> set xmyVar(OutputLevel) {*}
```

## 6.14 RuntimeId

### Syntax

```
set xmyVar(RuntimeId)
```

### Description

**xmyVar(RuntimeId)** is the ID of the database Runtime Object used to record the status of the current script.

This variable is read-only.

```
> set xmyVar(RuntimeId)
43
```

## 6.15 ScriptName

### Syntax

```
set xmyVar(ScriptName)
```

### Description

**xmyVar(ScriptName)** is the full name of the script being executed, e.g., */home/scripts/script1.tcl*.

This variable is read-only.

### Example

```
> set xmyVar(ScriptName)
/home/scripts/script1.tcl
```

## 6.16 SEGroup

### Syntax

```
set xmyVar(SEGroup)
```

### Description

**xmyVar(SEGroup)** is the name of the SE group to which the SE running the script belongs. Embedded SEs and Command-line SEs have a group name of "".

This variable is read-only.

### Example

```
> set xmyVar(SEGroup)
SeGp1
```

## 6.17 SubmittedBy

### Syntax

```
set xmyVar(SubmittedBy)
```

### Description

**xmyVar(SubmittedBy)** contains a UNIX username. In Command-line and Embedded SEs, **xmyVar(SubmittedBy)** contains the UNIX username of the person who started the process. In Background SEs, **xmyVar(SubmittedBy)** contains the UNIX username of the person who submitted the script (via the GUI or CLUI).

This variable is read-only.

### Example

In this example, a different password is used depending on who ran the script. The file 'logins' contains test logins and passwords.

```
> set l [xmyUdb read -file $env(XMYHOME)/logins -decrypt]
> set aPassword [keylget l $xmyVar(SubmittedBy)]
> if {$aPassword == ""} {
  xmyExit "no password found for user $xmyVar(SubmittedBy)"
} else {
  LoginToSut $xmyVar(SubmittedBy) $aPassword
}
```

## 6.18 SymTbl

### Syntax

```
set xmyVar(SymTbl)
```

### Description

**xmyVar(SymTbl)** is the MYNAH symbol table passed into scripts at start-up and passed back to the execution requester at script termination time.

This variable is read-only.

The format of the symbol table is a Tcl list of lists, where each sublist contains a variable (tag)/value pair. Like any Tcl list, its size is limited only by the amount of memory available to the process in which it is executed.

During the execution of the parent script, the symbol table is passed along with requests for child script execution. New or changed values are returned when the results of child execution are handled (after **sendWait** or **Wait** commands). New or changed values are also passed to the original sender of the parent script execution request at completion time.

**NOTE** — When working with Child Scripts (see [Section 8](#)), the symbol table can not be passed between SEs running on different dispatchers.

Entries in the symbol table can be created using **xmySymTblPut** ([Section 7.2.21](#)). **xmyVar(SymTbl)** will return the entire symbol table while **xmySymTblGet** ([Section 7.2.20](#)) will return specific values for a specified tag.

### Example

```
> set Conn [xmyTerm3270 connect]
.xmyTerm3270_1

> xmySymTblPut -tag Conn -value $Conn
> set xmyVar(SymTbl)
{Conn .xmyTerm3270_1}

> xmySymTblPut -tag test -value 42
> set xmyVar(SymTbl)
{Conn .xmyTerm3270_1} {test 42}
```

## 6.19 SymTblNAC

### Syntax

```
set xmyVar(SymTblNAC)
```

### Description

**xmyVar(SymTblNAC)** is an internal list not useful to users.

This variable is read-only.

## 6.20 TestVersionId

### Syntax

```
set xmyVar(TestVersionId)
```

### Description

**xmyVar(TestVersionId)** is the current unique Test Version ID based on the scoping of **xmyBegin/xmyEnd** statements.

This variable is read-only.

## 6.21 TimeoutHandler

### Syntax

```
set xmyVar(TimeoutHandler)
```

### Description

**xmyVar(TimeoutHandler)** is the name of a Tcl procedure to call when there is no response from the SUT in the number of seconds specified at the domain or connection level. The Tcl procedure should have the following syntax:

```
proc TimeoutHandler {conn pkg} {}
```

where

*conn* is the handle of the connection on which the timeout occurred.

*pkg* is the domain extension package identifier (e.g., **xmyTermAsync**).

If no **TimeoutHandler** is defined and a timeout occurs, the script exits with the status `TCL_ERROR`. If a **TimeoutHandler** is defined, the engine will execute the timeout handler before replying to the requester of script execution. The reply status in this case will be `TCL_OK` if the **TimeoutHandler** executed successfully. To override this behavior and return `TCL_ERROR` regardless of whether a **TimeoutHandler** is defined, a handler similar to the one in the example can be used.

**NOTE** — Timeouts are set at the domain level.

### Example

This example returns an error so that the requester of script execution sees a status of `TCL_ERROR`.

```
> proc myTimeoutHandler {conn pkg} {  
    return -code error "timeout in conn $conn, pkg $pkg"  
}
```

## 6.22 UpdateCompares

### Syntax

```
set xmyVar(UpdateCompares)
```

### Description

**xmyVar(UpdateCompares)** is the flag that tells the MYNAH System whether to update counters. When this variable is set to **true** (1), which is the default, **compare** statements update the value of the variables **xmyVar(GoodCompares)**, **xmyVar(FailedCompares)**, and **xmyVar(WarningCompares)**.

### Example

In this example, **xmyVar(UpdateCompares)** is set to false, letting you run some compares with without updating the **GoodCompares**, **FailedCompares**, and **WarningCompares** variables.

```
> set xmyVar(UpdateCompares) false
> xmyCompare -expr {$x==5}
> xmyCompare -expr {$x==6}
> xmyCompare -expr {$x==5} -label label5
> xmyCompare -expr {$x==6} -label label6
> xmyCompare -expr {$x==5} -warning
> xmyCompare -expr {$x==6} -warning
```



## 6.23 WarningCompares

### Syntax

```
set xmyVar(WarningCompares)
```

### Description

**xmyVar(WarningCompares)** is the number of warning (not failed) compares executed in the current script. This count is incremented when the **-warning** option is used in **compare** methods.

This variable is read-only.

There are several MYNAH language commands that automatically update **xmyVar(WarningCompares)**. The following list identifies the commands according to their extension packages:

- General package
  - **xmyCompare**
  - **xmyDiff**
- TermAsync package
  - **\$connection compare**
- Term3270 Package
  - **\$connection compare**
- TermFCIF package
  - **\$handle compare**
  - **\$handle compareTags**
  - **\$handle extraTags**

Each of these commands will also produce **compares** blocks in the *compares* file.

### Example

In this example, you expect to find two warning comparisons. If this is not true, you have the script return a string stating how many warning comparisons were found.

```
> if { $xmyVar(WarningCompares) != 6 } {  
    set result "$result|warning compares should be 2,  
              instead $xmyVar(WarningCompares)"  
}
```



## 7. General MYNAH Tcl Extensions

### 7.1 Overview

The Tcl interpreter in a Script Engine (SE) contains the general MYNAH extension package, which implements a set of Tcl commands that are automatically available to a script when it starts executing.

### 7.2 General Commands

Table 7-1 lists the general MYNAH extensions, grouping them in the categories listed in Table 1-3.

Table 7-1. General MYNAH Extensions (Sheet 1 of 2)

Category	Command	Description	Section
<b>Connection</b>	<b>exit</b>	Re-implementation of the Tcl <b>exit</b> command to act like <b>xmyExit</b> .	7.2.1, Page 7-3
	<b>xmyExit</b>	Explicitly exits the script and the Tcl interpreter.	7.2.7, Page 7-16
	<b>xmyLoadPkg</b>	Loads a Tcl extension package.	7.2.9, Page 7-18
	<b>xmyUnloadPkg</b>	Removes the named extension package from the SE.	7.2.22, Page 7-38
<b>Data Entry/Retrieval</b>	<b>xmyDate</b>	Returns the requested date and time.	7.2.4, Page 7-8
	<b>xmyPrint</b>	Writes to the output file in the script output directory.	7.2.11, Page 7-24
	<b>xmyPrompt</b>	Allows an embedded script to receive data from you at script execution.	7.2.12, Page 7-25
	<b>xmySource</b>	Reads in the file and sends it to a Tcl interpreter.	7.2.17, Page 7-33
	<b>xmySymTblDel</b>	Remove the tag/value pair reference from symbol table.	7.2.18, Page 7-34
	<b>xmySymTblExists</b>	Determines if a variable exists in the MYNAH symbol table.	7.2.19, Page 7-35
	<b>xmySymTblGet</b>	Retrieves the value of a variable from the symbol table.	7.2.20, Page 7-36
	<b>xmySymTblPut</b>	Lets you add or change values in the symbol table.	7.2.21, Page 7-37

**Table 7-1.** General MYNAH Extensions (Sheet 2 of 2)

Category	Command	Description	Section
Comparisons	<b>xmyBegin</b>	Begins a block that delimits a test.	7.2.2, Page 7-4
	<b>xmyCompare</b>	Updates the script variables <b>xmyVar(GoodCompares)</b> or <b>xmyVar(FailedCompares)</b> or <b>xmyVar(Warningcompares)</b> .	7.2.3, Page 7-6
	<b>xmyDiff</b>	Compares two files.	7.2.5, Page 7-11
	<b>xmyEnd</b>	Terminates a block that delimits a test.	7.2.6, Page 7-15
	<b>xmyMask</b>	Class command used to produce an instance of a mask object.	7.2.10, Page 7-20
	<b>xmyReadGrep</b>	Reads the next line from a file that matches a regular expression.	7.2.13, Page 7-26
	<b>xmyRegex</b>	Searches for a regular expression in the given input data string.	7.2.14, Page 7-29
	<b>xmySimilar</b>	Compares numbers to see if they differ by an entered percentage.	7.2.15, Page 7-31
	<b>xmyUpdateResult</b>	Updates the status for the Result object	7.2.23, Page 7-39
Location	<b>xmyGetLine</b>	Returns a line corresponding to an entered integer.	7.2.8, Page 7-17
Waiting	<b>xmySleep</b>	Pauses the script	7.2.16, Page 7-32

## 7.2.1 **exit**

### **Syntax**

```
exit ?exitString?
```

### **Return**

No result

### **Description**

The standard Tcl **exit** command is re-implemented to behave exactly like **xmyExit**. See [Section 7.2.7](#), for more information.

### **Example**

```
> exit "too many failed compares"
```

## 7.2.2 xmyBegin

### Syntax

```
xmyBegin -testid id  
xmyBegin -label label
```

### Return

No result

### Description

The **xmyBegin** command starts a block that delimits a test. **xmyBegin** is used when database results reporting is required. (i.e., Test Management.) An **xmyBegin/xmyEnd** block collects compare results for that block and associates them with a test.

If the MYNAH System is running in non-database mode, **xmyBegin** does nothing (including syntax checking).

There are two versions of this command:

- The **-testid** version starts a block that delimits a test. The *id* is inserted in the code by the user, who gets the *id* from the database. The *id* was generated when the user created the Test object. It represents a test version object. **xmyBegin** must be terminated *in the same script* by **xmyEnd**. If not, incomplete results will be reported to the database.

**NOTE** — See Section 8 of the *MYNAH System Users Guide*, for information on Test objects.

- The **-label** version must be enclosed in an **xmyBegin/xmyEnd** block with a testid. It provides a runtime-defined grouping of compares.

Labels need not be unique and can be nested.

A *label* cannot contain spaces. If you do use spaces, the system assumes that a space divides the *label* string into several labels. For example, if you use

```
xmyBegin -label "test abc"
```

the system generates two Result objects, one for *test* and one for *abc*.

It is an error for two **xmyBegin** commands to have the same *testid*. The SE maintains a list of all *testids* encountered to enforce this restriction.

### Example

```
> xmyBegin -testid 2334
> if {$xmyVar(FailedCompares) == 0} {
    xmyExit "my result=ok"
} else {
    xmyExit "my result=fail"
}
> xmyEnd -testid 2334
```

### Exceptions

If **xmyBegin -label *label*** is not preceded by **xmyBegin -id *id*** at some point in the script.

Two **xmyBegin** commands with the same *testid*.

### 7.2.3 xmyCompare

#### Syntax

```
xmyCompare -expr arbitraryExpression  
           ?-recvValue left_value ?-expectMaster right_value??  
           ?-label label? ?-warning?
```

#### Return

The result of evaluating *arbitraryExpression* (1 or 0).

#### Description

The **xmyCompare** command updates the script variables **xmyVar(GoodCompares)** or **xmyVar(FailedCompares)**, depending on the result of evaluating *arbitraryExpression*. If the **xmyCompare** method is contained inside a begin/end block (see **xmyBegin**, [Section 7.2.2](#)), the results for that block are also updated.

**xmyCompare** takes the following options:

- |   |  |
|---|--|
| <b>-expr <i>arbitraryExpression</i></b> | Indicates the expression to be evaluated.<br><b>-expr</b> and <b>-recvValue</b> are mutually exclusive.  |
| <b>-recvValue <i>left_value</i></b>     | Specifies the received variable or value to be compared, which is analogous to the left hand value of the <b>-expr</b> expression. <b>-recvValue</b> is supplied when using the Compare Master feature ( <a href="#">Section 5</a> ).<br><b>-recvValue</b> and <b>-expr</b> are mutually exclusive.  |
| <b>-expectMaster <i>right_value</i></b> | Specifies the name of the Tcl variable that will contain the expected string, which is analogous to the right hand value of the <b>-expr</b> expression. <b>-expectMaster</b> is supplied when using the Compare Master feature ( <a href="#">Section 5</a> ).<br><b>-expectMaster</b> can be specified only if the <b>-recvValue</b> option is specified. |
| <b>-label <i>label</i></b>              | Indicates that this is a labeled compare. The label will be written to the script output file and saved in the <b>CompareResult</b> database object.   |
| <b>-warning</b>                         | Indicates that the result of compare should update <b>WarningCompares</b> instead of the <b>FailedCompares</b> .   |



## Side Effects

Writes compare event to script output and updates script variables listed in the description.

## Example

Script command (where **\$result** would have been set somewhere in the code):

```
> xmyCompare -expr {$result=="ok"}
```

Script output event (if compare succeeded):

```
19951201:125637:compare:General:data::good:<some-index-number>
```

The index numbers contain the number of bytes into the *compares* file to look for the record of that **compare**. The numbers are indexes into the *compares* file in the output directory.

The following example illustrates using the Compare Master, and is analogous to coding

```
> xmyCompare -expr {$x=="1"}
```

In the Compare Master file, *script.cmp*, enter

```
set xyz "1"
```

and enter in your script

```
> xmySource script.cmp  
> set x [$conn1 screen -region {1 1 1 1}]  
> xmyCompare -recvValue $x -expectMaster xyz
```

## 7.2.4 xmyDate

### Syntax

```
xmyDate ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -month ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -monthName ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -day ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -dayName ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -year ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -hour ?-time timestring? ?-increment n? ?-decrement n?  
xmyDate -minute ?-time timestring? ?-increment n? \  
                                     ?-decrement n?  
xmyDate -second ?-time timestring? ?-increment n? \  
                                     ?-decrement n?  
xmyDate -julian ?-time timestring? ?-increment n? \  
                                     ?-decrement n?
```

### Return

Date or time corresponding to entered arguments.

### Description

The **xmyDate** command returns the requested date and time functionality as determined by the provided arguments.

**NOTE** — The descriptions and examples in this section assume today is Wednesday, August 23, 1995, 10:00 AM EDT.

**xmyDate** returns a date or time as determined by the following arguments:

1. If no arguments are provided, **xmyDate** returns the current date in seconds since 00:00:00 GMT, January 1, 1970.

If **-time** is provided, **xmyDate** converts the **timestring** following **-time** to seconds since 00:00:00 GMT, January 1, 1970 instead of using the current date.

If either **-increment** or **-decrement** option is provided followed by a value, the current date in seconds since 00:00:00 GMT, January 1, 1970 increased or decrease by the appropriate value is returned.

2. If **-month** is provided, **xmyDate** returns the current month (1 - 12).

**NOTE** — The TclX **fmtclock** command returns a three character string for the month. For example, **getcloc**k returns  
809186400.  
As input to **fmtclock**, it returns  
Wed Aug 23 10:00:00 EDT 1995.

3. If **-monthName** is provided, **xmyDate** returns the full name of the current month.
4. If **-day** is provided, **xmyDate** returns the current day of the month (1 - 31).
5. If **-dayName** is provided, **xmyDate** returns the current day as a three character string.
6. If **-year** is provided, **xmyDate** returns the current year as a four character string.
7. If **-hour** is provided, **xmyDate** returns the current hour as a two character string.
8. If **-minute** is provided, **xmyDate** returns the current minute as a two character string.
9. If **-second** is provided, **xmyDate** returns the current second as a two character string.
10. If **-julian** is provided, **xmyDate** returns the Julian date equivalent of the current date.

For Items 2 through 8, **xmyDate** first determines whether an optional **-time** argument followed by **timestring** is present. If it is, **timestring** is used instead of the current date and time. The appropriate field is then extracted or the Julian calculation performed. For example, if the argument **month** is used in the **xmyDate** command then the **month** part of the **timestring** is extracted and used for the **xmyDate** command.

You can also use either the **-increment** or **-decrement** option followed by a value. If one is present, then the appropriate arithmetic is performed on the extracted field, and the calculated value is returned. If neither is present, the extracted field is returned.

For Item 10, either the current date or the value following **-time** is converted to a Julian date and then the **-increment** or **-decrement** arithmetic is performed and the result returned.

If **-year** is provided, **xmyDate** returns the current year as a four character string.

**NOTE** — If a timestring contains a two character year, **xmyDate** determines the century, based on whether the year is in the range 70-99 or the range 00-38. Any year in the range 70-99 is assumed to mean 1970-1999, and any year in the range of 00-38 is assumed to mean 2000-2038.

**NOTE** — Values in the range 39-69 are NOT supported.

For more information on permissible formats for *timestring* use the **telhelp** facility..

### Example

This example returns the seconds since 00:00:00 GMT, January 1, 1970.

```
> xmyDate  
809186400
```

This example calculates the current month, August (08) and increments it by five, January (01).

```
> xmyDate -month -increment 5  
01
```

This example increments the current date in seconds since 00:00:00 GMT, January 1, 1970 by five seconds.

```
> xmyDate -increment 5  
809186405
```

This example increments the number of seconds between 00:00:00 GMT, January 1, 1970 and the entered timestring, the last second of 1995, by five seconds.

```
> xmyDate -time {Dec 31, 1995 11:59:59 PM EST} -increment 5  
820472404
```

This example increments the month of December by one, returning **01** (for January)

```
> xmyDate -month -time {Dec 1} -increment 1  
01
```

This example increments the month of December by one, returning the name January.

```
> xmyDate -monthName -time {Dec 1} -increment 1  
January.
```

This example returns the Julian date equivalent of the current date.

```
> xmyDate -julian  
235
```

## 7.2.5 xmyDiff

### Syntax

```
xmyDiff ?-label label? ?-warning? ?-noFormat? \  
    ?-listFile listFile? \  
    ?-sedScriptFile sedScriptFile? \  
    ?-scriptBaseFile scriptBaseFile?  
  
xmyDiff ?-label label? ?-warning? ?-noFormat? \  
    ?-listFile listFile? \  
    ?-sedScriptFile sedScriptFile? \  
    -file1 file1 -file2 file2
```

### Return

1 if there were differences  
0 if there were no differences

### Description

**xmyDiff**'s first form compares *scriptBaseFile.out* with *scriptBaseFile.mstr*. **xmyDiff** assumes *scriptBaseFile.out* is in the current script output directory and that *scriptBaseFile.mstr* is in the same directory as the current script.

**xmyDiff**'s second form compares *file1* with *file2*.

Both forms take the following options:

<b>-label label</b>	Indicates that this is a labeled compare. The label will be written to the script output file and saved in the <b>CompareResult</b> database object.
<b>-warning</b>	Causes the script variable <b>xmyVar(WarningCompares)</b> to be incremented instead of <b>xmyVar(FailedCompares)</b> if differences are found.
<b>-noFormat</b>	If this option is specified, the files to be compared will not be formatted first. This option speeds up processing of non-FCIF messages.

- listFile** *listFile* Specifies the name of a file containing a list of **sed(1)** scripts to be applied to the files to be differenced. If *listFile* does not start with '/', MYNAH will assume it resides in the \$XMYHOME/data/sedscripts directory. Furthermore, if any of the sed script files it contains do not start with '/', MYNAH will assume those files reside in the \$XMYHOME/data/sedscripts directory. *listFile* can be a list of file names instead of a single file name. This option can be used in combination with the **-sedScriptFile** option.
- sedScriptFile** *sedScriptFile* Specifies the name of the **sed(1)** script to be applied to the files to be differenced. If *sedScriptFile* does not start with '/', MYNAH will assume it resides in the \$XMYHOME/data/sedscripts directory. This option can be used in combination with the **-listFile** option. *sedScriptFile* can be a list of file names instead of a single file name.

**xmyDiff**'s first form also takes the following option:

- scriptBaseFile** *scriptBaseFile* Specifies the name of *scriptBaseFile.out*. If *scriptBaseFile* is not specified, the default value is the name of the script stripped of its *.tcl* suffix.

**xmyDiff**'s second form also takes the following options:

- file1** *file1* Specifies the name of the first file in the comparison.
- file2** *file2* Specifies the name of the file to compared with *file1*.

Files generated by the Term3270 package may contain the UNIX carriage return character, ^M (<control>-M), at the end of each line. The MYNAH System includes an **sed** script, *strip\_ctl\_m*, to strip out the ^M characters from these files when **xmyDiff** compares them. This script is located in \$XMYHOME/data/sedscripts and can be specified as the *sedScriptFile* to the **-sedScriptFile** option.

For example, if you are comparing *file1* with *file2* and either *file1* or *file2* has ^M characters that should be stripped out prior to the compare operation, you would execute

```
xmyDiff -sedScriptFile strip_ctl_m file1 file2
```

**NOTE** — If your files have control-M characters in them, you are strongly advised to strip them out using

**-sedScriptFile** *strip\_ctl\_m* as shown above, otherwise you will get unpredictable results.

**NOTE** — Since the **strip\_ctl\_m sed** script resides in the *\$XMYHOME/data/sedscripts* directory, the **xmyDiff** subcommand will find it automatically and you don't have to specify the full directory.

### Exceptions

- Missing/invalid arguments
- Failure to open temporary work file in */tmp*
- Failure to open any specified **sed** script file
- Failure to open any specified list file
- Combining **-file1** and **-file2** arguments with **-scriptBaseFile** argument
- Failure to open **-file1** or **-file2**
- Specifying only one of **-file1** or **-file2**
- Failure to determine the script base file name
- Failure to determine the master file name
- Failure to open the master file
- Failure to determine the output file name
- Failure to open the output file
- Failure to fork **xmyDiff** shell process
- Exit failure in **xmyDiff** shell process

## Side Effects

Updates the values of the script variables **xmyVar(GoodCompares)**, **xmyVar(FailedCompares)**, and **xmyVar(WarningCompares)**.

Creates an event in the script output file and adds differenced records to the *compares* file.

**NOTE** — When an exception occurs, the compare events are not recorded in the script output file or the script compare file.

## Example

Script command:

```
> xmyDiff -warning -scriptBaseFile script1
```

Script output event (if no differences were found):

```
19960523:141014:compare:General:diff::good - no differences:2024
```



## 7.2.6 xmyEnd

### Syntax

```
xmyEnd -testid id  
xmyEnd -label label
```

### Return

No result

### Description

The **xmyEnd** command terminates a block that delimits a test. The argument must correspond to an *id* or *label* argument to an earlier **xmyBegin** command. If it corresponds to an *id*, then the results object for that test object will be updated at script completion time. If the begin/end block is nested inside another begin/end block, the compare counts (the values of **goodCompares**, **failedCompares**, and **warningCompares**) are added to the compare counts of the outside block.

A *label* cannot contain spaces. If you do use spaces, the system assumes that each a space divides the *label* string into several labels. For example, if you use

```
xmyEnd -label "test abc"
```

the system generates two Result objects, one for *test* and one for *abc*.

When **xmyEnd** is executed, the results for that block are saved and flagged as a database update that must be performed at script completion time.

### Exceptions

If no corresponding **xmyBegin**.

## 7.2.7 xmyExit

### Syntax

```
xmyExit ?exitString?
```

### Return

No result

### Description

The **xmyExit** command explicitly exits the script. It also exits the Tcl interpreter unless the SE is running in **fullState** mode. **xmyExit** returns the exit code **TCL\_OK** and the value of *exitString*. If *exitString* is not specified, the previous value is used. The Tcl **error** command must be used to return a code other than **TCL\_OK**.

Command line SEs write the *exitString* to `stdout`. Embedded SEs return it to the invoker.

**NOTE** — If the **xmyVar(ExitHandler)** variable (Section 6.6) is set, the *exitString* value is ignored when the script ends.

### Side Effects

Write summary events to script output.

## 7.2.8 xmyGetLine

### Syntax

```
xmyGetLine -text string -lineNumber integer
```

### Return

A string containing the requested data or the null string if *string* is null or *integer* is out of range.

### Description

The **xmyGetLine** command returns the “line” of *string* corresponding to *integer*. **xmyGetLine** expects *string* to contain embedded newline characters. Line numbers start at 1.

### Example

```
> set thirdLine [xmyGetLine -text "first\nsecond\nthird\n"
                 -lineNumber 3]
```

## 7.2.9 xmyLoadPkg

### Syntax

```
xmyLoadPkg packagename ?-relocateNow? ?-initFunc initFunc?
```

### Return

No result

### Description

The **xmyLoadPkg** command allows MYNAH and non-MYNAH extension packages to be loaded into a MYNAH SE. For standard MYNAH packages, only the (case-sensitive) logical package name must be specified. Table 7-2 lists the MYNAH package names that can be loaded.

**Table 7-2.** Loadable MYNAH Packages

Name
TermAsync
Term3270
TOP
PRT3270
ScriptExec
AppApp

It is assumed that MYNAH packages are in *\$XMYDIR/lib* and have a package initialization function with the following name:

```
xmy<logical package name>PkgAppInit
```

for example

```
xmyTerm3270PkgAppInit
```

To load a non-MYNAH extension package using **xmyLoadPkg**, it must exist in a shared library with a global initialization function with the following syntax:

```
int AppInit(Tcl_Interp *interp);
```

This initialization function should return `TCL_OK` on success, or `TCL_ERROR` otherwise.

**xmyLoadPkg** takes the following options:

- relocateNow** Causes all symbols to be resolved at load time, rather than when they are first accessed. This is useful when developing non-MYNAH packages.

**-initFunc** *initFunc* Specifies the name of the initialization function

**WARNING** — The initialization function for non-MYNAH packages should not contain the prefix “xmy”, since this is reserved for MYNAH packages.

There is no default search path for non-MYNAH packages, so the full path to the shared library should be specified as the *packagename* argument.

Subsequent calls to **xmyLoadPkg** for a package that is already loaded does nothing.

Subsequent calls to **xmyLoadPkg** for a non-MYNAH package result in the **AppInit** function being called again.

### Example

```
> xmyLoadPkg TermAsync
```

### Exceptions

- Missing/invalid arguments
- Package not found
- InitFunc (default or explicit) not found

## 7.2.10 xmyMask

**xmyMask** is a class command that is used to produce an instance of a mask object. A mask is used to denote some pattern of text that should be ignored during a **compare** execution. This pattern is a regular expression as defined for the **regex(3X)** program.

You may be working with an application that has screens containing dates, times, and sequence numbers. It becomes a problem during a **compare** execution when these dates, times, or sequence numbers appear within the regions to be compared. **xmyMask** provides a way of automatically masking out these dates, times, and sequence numbers.

**NOTE** — For more information on regular expressions, see the **regex(3X) Manual**.

Masks can be applied to any domain level compare commands that involve text regions. Sections 7.2.10.1 through 7.2.10.4 describe the methods used with the **xmyMask** command.

### 7.2.10.1 create

#### Syntax

```
xmyMask create -pattern pattern
```

#### Return

Handle to a mask instance

#### Description

The **create** method is used to create an instance of a mask object. The callback for **create** constructs an instance of the mask object class.

**create** takes the following option:

**-pattern *pattern*** Specifies the regular expression *pattern* to be associated with the mask.

When applied to an existing mask, **-pattern** becomes read-only (i.e., *pattern* is an invalid argument) and returns the current value.

## Example

This creates a mask that masks out dates that appear in the form *mm/dd/yy*.

```
> set dates [xmyMask create \  
-pattern {[0-1][0-9]/[0-3][0-9]/[0-9][0-9]}]  
.xmyMask_1  
  
> $dates -pattern  
[0-1][0-9]/[0-3][0-9]/[0-9][0-9]
```

This one creates a mask to mask out times that appear in the form *hh:mm:ss*.

```
> set times [xmyMask create \  
-pattern {[0-1][0-9]:[0-5][0-9]:[0-5][0-9]}]  
.xmyMask_2
```

You can get specific with your masks. For example, this would mask out dates that occur during the month of July during the 1990s, assuming the date appears in the form *JUL dd, 199y*:

```
> set JUL [xmyMask create \  
-pattern {JUL [0-3][0-9], 199[0-9]}]  
.xmyMask_3
```

### 7.2.10.2 destroy

#### Syntax

```
handle destroy
```

#### Return

No result

#### Description

The **destroy** method is used to destroy an instance of a mask object. Once the object has been destroyed its handle is removed from the Tcl name space. The callback for **destroy** destroys an instance of the mask object class.

#### Example

```
> $mask1 destroy
```



### 7.2.10.3 `disable`

#### **Syntax**

```
handle disable
```

#### **Return**

No result

#### **Description**

The **disable** method deactivates a previously enabled mask. After **disable** is called, no **compare** commands will recognize the pattern associated to the mask instance.

#### **Example**

```
> $mask disable
```

### 7.2.10.4 `enable`

#### **Syntax**

```
handle enable
```

#### **Return**

No result

#### **Description**

The **enable** method activates the mask instance so that all subsequent comparison commands within the script will ignore the pattern defined in the mask.

**NOTE** — A new mask is not enabled automatically at creation time. See [Section 7.2.10.1](#).

#### **Example**

```
> $mask1 enable
```

## 7.2.11 xmyPrint

### Syntax

```
xmyPrint ?-pkg pkg? ?-type type? ?-text text?
```

### Return

No result

### Description

The **xmyPrint** command lets you write to the *output* file in the script output directory. Lines are prepended with a time stamp and the category **user**. All fields are colon-separated.

**xmyPrint** takes the following options:

- pkg *pkg*** Specifies the MYNAH extension package for which you want to create output.
- type *type*** Specifies a keyword used to identify the type of output to create.
- text *text*** Specifies the text to write to the *output* file.

### Example

```
> xmyPrint -type "problem" -text "script shouldn't be here"
```

would produce a line similar to the following in the *output* file:

```
19951208:140000:user::problem:script shouldn't be here
```

Note the double colons delimiting the unspecified **pkg** field.

### Exceptions

- Missing/invalid arguments
- Print operation failure.

## 7.2.12 xmyPrompt

### Syntax

```
xmyPrompt [list {keylset_list}]
```

### Return

Input provided by user as a list of strings

### Description

The **xmyPrompt** command lets a script data from you at script execution time. It takes a list of keyed lists as an argument. (See the **tclhelp** facility for a description of keyed lists.) Each sublist describes one line of the prompt window that is displayed. This command is only useful in embedded SEs, since background and standalone SEs do not have GUIs. If **xmyPrompt** is executed in a background SE, it returns an empty list.

The *keylset\_list* items are created using the TclX **keylset** command, which has the syntax

```
keylset listvar key value ?key2 value2 ...?
```

**xmyPrompt** uses the following **keylset** options:

- |                                     |   |
|-------------------------------------|---|
| <b>-prompt <i>promptString</i></b>  | Specifies the prompt to display in the prompt window.   |
| <b>-default <i>defaultValue</i></b> | Specifies a default data to enter at the prompt.  |
| <b>-echo <i>echoFlag</i></b>        | Specifies whether the entered response to the prompt will be echoed back to the prompt window. The default is TRUE. |

**NOTE** — A keyed list passed to **xmyPrompt** can contain any number of other tag-value pairs, but any pairs besides the ones listed above will be ignored by **xmyPrompt**. However, you can enter the prompt data into larger keyed lists that they are using for other reasons.

### Example

```
> keylset a -prompt logid -default wunn  
> keylset c -prompt password -echo false  
> keylset d -prompt "other logid" -default madmin  
> set result [xmyPrompt [list $a $c $d]]
```

### Exceptions

Missing/invalid arguments

## 7.2.13 xmyReadGrep

### Syntax

```
xmyReadGrep -fd fd -selection selection ?-var variable?
```

### Return

Line from file if *variable* is not specified.

Number of characters read if *variable* is specified.

### Description

The **xmyReadGrep** command reads the next line from *fd* that matches *selection* (a regular expression), and discards the line's terminating newline.

**xmyReadGrep** takes the following options:

- |                                    |  |
|------------------------------------|--|
| <b>-fd <i>fd</i></b>               | Specifies the file to search for the specified <i>selection</i> . This must be a <i>fileid</i> that was created when you opened a file using the Tcl <b>open</b> command.  |
|                                    | <b>Note</b> — You can save the <i>fileid</i> to a variable and use this variable to specify the file.  |
| <b>-selection <i>selection</i></b> | Specifies the <i>selection</i> to search for in the specified field. <ul style="list-style-type: none"><li>• If <b>-var <i>variable</i></b> is specified, the matching line is placed in <i>variable</i> and the return value is the number of characters on the matching line;</li><li>• If no line matches, <i>variable</i> is set to the empty string and -1 is returned;</li><li>• If <b>-var <i>variable</i></b> is not specified then the matching line (or the NULL string if no line matches) is returned.</li></ul> |
| <b>-var <i>variable</i></b>        | Specifies a variable to contain the matched text. The matching line (or Null string, if no line matches) is placed in <i>variable</i> and its length (or -1 if no line matches) is returned.   |

Each application on a particular file begins reading at the line after the last line returned.

By default, each **xmyReadGrep** application on a particular file begins reading at the line after the last line returned. Thus, if your script requires multiple **xmyReadGrep** commands, you must determine how you want your script to resume searching.

- If you want your script to search from the beginning of the file, perform one of the following:
  - Close the file after an **xmyReadGrep** application and re-open the file before the next **xmyReadGrep** application
  - Rewind the open file using the Tcl **seek** command.

**NOTE** — The **seek** method is faster than the opening and closing files method.

- If you want your script to begin searching after the last line that was previously read, do not close the file until all **xmyReadGrep** applications are executed. Do not use the **seek** command between applications.

It is best to close the file before exiting the script since engines running in *FullState* mode do not close file descriptors at script completion time and since there is a limit on the number of open file descriptors a script can have at one time.

### Example

In this example, you open the file *test.tcl*, saving the generated *fileid* to the variable *open\_file*, and you then use this variable as the *fd* argument to the **-fd** attribute.

```
> set open_file [open test.tcl]
file10
> xmyReadGrep -fd $open_file -selection OutputLevel
```

Here you check the return value of the **xmyReadGrep** command to see if a string of text was found.

**NOTE** — The next check is for the null return code ("") because the **-var** attribute was omitted.

```
> set file [open script1.tcl]
file11
> set retvalue [xmyReadGrep -fd $file -selection "hello world"]
11
> if {$result == ""} {
    xmyPrint -text "not found"
    return
}
```

This example performs the same function as the previous one, but also saves the results to the variable *varname*.

**NOTE** — The next check is for the return code -1 because the **-var** attribute was specified.

```
> set retval [xmyReadGrep -fd $file -selection "hello world" \  
             -var varname]  
11  
> if {$retval == -1} {  
    puts -text "not found"  
}
```

This is an example of using the **seek** command to rewind the file.

**NOTE** — The file is closed after the final **xmyReadGrep**.

```
> set ifd [open /home/user1/myfile]  
file1  
> set retval [xmyReadGrep -fd $ifd -selection "hello world" \  
             -var outputvar]  
11  
> seek $ifd 0  
> set retval [xmyReadGrep -fd $ifd -selection ".ello \[wW\]orld" \  
             -var outputvar]  
11  
> close $ifd
```

This is an example of using the **close** command to rewind the file.

```
> set ifd [open /home/user1/myfile]  
file1  
> set retval [xmyReadGrep -fd $ifd -selection "hello world" \  
             -var outputvar]  
11  
> close $ifd  
> set ifd [open /home/user1/myfile]  
file1  
> set retval [xmyReadGrep -fd $ifd -selection ".ello \[wW\]orld" \  
             -var outputvar]  
11
```

## Exceptions

Missing/invalid arguments

## 7.2.14 xmyRegex

### Syntax

```
xmyRegex -regExp regExp -data data ?-offset offset?  
          ?-location location? ?-length length?  
          ?-label label? ?-warning?
```

### Return

1 if regular expression found

0 otherwise

### Description

The **xmyRegex** command searches for a regular expression in the given input *data* string at *offset* characters into *data*. If the regular expression is found, the offset from the beginning of the data is returned in *location* and the length is returned in *length*.

**xmyRegex** updates the script **compare** variables (**xmyVar(GoodCompares)**, **xmyVar(FailedCompares)**, and **xmyVar(WarningCompares)**) depending on whether it finds the regular expression in the input data

**xmyRegex** takes the following options

<b>-regExp <i>regExp</i></b>	Specifies the regular expression to search for.
<b>-data <i>data</i></b>	Specifies the data string to search.
<b>-offset <i>offset</i></b>	Specifies the offset into the data string in which to search.
<b>-location <i>location</i></b>	Specifies a variable to contain the location of the offset from the beginning of the data where the regular expression was found.
<b>-length <i>length</i></b>	Specifies a variable for the length of the matched expression.
<b>-label <i>label</i></b>	Specifies a label that will appear in the <i>output</i> file's compare event.
<b>-warning</b>	Specifies that a non-match should increment <b>xmyVar(WarningCompares)</b> instead of <b>xmyVar(FailedCompares)</b> .

**NOTE** — For the **-location** and **-length** options if there is no match, the **-location** and **-length** variables are not touched. If these variables are unset before the call to **xmyRegex**, then they will not exist in the Tcl interpreter after the call to **xmyRegex** if there was no match. If you then try to print them, the script will exit with an error

code. You should put the `xmyRegex` command in an `if` statement (see example) or set the length and location variables to, say, the null string.

### Side Effects

**xmyRegex** writes results to the *compares* file and writes a **compare** event to the *output* file.

### Example

```
> if {[xmyRegex -regExp "searchstring*" -data $inputstring \  
    -offset 10 -location loc -length len]} {  
    puts "found at location $loc"  
    puts "with length $len"  
}
```

### Exceptions

Missing/invalid arguments



## 7.2.15 xmySimilar

### Syntax

```
xmySimilar -value1 value1 -value2 value2 \  
          -percentage percentage
```

### Return

1 if values differ by no more than the percentage specified  
0 otherwise

### Description

The **xmySimilar** command compares numbers to see if they differ by less than a given percentage. It does not update **xmyVar(GoodCompares)** or **xmyVar(FailedCompares)**.

**NOTE** — The percentage used by the algorithm is the specified percent of the average of the two values supplied by the user, and hence it does not matter what order the values are given in.

**xmySimilar** takes the following options:

- |                                      |   |
|--------------------------------------|---|
| <b>-value1</b> <i>value1</i>         | Specifies the first number to compare.  |
| <b>-value2</b> <i>value2</i>         | Specifies the number to compare with <i>value1</i>  |
| <b>-percentage</b> <i>percentage</i> | Specifies the percentage by which <i>value1</i> and <i>value2</i> are expected to differ. |

### Example

```
> xmySimilar -value1 $result1 -value2 $result2 -percentage 5
```

### Exceptions

Missing/invalid arguments

## 7.2.16 xmySleep

### Syntax

```
xmySleep seconds
```

### Return

No result

### Description

The **xmySleep** command pauses the script for the indicated number of seconds. Data from the SUT and Telexel messages are received by the SE while **xmySleep** is active.

**NOTE** — If a value for “seconds” is given that is too large, the MYNAH System will use the largest value possible under the current operating system. What this number is will depend on which hardware and operating system the MYNAH System runs.

### Example

```
> xmySleep 10
```

### Exceptions

Missing/invalid argument.

## 7.2.17 xmySource

### Syntax

```
xmySource ?-prependScriptDir? filename
```

### Return

No result

### Description

The **xmySource** command reads in the file *filename* and sends it to a Tcl interpreter as a script.

Sourcing a script with this command (rather than the standard Tcl **source** command) automatically turns the **xmyVar(OutputLevel)** down low so that no output is written to the output file during the sourcing process, thus reducing the amount of output generated.

**xmySource** takes the following option:

<b>-prependScriptDir</b>	Takes the Compare Master file ( <a href="#">Section 5</a> ) from the same directory as the script directory.
--------------------------	--

### Example

```
> xmySource asnyc_script.1
```

## 7.2.18 xmySymTblDel

### Syntax

```
xmySymTblDel -tag variable
```

### Returns

0 if the tag was not in the symbol table, 1 otherwise

### Description

The **xmySymTblDel** command removes the tag/value pair referenced by **-tag *variable*** from the symbol table. Symbol table changes (including deletions) in a child script are propagated to the parent script when the child script finishes.

### Exception

Missing/invalid argument

### Example

```
> if {[xmySymTblDel -tag logid]} {  
    xmyPrint -text "tag $logid found and deleted"  
} else {  
    xmyPrint -text "tag $logid does not exist in the symbol table"  
}
```

## 7.2.19 xmySymTblExists

### Syntax

```
xmySymTblExists -tag variable
```

### Return

1 if the named variable exists in the MYNAH symbol table

0 otherwise

### Description

The **xmySymTblExists** command determines if a variable, specified by **-tag *variable***, exists in the MYNAH symbol table. Since a variable can have a null value, calling **xmySymTblGet** does not determine whether the variable exists.

### Example

The following example reuses the example system table we used for **xmyVar(SymTbl)** (Section 6.18). Since the tag **Conn** exists in the table, **xmySymTblExists** returns a 1, but since the tag **login** does not exist, a 0 is returned.

**NOTE** — Remember, tag/value pairs are entered using **xmySymTblPut** (Section 7.2.21).

```
> set Conn [xmyTerm3270 connect]
.xmyTerm3270_1
> xmySymTblPut -tag Conn -value $Conn
> set xmyVar(SymTbl)
> xmySymTblPut -tag test -value 42
> set xmyVar(SymTbl)
{Conn .xmyTerm3270_1} {test 42}

> xmySymTblExists -tag Conn
1
> xmySymTblExists -tag login
0
```

## 7.2.20 xmySymTblGet

### Syntax

```
xmySymTblGet -tag variable
```

### Return

Value of *variable* or " " if not found.

### Description

The **xmySymTblGet** command retrieves the value of *variable* from the symbol table. Since variables can have null values, there is no indication that an invalid variable name was specified.

You can use **xmySymTblExists** to test if a variable exists.

### Example

```
> xmySymTblGet -tag Conn  
.xmyTerm3270_1
```

### Exceptions

Missing/invalid argument

## 7.2.21 xmySymTblPut

### Syntax

```
xmySymTblPut -tag variable ?-value value?
```

### Return

No result

### Description

The **xmySymTblPut** command lets you add or change values in the symbol table and takes the following options:

- tag *variable*** Specifies the name of the tag in the symbol table to added or changed.
- value *value*** Specifies the value of the tag in the symbol table to added or changed.

Putting a value into the symbol table is equivalent to exporting a variable in versions of MYNAH prior to 5.0. The null string (“”) is the default value if the value is not supplied.

### Example

```
> set Conn [xmyTerm3270 connect]
.xmyTerm3270_1
> xmySymTblPut -tag Conn -value $Conn
> set xmyVar(SymTbl)
> xmySymTblPut -tag test -value 42
> set xmyVar(SymTbl)
{Conn .xmyTerm3270_1} {test 42}

> xmySymTblExists -tag Conn
1
> xmySymTblExists -tag login
0

> xmySymTblPut -tag login -value 22
> xmySymTblPut -tag hello -value 3
> xmySymTblPut -tag test -value 42
```

### Exceptions

- Missing/invalid argument
- Insert Failure

## 7.2.22 xmyUnloadPkg

### Syntax

```
xmyUnloadPkg packagename
```

### Return

No result

### Description

The **xmyUnloadPkg** command removes the named extension package from the SE. Using **xmyUnloadPkg** reduces the size of the Tcl name space slightly. In most situations it will be unnecessary. **xmyUnloadPkg** deletes the underlying package if the name matches one of the loaded MYNAH packages.

### Example

```
> xmyUnloadPkg TermAsync
```

### Exceptions

- Missing/invalid argument
- Package not loaded



## 7.2.23 xmyUpdateResult

### Syntax

```
xmyUpdateResult ?-testid testId? -status string
```

### Return

No result

### Description

The **xmyUpdateResult** command lets you update the status for the Result object. **xmyUpdateResult** takes the following options:

- testID *testID*** Specifies the *testid* to use. If *testid* is not specified, the “current” *testid* is used. The “current” *testid* is contained in the closest enclosing **xmyBegin** command.
- status *string*** Specifies a status used to override the default status provided by the SE, which is based solely on counts of bad and warning **compare** statements. The *string* must be “unsuccessful”, “inconclusive” or “successful”.

### Example

```
> xmyBegin -testid 200
> if { $xmyVar(failedCompares) > 17 } {
    xmyUpdateResult -status "unsuccessful"
    xmyEnd -testid 200
    exit "max failedCompares"
}
> xmyEnd -testid 200
```

### Exceptions

- Missing/invalid arguments
- No testid specified outside of an **xmyBegin/xmyEnd** block

## 7.3 Encryption Utilities

The MYNAH System includes several utilities that are used to work with encrypted files. These are the **xmyUdb** command and the CLUI's **xmyCmd scramble** sub-command.

### 7.3.1 xmyUdb

#### Syntax

```
xmyUdb read -file filename ?-decrypt ?-key key?  
xmyUdb write -list list -file filename \  
            ?-encrypt ?-key key?
```

#### Returns

**xmyUdb read** returns a keyed list representing the contents of file *filename*.

**xmyUdb write** returns nothing.

#### Description

The first form of the **xmyUdb** language command reads a user database from a flat file and places it into a keyed list. The subcommand **read** must precede the other arguments. This form takes the following arguments:

- file *filename*** Contains the name of the file to be read. If just a file name is given, it is assumed to be in the SE's run directory (\$XMYHOME/run/se), otherwise the user must give a full path (starting with '/'). This argument is required.
- decrypt** Instructs **xmyUdb** to decode the file before reading it.
- key *key*** Specifies the (scrambled or unscrambled) **key** to be used to decode the file before reading it. The xmyUdb read command uses the key length to determine whether it is scrambled and unscrambles it automatically before using it. If **-decrypt** is specified but a key is not provided, xmyUdb attempts to retrieve a key from the MYNAH configuration file **Engine** option **Key**.

The second form of **xmyUdb** writes a user database to the specified file. This form takes the following arguments:

- file *filename*** Contains the name of the file to which you want to write the database. If just a file name is given, it is assumed to be in the SE's run directory (\$XMYHOME/run/se), otherwise the user must give a full path. This argument is required.

- list *list*** Specifies the keyed list to be written. The argument must be the name of a variable, without the “\$” before it. This argument is required.
- encrypt** Causes the file to be encoded before being written.
- key *key*** Specifies the (scrambled or unscrambled) *key* to be used to encode the file before writing it. The xmyUdb write command uses the key length to determine whether it is scrambled and unscrambles it automatically before using it. If **-decrypt** is specified but a key is not provided, xmyUdb attempts to retrieve a key from the MYNAH configuration file **Engine** option **Key**.

The unencrypted form of the file created by **xmyUdb** write and read by **xmyUdb** contains lines of ASCII data, where each line contains a tag and a value separated by space or tab characters.

**NOTE —** **-key** can only be specified with **-decrypt** or **-encrypt**. It can not be specified separately.

### Example

```
> set pwords [xmyUdb read -file $env(XMYHOME)/lib/pwords \  
             -decrypt]  
  
> set firstPassword [keylget pwords firstPassword]  
  
> xmyUdb write -list $pwords \  
             -file $env(XMYHOME)/lib/passwords \  
             -encrypt
```

### Exceptions

- Missing/invalid argument
- File not found
- Encryption/decryption failed
- Key not found

### 7.3.2 xmyCmd scramble

#### Syntax

```
xmyCmd scramble ?-k key? ?output-file?
```

#### Description

The **scramble** CLUI sub-command lets you encrypt the key associated with a script. The scrambled keys can only be unscrambled by an SE.

**scramble** takes the following options:

- |                           |  |
|---------------------------|--|
| <b>-k <i>key</i></b>      | Specifies the <i>key</i> to be saved. A key can only have a maximum of eight characters.<br><br>If this option is not used, you are prompted for the key.    |
| <b><i>output-file</i></b> | Specifies the name of the file to which the scrambled key is to be written. If this option is not used, the scrambled key is written to the standard output. |

#### Examples

In this example, you specify the key, and **xmyCmd scramble** generates the scrambled key.

```
> xmyCmd scramble -k desKey  
f; ;.W>+tv
```

This time you do not specify the key, and **xmyCmd scramble** prompts you to enter the key.

```
> xmyCmd scramble  
(No need to precede special characters with a backslash)  
Enter key (8 char max): cryptKey  
h<.(2/Y@-
```

## 7.4 Performance Measurement Functions

There are no specific Tcl language commands for measuring performance. Instead, SUT timing events in the script output file and the **xmyPrint** command are used to gather timing data. For example, the following code fragment times a set of operations:

```
> set startTime [xmyDate]
> $conn send pfl          # send keys to the SUT
> $conn wait
> $conn send pf3
> $conn wait
> xmyPrint -type "timing" -text "start time: $startTime"
> xmyPrint -type "timing" -text "end time: [expr\
    [xmyDate]-$startTime]"
```



## 8. Child Script Extension Package

This section describes the set of Tcl extensions for the Child Script Package, which is used to start and control script execution from a parent script, implementing requests for script execution on remote SEs.

**NOTE** — To access the Child Script Package you must first run **xmyLoadPkg ScriptExec**.

**xmySE** is the class command used to create connections to the BEE. [Table 8-1](#) lists the methods used by **xmySE** to work with connections.

**Table 8-1.** xmySE (Child Script) Methods

Method	Description	Section
<b>connect</b>	Creates a connection to the background execution environment.	8.2, <a href="#">Page 8-2</a>
<b>cancel</b>	Cancels the asynchronous request.	8.2.1, <a href="#">Page 8-4</a>
<b>destroy</b>	Deletes the associated message object.	8.2.2, <a href="#">Page 8-5</a>
<b>pause</b>	Temporarily disables the request associated with the message object.	8.2.3, <a href="#">Page 8-6</a>
<b>resume</b>	Restarts a paused child script.	8.2.4, <a href="#">Page 8-7</a>
<b>send</b>	Sends a child script execution request.	8.2.5, <a href="#">Page 8-8</a>
<b>sendWait</b>	Sends a request for child script execution and waits for a response.	8.2.6, <a href="#">Page 8-9</a>
<b>wait</b>	Waits until a reply is received or a timeout occurs.	8.2.7, <a href="#">Page 8-10</a>

**xmySE**, when used with either the **waitAll** ([Section 8.3](#)) or the **waitAny** ([Section 8.4](#)) method, is also used to freeze the parent script until the appropriate response is received.

## 8.1 Child Script Connection Methods

This section describes the methods used to work with Child Script connections.

## 8.2 connect

### Syntax

```
xmySE connect ?-sd sdName? ?-se seGroupName?  
?-timeout timeout?
```

### Return

A handle to the connection used by subsequent **send** and **sendWait** methods.

### Description

The **xmySE connect** method creates a connection to the BEE. **connect** optionally takes the name of the SD and the SE group to which the parent script wants to send requests.

**NOTE** — Only 24 connections can be open at a given time from a single script execution. If a script opens more than 24 scripts at one time, scripts from a standalone engine will hang and scripts running from a background engine will fail.

**connect** accepts the following options:

- |                                |  |
|--------------------------------|--|
| <b>-sd <i>sdName</i></b>       | Specifies the name of the SD to use when creating a connection. If this is not specified, <b>connect</b> uses the default from the MYNAH <i>xmyConfig</i> file.<br><br>This option is only useful when its package is being used by the GUI process, since an SE cannot send to other SDs. |
| <b>-se <i>seGroupName</i></b>  | Specifies the name of the SE group to use when creating a connection. If this is not specified and you are running <b>connect</b> in the Script Builder, the environment variable XMYSEGROUP must be set to the desired SE Group, e.g., XMYSEGROUP=SeGp1.                                  |
| <b>-timeout <i>timeout</i></b> | Determines how long future <b>wait</b> and <b>sendWait</b> commands will wait for the child script to complete executing before aborting. If you do not specify a <i>timeout</i> , this option will default to 30 minutes.   |



### Example

```
> set hSE [xmySE connect -timeout 10]
.xmySE_1
```

### Exceptions

- Invalid/missing arguments
- Telexel connect failure

## 8.2.1 **cancel**

### **Syntax**

```
msgHandle cancel
```

### **Return**

No result

### **Description**

The **cancel** method cancels the asynchronous request associated with the message object handle. On return, the message object is deleted.

### **Example**

```
> $hSE cancel
```

## 8.2.2 **destroy**

### **Syntax**

```
msgHandle destroy
```

### **Return**

No result

### **Description**

The **destroy** method deletes the associated message object. It does not send a request to the child script.

**NOTE** — Destroy should only be used for message objects created using the send command. It should not be used after sendWait command as sendWait does not create any message object.

### **Example**

```
> $hSE destroy
```

### 8.2.3 **pause**

#### **Syntax**

*msgHandle* pause

#### **Return**

No result

#### **Description**

The **pause** method pauses a child script. While the child script is paused the parent continues to execute. It is not an error to call **pause** more than once for the same script.

#### **Example**

```
> $hSE pause
```

## 8.2.4 resume

### Syntax

```
msgHandle resume
```

### Return

No result

### Description

The **resume** method restarts a paused child script. It is not an error to call **resume** more than once for the same script.

### Example

```
> $hSE resume
```

## 8.2.5 send

### Syntax

```
handle send -script scriptName
```

### Return

A handle to a message object used to identify the outstanding request.

### Description

The **send** method sends a child script execution request. The current symbol table is passed with the request.

**NOTE** — The symbol table can not be passed between SEs running on different dispatchers.

**send** accepts the following option:

- script *scriptName*** Specifies the name of the child script to execute.
- The **scriptName** can be a full path, a relative path, or a base file name. Relative paths, such as *./script1.tcl* or *../script1.tcl*, are assumed to be relative to the paths specified in the *xmyConfig* file's **LibraryPath** option. Base files names are also assumed to be in one of the **LibraryPath** directories.
- Specifying a **scriptName** starting with "/" turns off **LibraryPath** searching.

The **send** command returns immediately.

### Exceptions

- Invalid/missing arguments
- Telexel Send operation failure
- Timeout

## 8.2.6 sendWait

### Syntax

```
handle sendWait -script scriptName  
                ?-timeout timeout?
```

### Return

The exit string of the child script

### Description

This **sendWait** method sends a request for child script execution and waits for a response, which is a message indicating that the child script has completed executing. The response contains any new or changed symbol table variables. **sendWait** updates the parent script symbol table before returning.

**sendwait** accepts the following options:

- script *scriptName*** Specifies the name of the child script to execute.
- The **scriptName** can be a full path, a relative path, or a base file name. Relative paths, such as *./script1.tcl* or *../script1.tcl*, are assumed to be relative to the paths specified in the *xmyConfig* file's **LibraryPath** option. Base files names are also assumed to be in one of the **LibraryPath** directories.
- Specifying a **scriptName** starting with "/" turns off **LibraryPath** searching.
- timeout *timeout*** Gives you the option of specifying the amount of time to wait for a response before aborting.
- Default = 1 hour.

The **send** and **sendWait** methods compose and send a request to the SD.

The symbol table passed to the child script is the same as the current symbol table in the parent script.

### Exceptions

- Invalid/missing arguments
- Telexel Send failure
- Timeout

### Side Effects

The symbol table is updated with new and changed values from the child script.

## 8.2.7 wait

### Syntax

```
msgHandle wait ?-timeout timeout?
```

### Return

The exit string of the child script.

### Description

The **wait** method waits until timeout is reached or a reply to the outstanding **send** is received, which is a message indicating that the child script has completed executing. *handle* is a message object identifier.

Timeout specifies the maximum amount of time to wait for a response.

### Exceptions

- Missing/invalid arguments
- Timeout

### Side Effects

The symbol table is updated with new and changed values from the child script.



### 8.3 xmySE waitAll

#### Syntax

```
xmySE waitAll ?-messages {msgHandle1 ... handleN}?\  
?-timeout timeout?
```

#### Return

No return

#### Description

The **xmySE waitAll** method blocks the parent script until all of the requested child scripts complete or the timeout expires.

**xmySE waitAll** accepts the following options:

- messages {handle1 ... handleN}** Specifies the handle(s) associated with a script(s). The argument to **-messages** is a Tcl list of message handles. If **-messages** is not specified, **waitAll** blocks until replies are received for all child script execution requests.
- timeout timeout** Specifies the amount of time to wait for a response before aborting. The default is 1800 seconds.

For each specified message, script compare counts and the symbol table are only updated the first time the reply to the send request is seen. A reply is “seen” when it is waited on. Therefore it is safe to wait on the same message more than once. For example, after **waitAll** returns, the **wait** method can be used to retrieve the Tcl interpreter result for a specific send request.

#### Exceptions

- Nonexistent message handle specified
- No send requests to wait for
- Timeout
- Script cancelled while waiting

## 8.4 xmySE waitAny

### Syntax

```
xmySE waitAny ?-messages {msgHandle1 ... handleN}?\  
?-timeout timeout?
```

### Return

The message handle associated with the script that completed

### Description

The **xmySE waitAny** method blocks the parent script until one of the requested child scripts completes or the timeout expires.

**xmySE waitAny** accepts the following options:

- messages {handle1 ... handleN}** Specifies the handle(s) associated with a script(s). The argument to **-messages** is a Tcl list of message handles. If **-messages** is not specified, **waitAny** defaults to any child script request (even requests that have already been waited on.)
- timeout *timeout*** Specifies the amount of time to wait for a response before aborting. The default is 1800 seconds.

For each specified message, script compare counts and the symbol table are only updated the first time the reply to the send request is seen. A reply is “seen” when it is waited on. Therefore it is safe to wait on the same message more than once.

For example, after **waitAny** returns, the **wait** method can be used to retrieve the Tcl interpreter result for the child script that finished.

Each invocation of **waitAny** is completely independent, meaning that multiple invocations of **waitAny** with the same message list will each return the same message handle.

### Exceptions

- Nonexistent message handle specified
- No send requests to wait for
- Timeout
- Script cancelled while waiting
- Execution results in FMM reply improperly formatted
- Execution results missing data

## **8.5 General Child Script Concerns**

There are several concerns to keep in mind when you execute Child Scripts.

### **8.5.1 Deadlock**

Deadlock can occur if Parent Scripts and Child Scripts are executed on the same engine group and the Parent Scripts are using up all of the Script Engines. If this happens, competing Parent Scripts can't run Child Scripts. To avoid this resource deadlock, Parent Scripts should be executed on separate engine groups from Child Scripts.

### **8.5.2 Zombie Processes**

A Zombie process can occur when a Child Script is submitted in parallel to the execution of a Parent Script, which completes before the child. This is not a harmful situation.



## 9. TermAsync Extension Package

### 9.1 Overview

The TermAsync Extension Package provides the functions necessary for interactions with the asynchronous terminal device. This package provides emulation of the vt100 terminal as well as partial emulation of other terminals, based upon the system terminfo database.

**NOTE** — To access the TermAsync Extension Package you must first run **xmyLoadPkg TermAsync**.

The following is the list of commands in the MYNAB TermAsync Extension Package.

#### 9.1.1 Methods Overview

[Section 9.5.1](#) contains detailed descriptions of the TermAsync Method extensions. The extensions are listed in alphabetical order (within each category). [Table 9-1](#) lists the extensions, organizing them in general functional categories. [Table 9-1](#) also gives a brief description of each extension and the section where the detailed description can be found.

**Table 9-1.** TermAsync Method Extensions (Sheet 1 of 2)

Category	Method	Description	Section
<b>Connection</b>	<b>connect</b>	Establishes a connection to the asynchronous host from the MYNAB Tcl script.	<a href="#">9.5.1.2,</a> <a href="#">Page 9–9</a>
	<b>disconnect</b>	Destroys a connection made to the host through the <b>connect</b> method.	<a href="#">9.5.1.4,</a> <a href="#">Page 9–12</a>
<b>Data Entry/Retrieval</b>	<b>response</b>	Returns the latest response of the application.	<a href="#">9.5.1.8,</a> <a href="#">Page 9–16</a>
	<b>send</b>	Sends a string to the SUT.	<a href="#">9.5.1.10,</a> <a href="#">Page 9–20</a>
	<b>screen</b>	Returns a list of strings that represents a screen image.	<a href="#">9.5.1.9,</a> <a href="#">Page 9–18</a>
<b>Comparisons</b>	<b>compare</b>	Compares a region of an asynchronous screen with a compare pattern body.	<a href="#">9.5.1.1,</a> <a href="#">Page 9–7</a>
	<b>disableMask</b>	Disables a mask object.	<a href="#">9.5.1.3,</a> <a href="#">Page 9–11</a>
	<b>enableMask</b>	Enables an already created mask object for a particular connection instance.	<a href="#">9.5.1.5,</a> <a href="#">Page 9–13</a>

**Table 9-1.** TermAsync Method Extensions (Sheet 2 of 2)

Category	Method	Description	Section
<b>Waiting</b>	<b>sendWait</b>	Sends a string to the SUT and waits until a second string is returned from the SUT.	<a href="#">9.5.1.11, Page 9–22</a>
	<b>wait</b>	Stops script execution until a condition is verified or a timeout occurs.	<a href="#">9.5.1.12, Page 9–23</a>
<b>Attributes</b>	<b>getAttributes</b>	Returns the attribute (e.g., blinking, highlighted, etc.) value at specified position.	<a href="#">9.5.1.6, Page 9–14</a>
	<b>listAttributeTypes</b>	Returns the list of valid attributes.	<a href="#">9.5.1.7, Page 9–15</a>

### 9.1.2 Attributes Overview

[Section 9.5.2](#) contains detailed descriptions of the TermAsync Attribute extensions. The extensions are listed in alphabetical order. [Table 9-2](#) lists the extensions, organizing them in general functional categories. [Table 9-2](#) also gives a brief description of each extension and the section where the detailed description can be found.

**Table 9-2.** TermAsync Attribute Extensions (Sheet 1 of 2)

Category	Method	Description	Section
<b>Connection</b>	<b>-connections</b>	Returns a list of asynchronous connections.	<a href="#">9.5.2.3, Page 9–26</a>
	<b>-name</b>	Returns the name of the connection.	<a href="#">9.5.2.8, Page 9–27</a>
	<b>-shell</b>	Returns the start-up shell.	<a href="#">9.5.2.12, Page 9–28</a>
	<b>-status</b>	Returns the status of the connection.	<a href="#">9.5.2.15, Page 9–29</a>
	<b>-terminal</b>	Returns the terminal being emulated.	<a href="#">9.5.2.16, Page 9–30</a>
	<b>-terminfo</b>	Returns the file name of the auxiliary <i>terminfo</i> file.	<a href="#">9.5.2.17, Page 9–30</a>

**Table 9-2.** TermAsync Attribute Extensions (Sheet 2 of 2)

Category	Method	Description	Section
<b>Data Entry/Retrieval</b>	<b>-bufferlen</b>	Returns the size of the buffer that caches SUT responses.	9.5.2.1, Page 9–25
	<b>-delay</b>	Returns or sets the number of milliseconds used as padding in the <b>send</b> statement.	9.5.2.4, Page 9–26
	<b>-size</b>	Returns the size of the screen.	9.5.2.14, Page 9–29
<b>Location</b>	<b>-column</b>	Returns the cursor's current column position.	9.5.2.2, Page 9–25
	<b>-position</b>	Returns the row and column position of the cursor.	9.5.2.9, Page 9–28
	<b>-row</b>	Returns the cursor's current row position.	9.5.2.11, Page 9–28
<b>Comparisons</b>	<b>-failedCompares</b>	Returns or sets the number of failed compares.	9.5.2.5, Page 9–26
	<b>-goodCompares</b>	Returns or sets the number of successful compares.	9.5.2.6, Page 9–27
	<b>-masks</b>	Returns a list of enabled masks for a connection	9.5.2.7, Page 9–27
	<b>-warningCompares</b>	Returns or sets the number of user defined warnings.	9.5.2.19, Page 9–30
	<b>-wildcard</b>	Returns or sets the default comparison wildcard character.	9.5.2.20, Page 9–31
<b>Waiting</b>	<b>-prompt</b>	Returns or sets the default waiting string.	9.5.2.10, Page 9–28
	<b>-timeout</b>	Returns or sets the default number of seconds to wait for a SUT response.	9.5.2.18, Page 9–30
<b>Attributes</b>	<b>-showAttributes</b>	Returns or sets what character attributes are to be included in the <i>SUTimage</i> file.	9.5.2.13, Page 9–29

## 9.2 System Prompts

UNIX prompts often differ from installation to installation. What prompts are expected also differ if you execute scripts in the background or the foreground.

**NOTE** — This section uses the TermAsync method **sendWait** to illustrate these techniques. Briefly, **sendWait** sends a string, such as a login id or a UNIX command, to the connection and waits until an expected string is returned, such as

```
sendWait "ls\r" -expect "\$ "
```

In this case, **sendWait** send the **ls** command and waits until it receives the \$ prompt. For a complete explanation of **sendWait** see [Section 9.5.1.11](#).

As you use the Script Builder to capture an emulated connection, it automatically generates a **sendWait** statement each time you enter a command, such as **ls** or **ftp**, entering the prompt sign it encounters as the expected string. The Script Builder determines the prompt to be the shortest sub-string from the end of the response that is unique (i.e., only one occurrence in the response). An example would be the prompt for an ftp session, `ftp>`, for which **sendWait** would enter `"> "` as the expected string, ignoring the system id.

If you then run the script using the Script Builder, this is no problem since you created the script in the foreground and are executing it in the foreground; the same prompt is expected. If you execute the script in the background, however, this can cause problems since the system may assume the local prompt sign is the UNIX default prompt, the dollar sign (\$). If your local prompt sign is different, your script will fail since it is waiting for a response it will not receive.

You can simply change all expected strings for a local connection to the dollar prompt. If you use the script to connect to a remote system (such as via **telnet** or **ftp**), you will not have to do this; the system will expect the prompt the Script Builder generated.

There is always the possibility, however, that there may be discrepancies between the expected prompt and the actual prompt. If you want to be completely sure that the prompts will match, you can use your script to specify the prompt by adding a line similar to

```
sendWait "PS1=\"\$ \"\r" -expect "\$ "
```

immediately after the TermAsync **connect** method. (See [Section 9.5.1.2](#) for information on the **connect** method).

The following script automates an anonymous **ftp** session. The lines up to the line where we send the **ftp** command are all on the local system. To ensure that the actual and expected prompt match, we add the above line to export the `PS1` variable. The other lines (up to the **bye**, which closes the **ftp** connection) all expect the prompt you would encounter during an **ftp** session; they would not expect the prompt we exported.

---



```
xmyLoadPkg TermAsync
set conn2 [xmyTermAsync connect]
$conn2 wait {[$conn2 response -numberOfCharacters] >= 1}
$conn2 sendWait "PS1=\"\`\" -expect "\"
$conn2 wait -expect "\"
$conn2 sendWait "cd /users/kjb/NEW\r" -expect "\"
$conn2 sendWait "ftp fake_ftp.com\r" -expect ":"
$conn2 sendWait "anonymous\r" -expect "d:"
$conn2 sendWait "kjb@\r" -expect "> "
$conn2 sendWait "cd pub/new_this_week\r" -expect "> "
$conn2 sendWait "prompt\r" -expect "> "
$conn2 sendWait "mget *\r" -expect "> "
$conn2 sendWait "bye\r" -expect "\"
$conn2 disconnect
xmyExit
```

Where you enter the line to change the PS1 variable is very important. When the Script Builder creates a connection, it immediately generates a **wait** statement as in

```
set conn2 [xmyTermAsync connect]
$conn2 wait -expect ":"
```

You must place the line to change the PS1 variable between these two lines, and edit the expected value of the **wait** statement.

### 9.3 Waiting for a Response

The TermAsync package contains two methods, **sendWait** and **wait**, that suspend the script execution until the SUT has returned with the proper response. The arguments to these methods are **-timeout** and **-expect**, where:

- **timeout** is the amount of the time the **wait** should wait before timing out and calling the timeout handler. If the **timeout** is set to 0, the SE returns control back to the script.
- **expect** is the literal string to search for when data is received from the SUT. If data is available, control is returned back to the script. If no data is available, an exception is thrown (fails), and the time-out handler is called.

When no **expect** data is supplied, the **wait** will complete when the first receive is made from the SUT. Otherwise, when a **timeout** and **expect** are supplied, the **wait** command will wait until the host has transmitted the exact string specified in the **-expect** argument, or until the supplied **timeout** time has been reached, at which point the **timeout** handler will be called.

**NOTE** — If your script has multiple **waits**, it may be best to combine them into one **wait** method with an **expect** rather than have the script pause as it processes each **wait**.

## 9.4 Adding an Extra Enter in a Script

You should create an extra **enter** command at the end of all of your TermAsync scripts to ensure that any final “receive” appears in the *SUTimages* file (Section 2.5.4).

**NOTE** — An enter is represented as a **sendWait** method (Section 9.5.1.11) that expects the system prompt to be the response.

For example, if you create the following code in the Script Builder,

```
$conn4 sendWait "clear\r"           -expect "\$ "  
$conn4 sendWait "pwd\r"           -expect "\$ "  
$conn4 compare -region {1 1 47 3} -expect {\ \  
    "\$ pwd                        " \  
    "/y2k/TEST/r5.201/solaris/y2k/builder/roll2000 " \  
    "\$                             " } \  
-ignore {2 11 6 1} \  
-ignore {2 38 8 1}
```

The *SUTimages* file will contain the following text:

```
IMAGE HEADER - String Sent (index:4233)  
pwd^M  
IMAGE FOOTER -
```

The response from the **pwd** is not recorded. However, if you press the **Return** key after the **compare**, the following code will be recorded:

```
$conn4 sendWait "clear\r"           -expect "\$ "  
$conn4 sendWait "pwd\r"           -expect "\$ "  
$conn4 compare -region {1 1 47 3} -expect {\ \  
    "\$ pwd                        " \  
    "/y2k/TEST/r5.201/solaris/y2k/builder/roll2000 " \  
    "\$                             " } \  
-ignore {2 11 6 1} \  
-ignore {2 38 8 1}  
$conn4 sendWait "\r" -expect "\$ "
```

The response from the **pwd** will be recorded in the *SUTimages* file.

## 9.5 xmyTermAsync class

**xmyTermAsync** is the Tcl class command providing language extensions that are necessary for interactions with the asynchronous device. Its methods provide the basis of operations on an asynchronous connection that you will need to create sufficiently sophisticated test cases in your scripts.

### 9.5.1 Methods

The TermAsync package contains the following methods.

#### 9.5.1.1 compare

##### Syntax

```
handle compare -region region \  
    -expect data ?-expectMaster xyz? \  
    ?-ignore region? " ?-ignore region? \  
    ?-mask maskHandle? " ?-mask maskHandle? \  
    ?-wildcard char? -warning \  
    ?-outputLabel label?
```

##### Return

1 if the data on screen matches the expected data  
0 otherwise

##### Description

The **compare** method compares a region of the screen against the expected data, entered using the **-expect *data*** option. If a comparison is successful, the count of good compares for the connection is increased by one. If a comparison fails, the number of failed compares for the connection is increased, unless **-warning** is specified, in which case the number of warnings is increased. Also the global variables **GoodCompares**, **FailedCompares**, and **WarningCompares** are updated accordingly.

**compare** takes the following attributes:

**-region *region*** Defines the region of the screen to compare against the expected data. *region* is a list of four numbers *{row column width height}*, e.g., {1 1 80 24}.

- expect *data*** Defines the expected content of the screen region. *data* is a Tcl list of lists, where each list represents a row in the region to be compared. If the actual data contains the wildcard character, the character will match any character on the screen for that particular position.
- expect** and **-expectMaster** are mutually exclusive.
- expectMaster *xyz*** Specifies the name of the Tcl variable containing the expected value, which is supplied by the Compare Master file (Section 5). The same variable will be used for writing out to the new Compare Master file.
- expectMaster** and **-expect** are mutually exclusive.
- mask *maskHandle*** Specifies a handle to an **xmyMask**. (See Section 7.2.10 for a discussion on **xmyMask**.) The **compare** statement ignores the subregions identified by the masks that are active, and the subregions identified by the masks that are passed as arguments.
- ignore *region*** Defines a subregion **compare** will ignore.
- wildcard *char*** Defines the wildcard character, the default is **\***.
- warning** Increase the number of warnings rather than the number of failed compares.
- outputLabel *label*** Specifies a label for this particular **compare** command that will be written into the output file. The label from the output file can be used to refer back to the **compare** command in the input script. This is for cross reference purposes only.

### Example

```
> set main_screen(date_time_field) {1 15 17 1}
> set main_screen(user_field) {1 39 10 1}
> set my_screen {1 1 50 5}
> $myconn compare -region $my_screen -expect {\
    {MY APPLICATION Main Menu           } \
    {Date and Time: 05/23/95 15:30:01 User: joe } \
    {                                     } \
    {1. Screen1                           } \
    {2. Screen2                           } \
    } \
    -ignore $main_screen(date_time_field) \
    -ignore $main_screen(user_field) \
    -outputLabel "Application Main Menu"
> set t1 {"MAIN MENU"}
> $myconn compare -tag "title" -expect $t1
```

## 9.5.1.2 connect

### Syntax

```
xmyTermAsync connect \  
    ?-terminal string? \  
    ?-timeout seconds? \  
    ?-shell filename? \  
    ?-bufferlen length? \  
    ?-terminfo filename? \  
    ?-name connection_name? \  
    ?-wildcard char? \  
    ?-delay milliseconds? \  
    ?-showAttributes on/off? \  
    ?-size {row column}? \  
    ?-prompt string?
```

### Return

Handle to an asynchronous connection.

### Description

The **connect** method is used to establish a connection to the asynchronous host from the MYNAH Tcl script. **connect** returns a handle to a connection back to the script. Default configuration parameters are provided.

**NOTE** — Only 24 asynchronous connections can be open at a given time from a single script execution. If a script opens more than 24 connections at one time, scripts from a standalone engine will hang and scripts running from a background engine will fail.

The following **connect** options can be used to override the default configuration parameters:

- |                                |  |
|--------------------------------|--|
| <b>-terminal <i>string</i></b> | Sets the terminal type being emulated.<br>Valid types are <i>vt100</i> and <i>xterm</i> .<br><b>NOTE</b> — While other terminal types may be used, only these two types have been tested and verified with the MYNAH System. |
| <b>-timeout <i>seconds</i></b> | Sets the time that the MYNAH System waits for a response from the SUT (time-out).  |

<b>-shell <i>filename</i></b>	Defines the shell invoked when the MYNAH System connects to the SUT. <b>NOTE</b> — The default shell that is invoked when you create an asynchronous connection is the k-shell. If you don't need the k-shell, you may want to specify the bourne shell, i.e. enter <b>-shell /bin/sh</b> , since it is simpler and requires less overhead.
<b>-bufferlen <i>length</i></b>	Defines the size of the buffer that stores the last response from the SUT. (It must be a non-negative number.)
<b>-terminfo <i>filename</i></b>	Defines the location of the auxiliary terminfo file.
<b>-name <i>connection_name</i></b>	Defines the name of the connection, overwriting the default <b>.xmyTermAsync_N</b> .
<b>-wildcard <i>char</i></b>	The character used for masking regions.
<b>-delay <i>milliseconds</i></b>	The delay in milliseconds used by the <b>send</b> method.
<b>-showAttributes <i>on/off</i></b>	Determines what character attributes are to be included in the <i>SUTimage</i> file. The <b>on</b> option causes the character attributes on the screen to be included in the <i>SUTimage</i> file. The <b>off</b> option causes the character attributes on the screen to NOT be included in the <i>SUTimage</i> file.
<b>-size {<i>row column</i>}</b>	Sets the row and column size of the screen. The size is specified as a list in the format, <b>{<i>row column</i>}</b> , where $24 \leq \textit{row} \leq 50$ and $80 \leq \textit{column} \leq 132$ .
<b>-prompt</b>	Specifies a default string that the <b>wait</b> and <b>sendWait</b> methods are using if no other argument is supplied.

### Example

```
> set myconn [xmyTermAsync connect -terminal vt100 \  
             -timeout 10 -size {30 90}]
```

### Exceptions

- **connect** will fail (throw an exception) if the connection cannot be established (because of an Operating System error).
- **connect** will fail if a duplicate name is specified.

### 9.5.1.3 disableMask

#### Syntax

```
handle disableMask list_of_masks
```

#### Return

None

#### Description

The **disableMask** method disables a mask, created by the **xmyMask** command, for the connection.

#### Example

```
> $myconn disableMask $mask1 $mask2
```

#### Exception

Mask handle not enabled on connection.

#### 9.5.1.4 disconnect

##### **Syntax**

```
handle disconnect
```

##### **Return**

None

##### **Description**

The **disconnect** method destroys the connection handle.

##### **Example**

```
> $myconn disconnect
```



### 9.5.1.5 enableMask

#### Syntax

```
handle enableMask list_of_masks
```

#### Return

None

#### Description

The **enableMask** method enables a mask, created by the **xmyMask** command, for the connection. Any subsequent **compare** statements on the connection will ignore the pattern defined in the mask object.

#### Example

```
> $myconn enableMask $mask1 $mask2
```

#### Exception

Invalid mask handle

### 9.5.1.6 getAttributes

#### Syntax

```
handle getAttributes ?-position {row column}?
```

#### Return

A list of attributes

#### Description

The **getAttributes** method returns the attribute (i.e. blinking, highlighted etc.) value at the given row and column. If the **-position** option is not specified then the current position is taken as the default.

#### Example

```
> $myconn getAttributes  
BOLD, BLINK
```

### 9.5.1.7 listAttributeTypes

#### Syntax

```
xmyTermAsync listAttributeTypes  
handle listAttributeTypes
```

#### Return

NONE, STANDOUT, UNDERLINE, REVERSE, BLINK, DIM, BOLD,  
INVISIBLE, PROTECT, GRAPHIC, ALTERNATE

#### Description

The **listAttributeTypes** method returns the list of valid attributes.

#### Example

```
> $myconn listAttributeTypes  
STANDOUT UNDERLINE REVERSE BLINK DIM BOLD INVISIBLE PROTECT
```

### 9.5.1.8 response

#### Syntax

```
handle response ?-tail number? ?-file filename? ?-append?  
handle response ?-head number? ?-file filename? ?-append?  
handle response -unique  
handle response -numberOfCharacters  
handle response -numberOfLines  
handle response ?-after string? -after# integer? \  
    ?-before string? ?-before# integer? \  
    ?-file filename? ?-append?
```

#### Return

A string or an integer

#### Description

The **response** method returns the latest response of the application. If no arguments are specified, the complete response from the application is returned. The characters sent by the SUT between two **send** statements define the latest system response.

The response may contain the last string that was sent if the SUT does echoing (e.g., as does the UNIX shell).

**response** takes the following attributes:

- |                              |  |
|------------------------------|--|
| <b>-tail <i>number</i></b>   | Returns the <i>number</i> of lines or characters from the end of the last system response.<br><br><i>number</i> is an integer followed by the suffix <b>ch</b> or <b>ln</b> (for characters or lines, respectively).       |
| <b>-head <i>number</i></b>   | Returns the <i>number</i> of lines or characters from the beginning of the last system response.<br><br><i>number</i> is an integer followed by the suffix <b>ch</b> or <b>ln</b> (for characters or lines, respectively). |
| <b>-file <i>filename</i></b> | Returns an empty string and the response is saved to the specified filename.   |
| <b>-append</b>               | Used with <b>-file</b> , <b>-append</b> appends the response to the specified <i>filename</i> . If this attribute is not used and <i>filename</i> is an existing file, <b>response</b> will overwrite the file.            |

<b>-unique</b>	Returns the shortest string from the end of the response that does not have any other occurrences in the response.
<b>-numberOfCharacters</b>	Returns the number of characters sent by the application in its last response.
<b>-numberOfLines</b>	Returns the number of lines of last application response.
<b>-after <i>string</i></b>	Returns the SUT response after the first (or user specified) occurrence of the <i>string</i> pattern.
<b>-after# <i>integer</i></b>	Specifies which occurrence after the <i>string</i> pattern to return.
<b>-before <i>string</i></b>	Returns the SUT response after the before (or user specified) occurrence of the <i>string</i> pattern.
<b>-before# <i>integer</i></b>	Specifies which occurrence before the <i>string</i> pattern to return.

**NOTE** — The latest response of the application is returned with all embedded null characters (i.e., ASCII 0) stripped out. The **-numberOfCharacters** option will return the actual number of characters including null characters. Null characters are not stripped if the response is written to a file (using **-file**).

## Exceptions

An exception is raised if the receive fails, such as if the connection died.

## Example

```
> $myconn send "ls -la\n"  
> $myconn wait "myprompt $"  
> set lines [$myconn response -numberOfLines]  
> $myconn response -tail 10ch
```

### 9.5.1.9 screen

#### Syntax

```
handle screen ?-region region?
    ?-mask maskHandle? ... ?-mask maskHandle?
    ?-ignore region? ... ?-ignore region?\  
    ?-wildcard char? ?-file filename? ?-append?  
  
handle screen -score ?-method name?
```

#### Return

The first format of the **screen** method returns a list of lists representing a screen image. If **-file *filename*** is specified, the list is saved to a file.

The second format returns an integer.

#### Description

The **screen** method returns a string that represents a screen image, specified in a list format, of the **region** (*{row column width height}*). Each element of the list is a list of characters (or strings) that represents a row in the screen.

**screen** takes the following attributes:

- |                                |   |
|--------------------------------|---|
| <b>-region <i>region</i></b>   | Defines the region parameters of the screen image to return. <b><i>region</i></b> is a list in the format <i>{row column width height}</i> , e.g., a valid entry would be <b>-region {1 40 40 24}</b> .                       |
| <b>-mask <i>maskHandle</i></b> | Specifies a handle to an <b>xmyMask</b> . (See Section 7.2.10 for a discussion on <b>xmyMask</b> .) The <b>screen</b> statement ignores the sub-regions identified by the masks that are passed as arguments.                 |
| <b>-ignore <i>region</i></b>   | Defines a sub-region <b>screen</b> will ignore.   |
| <b>-wildcard <i>char</i></b>   | Defines the wildcard character that will replace the characters in the <b>-ignore <i>region</i></b> subregion. The default is <b>*</b> .  |
| <b>-file <i>filename</i></b>   | Returns an empty string and saves the response to the specified filename.   |
| <b>-append</b>                 | Used with <b>-file</b> , <b>-append</b> appends the response to the specified <b><i>filename</i></b> . If this attribute is not used and <b><i>filename</i></b> is an existing file, <b>response</b> will overwrite the file. |
| <b>-score</b>                  | Returns an integer representing the screen score.   |

**-method *name*** Defines the method used to compute the screen score. In the *normal* method, the score is computed by assigning to each character on the screen a score from 1 to 128 and adding them up. In the method is *highlight*, the single character score is incremented by 128 if the character is highlighted. The default is *normal*.

### Example

This example captures the current screen and saves to the file *myfile*.

```
> set file [open "myfile" w]
> set myscreen {$myconn screen -region {1 1 80 25}\
  -mask {10 10 5 5} -wildcard #}
> puts $file $myscreen
```

This example can be more concisely re-written as the following:

```
> $myconn screen -region {1 1 80 25} -mask {10 10 5 5}\
  -wildcard # -file "myfile"
```

### 9.5.1.10 send

#### Syntax

```
handle send string-expression ?-delay milliseconds? ?-secret?  
handle send -key key ?-repeat number? ?-delay milliseconds?\  
?-secret?
```

#### Return

None

#### Description

The **send** method evaluates *string-expression*, sends it to the SUT, and updates the internal data representation of the screen. *string-expression* can be any Tcl expression that returns a string.

**send** also takes the following attributes:

**-delay *milliseconds*** Represents the padding. If the padding is greater than zero the system sends a character at a time, and it waits for the specified number of milliseconds before sending the next character.

**-key *key*** Specifies the escape sequence defined for the key that is sent to the SUT.

The following special keys are defined by default. (The escape sequence is defined in the *terminfo* or *auxiliary terminfo* files.) This argument is case insensitive.

```
backspace, return, delete, line_feed,  
enter, esc, tab,  
  
left_arrow, down_arrow, up_arrow,  
right_arrow, right_1 .. right_10,  
  
left_1 .. left_10, top_1 .. top_9,  
numeric_0 .. numeric_9,  
  
pf1.. pf4.
```

**-repeat *number*** Specifies the number of times the key is sent.

**-secret** Specifies that the string that is sent won't be recorded in the *SUTimage* file in the **String Sent** section. Instead, the string *<hidden data>* is placed in the file.

**Note** — If the application echoes the string that is sent on the screen, the *SUTimage* file will contain the string in the **Screen** and **Response** section of the file.



### Example

```
> $myconn send "/usr/local/bin/dq\n"  
> $myconn send -key tab -repeat 3  
> $myconn send "25967"  
> $myconn send -key return
```

### Exceptions

An exception is raised if the **send** fails, for example because the connection died.

### 9.5.1.11 sendWait

#### Syntax

```
handle sendWait string-expression \  
    ?-expect string-expression? ?-timeout timeout? ?-secret?
```

#### Return

The **sendWait** method sends a string to the SUT and waits until a second string is returned from the SUT. It is a shorthand for a **send** immediately followed by a **wait**.

**sendWait** takes the following attributes:

<i>string-expression</i>	Specifies the string to send to the SUT.
<b>-expect</b> <i>string-expression</i>	Specifies the string you expect to be returned by the SUT. If you don't specify an expected string, <b>sendWait</b> will expect the default prompt. This default prompt can be <ul style="list-style-type: none"><li>• Set on a per connection basis an option to the <b>connect</b> command (<a href="#">Section 9.5.1.2.</a>)</li><li>• Changed for the current connection using the <b>-prompt</b> attribute (<a href="#">Section 9.5.2.10.</a>)</li><li>• Applied to the <b>xmyTermAsync</b> class command to set a default script-wide prompt.</li></ul>
<b>-timeout</b> <i>timeout</i>	Specifies number of seconds to wait before <b>sendWait</b> returns control back to the script
<b>-secret</b>	Specifies that the string that is sent won't be recorded in the <i>SUTimage</i> file in the <b>String Sent</b> section. Instead, the string <i>&lt;hidden data&gt;</i> is placed in the file.  <b>Note</b> — If the application echoes the string that is sent on the screen, the <i>SUTimage</i> file will contain the string in the <b>Screen</b> and <b>Response</b> section of the file.

#### Example

```
> $myconn sendWait "ls -la\n" -expect "myprompt $"
```

---

### 9.5.1.12 wait

#### Syntax

```
handle wait tcl-expression ?-timeout seconds?  
handle wait -expect expression ?-timeout seconds?
```

#### Return

No result

#### Description

The **wait** method stops the script execution until a particular condition is verified or a **timeout** has occurred. In its first form, **wait** stops execution until an entered Tcl expression is satisfied. In its second form, execution waits until the expected **expression** is encountered.

**wait** also takes the following attributes:

- |                           |   |
|---------------------------|---|
| <b>-timeout seconds</b>   | Stop execution for the specified number of seconds. If a <b>timeout</b> value is not set explicitly, the default connection <b>timeout</b> value is assumed.  |
| <b>-expect expression</b> | The script waits until the string specified in <b>expression</b> appears at the end of the SUT response. If you don't specify an expected string, <b>wait</b> will expect the default prompt. This default prompt can be <ul style="list-style-type: none"><li>• Set on a per connection basis an option to the <b>connect</b> command (<a href="#">Section 9.5.1.2.</a>)</li><li>• Changed for the current connection using the <b>-prompt</b> attribute (<a href="#">Section 9.5.2.10.</a>)</li><li>• Applied to the <b>xmyTermAsync</b> class command to set default a script-wide prompt.</li></ul> |

**Note** — If the response contains null characters (i.e., ASCII 0), the nulls are stripped from the response before comparing with the expected string. Therefore, you should not have to worry about embedded null characters in the expected string.

## Example

The following lines first determines what the prompt is on the system to which you created a connection. It then sends an **ls** command to the system and waits until the system returns the prompt.

```
> set myconn [xmyTermAsync connect]
> xmySleep 2; #sleep for a few seconds
> set prompt [$myconn response -tail 1ln]
> $myconn send "ls -la\n"
> $myconn wait -expect $prompt
```

If you know what the prompt will be, you can enter it directly as the argument to **-expect**, as in the following:

```
> $myconn wait -expect "prompt % "
```

This time you want execution to wait until the cursor is in row 10 and column 10.

```
> $myconn wait { [$h -position] == "10 10" }
```

## Exceptions

Timeout reached, SUT has not returned, timeout handler called

## 9.5.2 Attributes

The following is the list of attribute methods that can be used for a particular connection to get (or set) configuration parameters or status information.

### 9.5.2.1 -bufferlen

#### Syntax

```
handle -bufferlen
```

#### Description

The **bufferlen** attribute returns the size of the buffer that caches SUT responses.

### 9.5.2.2 -column

#### Syntax

```
handle -column
```

#### Description

The **column** attribute returns the current column position.

### 9.5.2.3 -connections

#### Syntax

```
xmyTermAsync -connections
```

#### Return

List of asynchronous connections

#### Description

The **connections** attribute lists all the open asynchronous connections.

#### Example

```
> xmyTermAsync -connections  
{.xmyTermAsync_1 xmyTermAsync_2}
```

### 9.5.2.4 -delay

#### Syntax

```
handle -delay ?milliseconds?
```

#### Description

The **delay** attribute returns or sets the number of *milliseconds* used as padding in the **send** method.

### 9.5.2.5 -failedCompares

#### Syntax

```
handle -failedCompares ?number?
```

#### Description

The **failedCompares** attribute returns or sets the number of failed compares.

### 9.5.2.6 -goodCompares

#### Syntax

```
handle -goodCompares ?number?
```

#### Description

The **goodCompares** attribute returns or sets the number of successful compares performed using the **compare** method for this handle.

### 9.5.2.7 -masks

#### Syntax

```
handle -masks
```

#### Return

List of enabled masks

#### Description

The **-masks** attribute lists all of the mask handles associated to a particular connection.

#### Example

```
> $myconn -masks  
.xmyMask01 .xmyMask03
```

### 9.5.2.8 -name

#### Syntax

```
handle -name
```

#### Description

The **name** attribute returns the name of the connection.

#### 9.5.2.9 -position

##### Syntax

```
handle -position
```

##### Description

The **position** attribute returns the position of the cursor in a list format: *{row column}*.

#### 9.5.2.10 -prompt

##### Syntax

```
handle -prompt ?string?
```

##### Description

The **prompt** attribute returns or sets the default waiting string for the **sendWait** and **wait** methods.

#### 9.5.2.11 -row

##### Syntax

```
handle -row
```

##### Description

The **row** attribute returns the current row position.

#### 9.5.2.12 -shell

##### Syntax

```
handle -shell
```

##### Description

The **shell** attribute returns the shell used to start up the connection, e.g., */bin/sh*.



### 9.5.2.13 -showAttributes

#### Syntax

```
handle -showAttributes ?mode?
```

#### Description

The **showAttributes** attribute returns (**true** or **false**) or sets the mode (**on** or **off**) of the **connect** method's **-showAttributes** attribute. That is, this determines what character attributes are to be included in the *images* file.

### 9.5.2.14 -size

#### Syntax

```
handle -size
```

#### Description

The **size** attribute returns the size of the screen in a list format: *{row column}*.

### 9.5.2.15 -status

#### Syntax

```
handle -status
```

#### Description

The **status** attribute returns the connection's status, whether it is alive(up) or not (down).

0 - The connection is down

1 - The connection is up.

#### 9.5.2.16 -terminal

##### Syntax

```
handle -terminal
```

##### Description

The **terminal** attribute returns the terminal being emulated, e.g., vt100.

#### 9.5.2.17 -terminfo

##### Syntax

```
handle -terminfo
```

##### Description

The **terminfo** attribute returns the file name of the auxiliary *terminfo* file.

#### 9.5.2.18 -timeout

##### Syntax

```
handle -timeout ?seconds?
```

##### Description

The **timeout** attribute returns or sets the default number of seconds to wait for a SUT response.

#### 9.5.2.19 -warningCompares

##### Syntax

```
handle -warningCompares ?number?
```

##### Description

The **warningCompares** attribute returns or sets the number of user defined warnings.

#### 9.5.2.20 -wildcard

##### **Syntax**

```
handle -wildcard ?char?
```

##### **Description**

The **wildcard** attribute returns or sets the default wildcard character used in **compare** and **screen** methods.

### 9.5.3 Changing Configuration Parameters

#### Syntax

```
xmyTermAsync \  
  ?-terminal string? \  
  ?-timeout seconds? \  
  ?-shell filename? \  
  ?-bufferlen length? \  
  ?-terminfo filename? \  
  ?-wildcard char?\  
  ?-delay milliseconds?  
  ?-showAttributes mode?  
  ?-prompt string?
```

#### Return

None

#### Description

All of the arguments for the **connect** method ([Section 9.5.1.2](#)), with the exception of the **-name** argument, can also be applied to the **xmyTermAsync** class command to set default attributes script-wide. After the command is issued, all the new connections will inherit the new default for the attribute.

#### Example

To change the default timeout to 10 seconds, type

```
> xmyTermAsync -timeout 10
```

### 9.5.4 Querying Configuration Parameters

#### Syntax

```
xmyTermAsync -terminal  
xmyTermAsync -timeout  
xmyTermAsync -shell  
xmyTermAsync -bufferlen  
xmyTermAsync -terminfo  
xmyTermAsync -wildcard  
xmyTermAsync -delay  
xmyTermAsync -showAttributes  
xmyTermAsync -prompt
```

## Return

A Tcl string (or integer) that represent the current value of the parameter,

## Description

All of the arguments for the **connect** method ([Section 9.5.1.2](#)), with the exception of the **-name** argument, can also be used with the **xmyTermAsync** class command to query the current default configuration parameters.

## Example

```
> xmyTermAsync -terminal  
vt100  
  
> xmyTermAsync -timeout  
10
```

## 9.6 Async Procedures

This section describes Tcl procedures delivered with the MYNAH System that are designed specifically to aid Async scripting.

**NOTE** — Currently, there is only one Async specific procedure.

### 9.6.1 xmyPrintScreen

#### Syntax

```
xmyPrintScreen handle Destination
```

#### Return

Prints an entire Async screen

#### Description

The **xmyPrintScreen** procedure prints the entire Async screen based on the entered Async connection handle. The ***Destination*** can be `stdout`, `stderr`, or a filename.

#### Example

The following example opens a file and prints the entire Async screen to the file *temp.txt*, designated by the variable *\$fp*.

```
> set fp [open temp.txt w]
> xmyPrintScreen $conn_async $fp
```

## 9.7 Async Scripting

The previous section detailed the extensions in the TermAsync Package, but how do these extensions fit together to form scripts. Let's look a few examples.

In this first example (Figure 9-1) we want to

1. Logon to a remote system
2. Use the **ls** command to display the contents of the current directory.
3. Use the **pwd** command to display the current directory
4. Retrieve this information
5. Disconnect from the remote system.

```
xmyLoadPkg TermAsync
keylset c -prompt password -echo false
set a [xmyPrompt [list $c]]
set conn1 [xmyTermAsync connect]
$conn1 wait -expect ":"
$conn1 sendWait "rlogin 128.96.186.123\r" -expect "d:"
$conn1 send "$a\r"
$conn1 sendWait "ls\r" -expect "# "
$conn1 sendWait "pwd\r" -expect "# "
$conn1 response -file OUTPUT/out10
$conn1 screen -file OUTPUT/out11
$conn1 disconnect
```

**Figure 9-1.** Sample TermAsync Script 1

Let's assume there is an anonymous **ftp** archive that each week places new files in a directory called *new\_this\_week*. You can create a script (Figure 9-2) that each week

accesses this archive and places them in a directory called `/u/kjd/NEW`, assuming your home path is `/u/kjd`.

```
xmyLoadPkg TermAsync
set conn2 [xmyTermAsync connect]
$conn2 wait -expect ": "
$conn2 sendWait "cd /users/kjb/NEW\r" -expect ": "
$conn2 sendWait "ftp ftp.bercco.com\r" -expect ": "
$conn2 sendWait "anonymous\r" -expect "d:"
$conn2 sendWait "kjb@\r" -expect "> "
$conn2 sendWait "cd pub/new_this_week\r" -expect "> "
$conn2 sendWait "prompt\r" -expect "> "
$conn2 sendWait "mget *\r" -expect "> "
$conn2 sendWait "bye\r" -expect ": "
$conn2 disconnect
xmyExit
```

**Figure 9-2.** Sample TermAsync Script 2



The script in Figure 9-3 logs in to the NY Public Library and retrieves the title and author of the non-fiction best seller. The result is printed (using **xmyPrint**) in the output file.

```
# only user and error output
set xmyVar(OutputLevel) {user error}
xmyLoadPkg TermAsync

set nylib [xmyTermAsync connect -timeout 30 -shell /bin/sh]
$nylib sendWait "PS1=\\$ \\r" -expect "\\$ "
$nylib wait -expect "\\$ "

# connect with ny public library
$nylib sendWait "telnet nyplgate.nypl.org\r" -expect ": "
$nylib sendWait "nypl\r" -expect ": "
# choose DB
$nylib sendWait "1\r" -expect "s the key labeled \"Return.\""
$nylib sendWait "\r" -expect "m"

# choose best seller list
$nylib sendWait "5\r" -expect "m"

# choose non fiction
$nylib sendWait "2\r" -expect ": \033\[0m\033\[1m"

# make sure we go the right screen
set rightScreen [$nylib compare -region {3 2 34 1} -expect {
    "List: NYT Nonfiction Best Sellers " }]

# if the screen is the one we want print title & author of
# best seller into log file

if { $rightScreen } {
    set NF_BestSellerAuthor [$nylib screen -region {5 9 60 1}]
    set NF_BestSellerTitle [$nylib screen -region {6 9 60 1}]
    xmyPrint -text "Best Selling Book (non fiction): \
        $NF_BestSellerTitle \n \
        by $NF_BestSellerAuthor "
}

# now logoff && disconnect

$nylib sendWait "q\r" -expect "m"
$nylib sendWait "so\r" -expect "m"
$nylib sendWait "7\r" -expect ": "
$nylib sendWait "3\r" -expect "\\$ "
$nylib disconnect
```

**Figure 9-3.** Sample TermAsync Script 2



## 10. Term3270 Extension Package

### 10.1 Overview

The Term3270 Extension Package provides the functions necessary for interactions with the 3270 device.

The user interface to the 3270 SE is through a graphical terminal emulation for interactive sessions and through the main GUI or Command Line User Interface (CLUI) when running automated test cases to the background execution environment. These extensions will let you directly manipulate scripts to tailor the test case against the SUT.

**NOTE** — To access the Term3270 Extension Package you must first run **xmyLoadPkg Term3270**.

#### 10.1.1 Methods Overview

[Section 10.4.1](#) contains detailed descriptions of the Term3270 Method extensions. The extensions are listed in alphabetical order (within each category). [Table 10-1](#) lists the methods, organizing them in the general functional categories. [Table 10-1](#) also gives a brief description of each extension and the section where the detailed description can be found.

**Table 10-1.** Term3270 Method Extensions (Sheet 1 of 2)

Category	Method	Description	Section
<b>Connection</b>	<b>connect</b>	Establishes a connection to the 3270 host from the MYNAH Tcl script.	<a href="#">10.4.1.2,</a> <a href="#">Page 10–16</a>
	<b>disconnect</b>	Destroys a connection made to the host through the <b>connect</b> method.	<a href="#">10.4.1.4,</a> <a href="#">Page 10–20</a>
<b>Data Entry/Retrieval</b>	<b>fieldLength</b>	Returns the length of the specified field.	<a href="#">10.4.1.7,</a> <a href="#">Page 10–23</a>
	<b>screen</b>	Returns the portion of the screen specified through location and dimensions.	<a href="#">10.4.1.16,</a> <a href="#">Page 10–32</a>
	<b>send</b>	Simulates the pressing of a 3270 function key.	<a href="#">10.4.1.17,</a> <a href="#">Page 10–34</a>
	<b>type</b>	Sends the keystrokes specified by a “text” parameter.	<a href="#">10.4.1.19,</a> <a href="#">Page 10–36</a>

**Table 10-1.** Term3270 Method Extensions (Sheet 2 of 2)

Category	Method	Description	Section
<b>Location</b>	<b>fieldBegin</b>	Moves the cursor to the first position of the field located by the given location parameters.	10.4.1.6, Page 10–22
	<b>fieldNext</b>	Moves the cursor to the first position of the next field.	10.4.1.8, Page 10–24
	<b>find</b>	Finds the specified string on the current screen, returning the row and column position of its location.	10.4.1.9, Page 10–25
	<b>findLabel</b>	Finds the specified label on the current screen, returning the row and column position of its location.	10.4.1.10, Page 10–26
	<b>format</b>	Loads tag name files used for finding a screen location through tagnames.	10.4.1.11, Page 10–27
	<b>moveCursor</b>	Moves the cursor to the position specified by the given parameters	10.4.1.15, Page 10–31
<b>Comparisons</b>	<b>compare</b>	Compares a region in the current 3270 display screen of a connection with a compare pattern body.	10.4.1.1, Page 10–14
	<b>disableMask</b>	Disables a mask object.	10.4.1.3, Page 10–19
	<b>enableMask</b>	Enables an already created mask object for a particular connection instance.	10.4.1.5, Page 10–21
	<b>ignore</b>	Defines a region to ignore during subsequent <b>compare</b> statements.	10.4.1.13, Page 10–29
<b>Waiting</b>	<b>sendWait</b>	Sends the special function key to the 3270 SUT and waits for the SUT's reply.	10.4.1.18, Page 10–35
	<b>wait</b>	Notifies that incoming data is being sent from the host and that the script should wait until the host has fully completed its transmission.	10.4.1.20, Page 10–37
<b>Attributes</b>	<b>getAttribute</b>	Finds the attribute byte value of a location in the connection object's display.	10.4.1.12, Page 10–28
	<b>listAttributeTypes</b>	Lists all of the attribute descriptors.	10.4.1.14, Page 10–30

## 10.1.2 Attributes Overview

Section 10.4.2 contains detailed descriptions of the Term3270 Attribute extensions. The extensions are listed in alphabetical order. Table 10-2 lists the extensions, organizing them in general functional categories. Table 10-2 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 10-2.** Term3270 Attribute Extensions (Sheet 1 of 3)

Category	Attribute	Description	Section
<b>Connection</b>	<b>-connections</b>	Returns a list of currently open 3270 connections.	10.4.2.4, Page 10–40
	<b>-host</b>	Returns the name of the host.	10.4.2.9, Page 10–42
	<b>-model</b>	Outputs the name of the model the <b>xmyTerm3270</b> instance is configured.	10.4.2.17, Page 10–44
	<b>-name</b>	Specifies a name for connection handles.	10.4.2.18, Page 10–45
	<b>-port</b>	Outputs the name of the port number.	10.4.2.19, Page 10–45
	<b>-queryConnection</b>	Returns the connection's state.	10.4.2.20, Page 10–46
	<b>-status</b>	Returns the connection's status.	10.4.2.24, Page 10–47
	<b>-timeout</b>	Specifies amount of time that the connection will wait to receive a solicited screen.	10.4.2.26, Page 10–48
	<b>-TN3270E</b>	Supports TN3270E protocol for connecting to a host that begins transmission in TN3270E	10.4.2.27, Page 10–48

**Table 10-2.** Term3270 Attribute Extensions (Sheet 2 of 3)

Category	Attribute	Description	Section
<b>Data Entry/Retrieval</b>	<b>-collectKeyCount</b>	Indicates whether or not a function key count should be kept.	10.4.2.2, Page 10–39
	<b>-dataBytesReceived</b>	Number of bytes received.	10.4.2.5, Page 10–40
	<b>-formatName</b>	Contains the format/screen name of a connection’s current screen.	10.4.2.7, Page 10–41
	<b>-keyCount</b>	Displays the number of program keys pressed.	10.4.2.12, Page 10–43
	<b>-lastKeyPressed</b>	Returns the name of the last function key pressed.	10.4.2.13, Page 10–43
	<b>-tagDir</b>	Indicates the path(s) to look for tag name files.	10.4.2.25, Page 10–47
<b>Location</b>	<b>-column</b>	Returns the cursor’s current column position.	10.4.2.1, Page 10–39
	<b>-row</b>	Returns the cursor’s current row position.	10.4.2.21, Page 10–46
<b>Comparisons</b>	<b>-compareInvisibleFields</b>	Indicates whether invisible fields should be processed.	10.4.2.3, Page 10–40
	<b>-failedCompares</b>	Returns the number of failed compares.	10.4.2.6, Page 10–41
	<b>-goodCompares</b>	Returns the number of good compares performed.	10.4.2.8, Page 10–41
	<b>-masks</b>	Returns a list of enabled masks for a connection.	10.4.2.16, Page 10–44
	<b>-screenIdFile</b>	Indicates the file from which the screen identification information is to be taken.	10.4.2.22, Page 10–46
	<b>-warningCompares</b>	Number of warnings generated during compares.	10.4.2.28, Page 10–48

Table 10-2. Term3270 Attribute Extensions (Sheet 3 of 3)

Category	Attribute	Description	Section
Waiting	-initialWait	Indicates whether an initial read should be performed during logon.	10.4.2.10, Page 10-42
	-initialWaitExpect	Supplies the string expression that <b>initialWait</b> should wait for.	10.4.2.11, Page 10-42
	-lastResponseTime	Returns the time between last <b>send</b> and new <b>screen</b> ready on the connection.	10.4.2.14, Page 10-43
	-lastTransmitTime	Returns the last time a <b>send</b> was done.	10.4.2.15, Page 10-44
Attributes	-showAttributes	Write application's screen attribute bytes to the <i>SUImage</i> file.	10.4.2.23, Page 10-47

## 10.2 Term3270 Attribute Definitions

Table 10-3 lists the conventions and definitions for the attributes that are generally used by the Term3270 methods. When a method uses attributes not listed in Table 10-3, those attributes will be detailed in the method description.

**Table 10-3.** Term3270 Attribute Definitions (Sheet 1 of 3)

Attribute	Definition
<b>-append</b>	Used with <b>-file</b> , <b>-append</b> appends the response to the specified <i>filename</i> . If this attribute is not used and <i>filename</i> is an existing file, <b>response</b> will overwrite the file.
<b>-character <i>position</i></b>	<i>position</i> can be a value in the range of 1 to whatever the last position is on the 3270 presentation space, the last position being determined by the type of model. For instance, for model 2, the character position could have a value of 1 to 1920 (24 rows x 80 columns).
<b>-dimension <i>dimension</i></b>	<i>dimension</i> denotes the ability to specify the dimensions of a block. <i>dimension</i> consists of a list of two items, first the width, then the height, for example <b>-dimension {5 8}</b> .
<b>-direction <i>iteration</i></b>	<p>This is used during label processing. The way this parameter works is that, from the label location, the argument finds the number of fields away from the label, specified by <i>iteration</i>, in the direction from the field, specified by <b>-direction</b>, and uses that field for whatever function it is to perform.</p> <p><b>-direction</b> can be <i>right</i>, <i>left</i>, <i>up</i>, and <i>down</i>. <i>iteration</i> is an integer, e.g., a valid entry would be <b>-right 12</b>.</p> <p>The default is <b>-right 1</b>.</p> <p>When a label appears above a field and the first character of the label does not align with the first character space in the field, characters typed in the field appear aligned with the first character of the label. For example, if the screen contains the following label and field under the label</p> <pre style="margin-left: 40px;"> NAME - - - - - executing \$conn1 type -text "Tom" -label "NAME" -down 1 </pre> <p>results in the following. (Note that the value <i>Tom</i> begins under the <i>N</i>, which is the first character in the label.)</p> <pre style="margin-left: 40px;"> NAME - - - Tom - - - </pre>



**Table 10-3.** Term3270 Attribute Definitions (Sheet 2 of 3)

Attribute	Definition
<b>-expect <i>pattern</i></b>	<i>pattern</i> is the string you expect to find or receive from a SUT. <b>-expect</b> and <b>-expectMaster</b> are mutually exclusive.
<b>-expectMaster <i>xyz</i></b>	Specifies the name of the Tcl variable containing the expected value, which is supplied by the Compare Master file (Section 5). The same variable will be used for writing out to the new Compare Master file. <b>-expectMaster</b> and <b>-expect</b> are mutually exclusive.
<b>-file <i>filename</i></b>	Used with the <b>screen</b> method (Section 10.4.1.16), <b>-file</b> returns an empty string and the response is saved to the specified <i>filename</i> .
<b>-ignore <i>region</i></b>	<b>-ignore <i>region</i></b> is used to denote a region of the screen that is to be ignored during a comparison.
<b>-label <i>label</i></b>	<i>label</i> is a string used to search against the current 3270 screen for the purposes of finding the field associated to the label. When the label is found, usually a <b>fieldNext</b> is implicitly called with the proper label arguments, such as <b>-direction</b> , <b>-iteration</b> or <b>-occurrence</b> , to find the location of the desired field.
<b>-mask <i>maskhandle</i></b>	<b>-mask <i>maskhandle</i></b> is used to denote a pattern that should be ignored during a comparison. The <i>maskhandle</i> is created using <b>xmyMask</b> (Section 7.2.10).
<b>-occurrence <i>occurrence</i></b>	<i>occurrence</i> is used during label processing. <i>occurrence</i> is an integer value that specifies the <i>i</i> 'th occurrence of the label field on the screen that should be used to locate the desired field.
<b>-offset <i>offset</i></b>	<i>offset</i> specifies the number of positions from the actual location specified, through tagname or label processing, that the intended action should be performed. For label processing, the <i>offset</i> determines the final position from where the command should start looking for the user specified field position. Offsets will not wrap to the next line; instead an exception of illegal argument will be incurred.
<b>-position <i>position</i></b>	<i>position</i> lets you specify the location within a screen display by row and column values. <i>position</i> is a list consisting of two elements, first the row, then the column value, for example <b>-position {10 55}</b> .
<b>-protectedField</b>	<b>-protectedField</b> is an optional attribute for the <b>fieldNext</b> method that tells <b>fieldNext</b> to find the next protected field.

**Table 10-3.** Term3270 Attribute Definitions (Sheet 3 of 3)

<b>Attribute</b>	<b>Definition</b>
<b>-region</b> <i>region</i>	<i>region</i> defines a block or region on the screen, and the location of that block within the screen. <i>region</i> is a list of four items: row, column, width, and height values.
<b>-searchFrom</b>	<b>-searchFrom</b> is an optional flag to label processing statements. If it is used, search begins at the current cursor position and proceeds to search for the label in the 3270 screen until it finds it or reaches the last position on the screen.
<b>-string</b> <i>string</i>	<i>string</i> is a string used to search against the current 3270 screen.
<b>-tag</b> <i>tagname</i>	<i>tagname</i> denotes the ability to specify the location of a screen display as defined in user tag name files.
<b>-unprotected</b>	<b>-unprotected</b> is an optional flag to label processing statements. If it is used, the search finds the next instance of the label within the 3270 screen, regardless of whether the label's field is protected or unprotected.
ERROR: Error Message	This denotes the error message returned from a command for a particular error.

### 10.3 Term3270 Location Processing

The Term3270 Package supports three methods for referring to physical screen locations on a synchronous terminal.

- Row and column coordinates that refer to actual screen locations. This method is useful when the other two are not available or not desirable.
- Label names for screen locations where the label names are determined by a string 'label' that appears on the screen at run time.
- Tag names for screen locations where the tag names are defined by the user in a Tag Name File.

The following subsections describe each of these methods, explaining how to use the method as well as the strengths and weaknesses of each method.

To help illustrate how you use each method, we will use the Term3270 **fieldNext** extension. **fieldNext** moves the cursor to the first position of the next unprotected field. For a complete description of **fieldNext** and its syntax, please see [Section 10.4.1.8](#).

**NOTE** — The examples in the following sub-sections assume you created an Term3270 connection using the variable **conn1**.

Figure 10-1 contains an example of a 3270 screen. We will be using this screen to illustrate each location method. We've added row and column markers to aid our discussions.

```
      1      2      3      4      5      6      7      8
123456789012345678901234567890123456789012345678901234567890
-----
1:                                     06/04/96 08:58
2: EXMP01                               EXMP ENTITY SELECTION SCREEN      N
3:
4:
5:
6:
7:
8:
9:                ENTITY      :  _
10:
11:               RECONNECT:  _
12:
13:
14:
15:
16:
17:
18:
19:
20:
21:
22:
23: Copyright (C) 1989, 96 BELLCORE, ALL RIGHTS RESERVED.
24:                                                                 (VC)
```

Figure 10-1. Example 3270 Screen

### 10.3.1 Row/Column Processing

The first, and simplest, method of referring to a screen location is by row and column. For example, to move the cursor to the RECONNECT: entry field, which is at row 11 and column 41, you could enter

```
$conn1 fieldNext -position {9 41}
```

As we said, this is the simplest way of referring to a screen location, but it is also the least reliable. With each new release, text locations often change. For example, a new field may be added between the ENTITY and RECONNECT entry fields in Figure 10-1. In this case, the statements that reference the RECONNECT: entry field would have to be rewritten to reflect the new row and column locations. If you're testing multiple releases, you must have a script for each release. Each script in turn may reference this field several times. Rewriting all of the row/column statements may be increasingly tedious.

### 10.3.2 Label Processing

The second method of referring to a screen location is by label processing. In label processing the screen locations for fields are determined by a string *label* that appears on the screen. To find the ENTITY: entry field from [Figure 10-1](#) using label processing, you could enter

```
$conn1 fieldNext -label "ENTITY:"
```

**fieldNext** would search for the first occurrence of the string *ENTITY:* on the screen.

The default behavior of label processing is for the search to begin at the top left corner of the 3270 screen, proceeding left to right, top to bottom until it reaches the first occurrence of the label as a protected field, or until it reaches the end of the screen, in which case, an exception is thrown.

The different options that can be specified for label processing can be used to modify the default behavior.

- **-direction iteration** is used to specify which direction, and how many fields away, the desired field is located from the label. **-direction** can be *right*, *left*, *up*, and *down*. **iteration** is an integer, e.g., a valid entry would be **-right 12**. The default is **-right 1**.
- **-occurrence** is used to find the *i*'th occurrence of the label on the screen. The default occurrence is 1.
- **-unprotected** is used to find the label string on the screen, regardless of whether the label is a protected or unprotected field. This is mainly used for unformatted screens. The default is to find only labels that belong to protected fields.

The following is an example of a 3270 Tcl command that makes use of these label processing options. It finds the second occurrence of the label string "FISH" on the 3270 screen, moves down 2 fields, moves to the right 4 fields, and types "TROUT" at the beginning of the field found at that location.

```
$conn1 type -label "FISH" -occurrence 2 -down 2 \  
-right 4 -text "TROUT"
```

But what if the screen changes? Let's take a look at a few scenarios

- The label and field simply move. If there is only one occurrence of the label on the screen, then your script will still be able to find the correct location. If there are more than one occurrences of the label on the screen, you may have to change the **-occurrence** option.
- The label and field stay at the same location, but the name of the field changes. All this may require is a simple search and replace in the script using your favorite editor to reflect the new name. If the length of the label has changed, you may will also have to add or change the **-direction** option, but you may be able to do this by a search and replace, too.

- The label stays at the same location, but its name changes and the location of the field moves. This will probably require a great deal more work, especially if you're performing tests on multiple releases.

Like row/column processing, label processing is very easy to set up, but, if the screens change, it takes less work to rewrite your scripts. Scripts using label processing are also easier to read since the location entries are the exact string as it appears on the screen and not (sometimes) cryptic row/column coordinates.

**NOTE** — A label is any string on the screen contained in a protected field. The MYNAH Script Builder has the ability to generate labels for the various Term3270 commands, if Label processing option is selected. It is easier to let the Script Builder generate the labels. This way, the generated scripts would get executed without any errors. If there are any errors in execution of the generated code, please contact MYNAH Support. You may choose a label manually and code it in the script, but there exists a risk of the label getting rejected in a few cases.

### 10.3.3 Tag Name Processing

The third method of referring to a screen location is by tag name processing, where scripting statements are written using user-defined labels called **tags** that reference locations on a screen in place of row and column integer values. These definitions reside in files called **Tag Name** files. Multiple scripts can reference these files. If the format of the screen changes, only the definitions of the tags related to the screen need to be updated. For example, to move to the RECONNECT: entry field on [Figure 10-1](#) using tag name processing, assuming there is a tag for this screen called *recon*, you could type

```
$conn1 fieldNext -tag recon
```

The MYNAH script accesses the appropriate *Tag Name* files to determine the row and column coordinates associated with the tag names in the script. The *Tag Name* files are loaded using the format method, as in

```
$conn1 format MainMenu
```

where *MainMenu* is a *Tag Name* file.

**NOTE** — A user or the MYNAH Administrator must have set up Tag Name files prior to anyone trying to use them. The MYNAH Administrator will then save the Tag Name file in a special directory, called the **TagDirectory**, used to contain Tag Name files. The steps for creating *Tag Name* files are found in Section 7 of the *MYNAH System Administration Guide*.

Like label processing, scripts using tag names are easier to read since you're using text, quite often related to what is actually on the screen, to determine a screen location.

When a field's position changes, only the row and column values associated with the tag names in the *Tag Name* files have to be changed rather than every reference to the affected row and column or label values in the scripts.

Unlike row/column and label processing, which can be used immediately, tag name processing requires a great deal of preliminary setup. As we mentioned earlier, they must first be created and then the MYNAH Administrator must place them in the *TagDir*. If a position changes, you must inform the MYNAH Administrator to make the necessary changes to the appropriate *Tag Name* file. If you use row/column and label processing you can immediately change your scripts.

Tag name processing also uses the *Screen Identification* file, which makes it possible to generate format/screen names automatically.

The *Screen Identification* file is needed to identify the format/screen the user is on and to generate a format statement during an initial script capture session using the GUI's Script Builder.

The *Screen Identification* file contains regular expression patterns (as defined for the **regex(3X)** program) in conjunction with screen location. As a user navigates through an application, the *Screen Identification* file determines if these two conditions exist

- The format/screen name exists on the format/screen being displayed
- A regular expression can be defined to uniquely describe the format/screen name.

If these conditions determine that a string matching a pattern is found at a particular location on the current screen, the system identifies that portion of the screen that matches the pattern as the format for the screen. Once this format is determined, a statement is generated, and this statement is then used to load a *Tag Name* file of the same name.

## 10.4 xmyTerm3270 Class

**xmyTerm3270** is the Tcl class command providing language extensions that are necessary for interactions with the 3270 device. Its methods provide the basis of operations on a 3270 connection that you will need to create sufficiently sophisticated test cases in your scripts.

### 10.4.1 Methods

The Term3270 package contains the following methods.

#### 10.4.1.1 compare

##### Syntax

```
handle compare -dimension dimension \  
    -expect {body of compare pattern} ?-expectMaster xyz? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-outputLabel label?  
  
handle compare -region region \  
    -expect {body of compare pattern} ?-expectMaster xyz? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-outputLabel label?  
  
handle compare -tag tagname -dimension dimension \  
    -expect {body of compare pattern} ?-expectMaster xyz? \  
    ?-offset offset? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-outputLabel label?  
  
handle compare -label label -dimension dimension \  
    -expect {body of compare pattern} ?-expectMaster xyz? \  
    ?-offset offset? \  
    ?-direction iteration? ?-occurrence occurrence? \  
    ?-searchFrom? ?-unprotected? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-outputLabel label?
```



## Return

- 0 for failure
- 1 for success

## Description

The **compare** method compares a region in the current 3270 display screen of a connection with the **compare** pattern body. When the location is not specified, **compare** uses the current cursor position. If a failure occurs, **compare** increments the connection's **-failedCompares** attribute by 1. If a success occurs, it increments the connection's **-goodCompares** attribute by 1.

**NOTE** — See [Table 10-3](#) for descriptions of the **compare** attributes.

If you use tagname processing (the third form shown above) and you set the **-dimension** attribute's width to zero (0), **compare** enters the width for this tagname entered in the tagname file.

The **-warning** flag tells the **compare** statement to log a warning should the comparison fail, rather than log a compare failure.

**-outputLabel** is used to specify a label for this particular **compare** command that will be written into the output file. The label from the output file can be used to refer back to the **compare** command in the input script. This is for cross reference purposes only.

## Example

In this first example, the expect value is *A*.

```
> set result [$conn1 compare -region {10 20 1 1} \  
             -expect {{A}}
```

In this second example, the *expect* attribute's argument is a variable. The variable's value must be a list.

```
> set t1 {"MAIN MENU"}  
> $conn1 compare -tag "title" -expect $t1 \  
             -outputLabel "Label number one"
```

## Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred
- Error obtaining region from specified region values

### 10.4.1.2 connect

#### Syntax

```
xmyTerm3270 connect \  
    ?-host hostnamelist? \  
    ?-model model #? \  
    ?-port portnumber? \  
    ?-compareInvisibleFields boolean? \  
    ?-TN3270E boolean? \  
    ?-timeout seconds? \  
    ?-showAttributes boolean? \  
    ?-initialWait boolean? \  
    ?-initialWaitExpect string expression? \  
    ?-name connection name? \  
    ?-collectKeyCount boolean? \  
    ?-tagDir tagname directory? \  
    ?-screenIdFile screenid file? \  
    ?-XLT TranslatePath?
```

#### Return

Handle to **xmyTerm3270** instance

#### Description

The **connect** method is used to establish a connection to the 3270 host from the MYNAH Tcl script. **connect** returns a handle to a connection back to the script. Defaults are provided for port (23, or Telnet) and model number (2) should they not be specified within the script. The attribute list provides the instance of **xmyTerm3270Conn** class with initial values that will impact the configuration of this singular connection. Attribute values that can be set and are not supplied will attain their values after the loading of the 3270 extension package, where the class attribute values will be set depending on what is available through configuration files.

**NOTE** — Only 24 3270 connections can be open at a given time from a single script execution. If a script opens more than 24 scripts at one time, scripts from a standalone engine will hang and scripts running from a background engine will fail.

**connect** takes has the following attributess

**-host *hostnamelist***

The name of the host. You can specify more than one host.

This overrides the **Host** setting in the *xmyConfig* file.

<b>-model</b> <i>model #</i>	The name of the model for the connection.
<b>-port</b> <i>portnumber</i>	The name of the port number.
<b>-compareInvisibleFields</b> <i>boolean</i>	Indicates whether invisible fields should be processed.
<b>-TN3270E</b> <i>boolean</i>	Supports TN3270E protocol for connecting to a host that begins transmission in TN3270E.
<b>-timeout</b> <i>seconds</i>	The amount of time that the connection will wait to receive a solicited screen.
<b>-showAttributes</b> <i>boolean</i>	Indicates whether to write an application's screen attribute bytes to the <i>SUTimage</i> file.
<b>-initialWait</b> <i>boolean</i>	Indicates whether an initial read should be performed during logon.
<b>-initialWaitExpect</b> <i>string expression</i>	The string expression that <b>initialWait</b> should wait for.
<b>-name</b> <i>connection name</i>	A name for the connection handle.
<b>-collectKeyCount</b> <i>boolean</i>	Indicates whether or not a function key count should be kept.
<b>-tagDir</b> <i>tagname directory</i>	Indicates the path(s) to look for tag name files.
<b>-screenIdFile</b> <i>screenid file</i>	Indicates the name of the screen Identification file.
<b>-XLT</b> <i>TranslatePath</i>	Specifies the location of the EBCDIC-ASCII translation file, which is used to define the presentation space while making a 3270 connection.  This overrides the <b>TranslatePath</b> setting in the <i>xmyConfig</i> file.

**NOTE** — All boolean based options are either TRUE or FALSE.

To specify more than one host name, create a list of host names, using one or more spaces to separate the list items, and enclose the list within double quotes. (Curly brackets are allowed in a Tcl script.). Spaces are the only valid separators.

If you specify multiple hosts, the MYNAH System uses the first name on the list when trying to establish a connection. If the connection is successful, the remaining specified host names are ignored. If the connection fails for any reason, the MYNAH

System attempts to use each successive host name until a successful connection is made or the end of the list is reached. Upon successful connection, the return will be a handle to the **xmyTerm3270** instance. For each failed connection, an error message, with the hostname, is generated. If no connection can be established with any host from the list, then the following error message is generated:

*Unable to establish connection to any host.*

On a per connection basis, the attributes **-initialWait**, **-host**, **-model**, **-port**, **-name**, and **-TN3270E** can only be set through this initial connect call.

**connect** automatically creates a handle name, using the form **.xmyTerm3270\_n+**. Each successive connection increments the count, i.e., the first handle would be **.xmyTerm3270\_1**, and the second would be **.xmyTerm3270\_2**. While you can use these relative handle names, using the **set** command, as in the following example, creates an absolute handle name.

### Example

This example illustrates specifying a specific host and the location of the EBCDIC-ASCII translation file.

```
> set conn1 [xmyTerm3270 connect -host pyib1 -model 2 \  
            -port 23 -XLT=$XMYHOME/data/misc/SMS800.xlate]  
.xmyTerm3270_1
```

This example illustrates specifying multiple hosts.

```
> set conn [xmyTerm3270 connect -host "xyz pyibm4 abc"]
```

### Exceptions

If an exception is raised, the connection is not made.

- System error occurred, can't connect to host
- Connection can not be made, maximum number of EHLLAPI sessions reached
- Time-out
- Licensing problems.

### 10.4.1.3 disableMask

#### Syntax

```
handle disableMask {list of maskhandles}
```

#### Return

No result

#### Description

The **disableMask** method disables a mask object that has been activated for a particular connection instance through the **enablemask** method. After **disablemask**, any subsequent compare statements on the connection will no longer ignore the pattern defined in the mask object.

#### Example

```
> $conn1 disableMask $mask1 $mask2 $mask3
```

#### Exceptions

- Mask handle not enabled on connection

#### 10.4.1.4 disconnect

##### **Syntax**

*handle* disconnect

##### **Return**

No result

##### **Description**

The **disconnect** method destroys a connection made to the host through the **connect** method. Once the disconnect call has been made, the connection is no longer valid and can not be used. The handle is deregistered from the Tcl name space and is no longer recognized by the interpreter.

##### **Example**

```
> $conn1 disconnect
```

##### **Exceptions**

System error has occurred

#### 10.4.1.5 enableMask

##### Syntax

```
handle enableMask {list of mask handles}
```

##### Return

No result

##### Description

The **enableMask** method enables an already created mask object, using **xmyMask** ([Section 7.2.10](#)), for a particular connection instance. Any subsequent compare statements on the connection will ignore the pattern defined in the mask object.

##### Example

```
> $conn1 enableMask $mask1 $mask2 $mask3
```

##### Exceptions

Illegal mask handle(s) given to command

#### 10.4.1.6 fieldBegin

##### Syntax

```
handle fieldBegin
handle fieldBegin -position position
handle fieldBegin -tag tagname ?-offset offset?
handle fieldBegin -label label ?-offset offset?
```

##### Return

No return

##### Description

The **fieldBegin** method moves the cursor to the first position of the field located by the given location parameters. When no location parameters are supplied, **fieldBegin** uses the current cursor position. The location given could be any position within that field.

**NOTE** — See [Table 10-3](#) for descriptions of the **fieldBegin** attributes.

##### Example

This moves the cursor to the beginning of the field found at location row = 2 and column =5.

```
> $conn1 fieldBegin -position {2 5}
```

##### Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred



### 10.4.1.7 fieldLength

#### Syntax

```
handle fieldLength
handle fieldLength -position position
handle fieldLength -tag tagname ?-offset offset? \
    ?-protectedField?
handle fieldLength -label label
    ?-offset offset? ?-direction iteration? \
    ?-occurrence occurrence? -searchFrom? ?-unprotected?
```

#### Return

Length of the specified field

#### Description

The **fieldLength** method returns the length of the current field (or the target field) from the given location parameters. When no location parameters are supplied, **fieldLength** uses the current cursor position.

**NOTE** — See [Table 10-3](#) for descriptions of the **fieldLength** attributes.

#### Example

```
> $conn1 fieldLength -label "PASSWORD:" -occurrence 1 \
    -right 1
8
```

#### 10.4.1.8 fieldNext

##### Syntax

```
handle fieldNext
handle fieldNext ?-protectedField?
handle fieldNext -position position
handle fieldNext -tag tagname ?-offset offset?
handle fieldNext -label label ?-protectedField?
    ?-offset offset? ?-direction iteration? \
    ?-occurrence occurrence ? ?-searchFrom? ?-unprotected?
```

##### Return

No return

##### Description

The **fieldNext** method moves the cursor to the first position of the unprotected field specified by the given location parameters. When no location parameters are supplied, **fieldNext** uses the current cursor position.

**NOTE** — See [Table 10-3](#) for descriptions of the **fieldNext** attributes.

##### Example

```
> $conn1 fieldNext -label "USERID:" -occurrence 1 \
    -right 1
```

##### Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred

#### 10.4.1.9 find

##### Syntax

```
handle find -string string ?-occurrence occurrence? \  
?-searchFrom?
```

##### Return

Position of string

##### Description

The **find** method finds the specified string on the current screen and returns the row and column position of its location. The **-occurrence** parameter is used to find the *i*'th occurrence of the given string on the screen. **-searchFrom** tells **find** to use the current cursor position; otherwise, the top lefthand corner is used as the starting point.

**NOTE** — See [Table 10-3](#) for descriptions of the **find** attributes.

The search does not wrap the screen, i.e., the search stops when the lower right position is reached.

##### Example

```
> $conn1 find -string "system" -occurrence 1  
{8 17}
```

##### Exceptions

String not found

#### 10.4.1.10 findLabel

##### Syntax

```
handle findLabel -label label ?-occurrence occurrence? \  
?-searchFrom? ?-unprotected?
```

##### Return

Position of label

##### Description

The **findLabel** method finds the specified label on the current screen and returns the row and column position of its location.

In addition to the **-lable** attribute (see [Table 10-3](#)), **findLabel** takes the following attributes:

- |                                      |   |
|--------------------------------------|---|
| <b>-occurrence <i>occurrence</i></b> | Used to find the <i>i</i> 'th occurrence of the label on the screen.  |
| <b>-searchFrom</b>                   | Tells <b>findLabel</b> to use the current cursor position; otherwise, the top lefthand corner is used as the starting point.          |
| <b>-unprotected</b>                  | Tells <b>findLabel</b> to consider unprotected instances of the label on the screen; otherwise, only protected labels are considered. |

The search does not wrap the screen, i.e., the search stops when the lower right position is reached.

##### Example

```
> $conn1 findLabel -label "CENTER" -occurrence 2  
{20 30}
```

##### Exceptions

Label not found

#### 10.4.1.11 format

##### Syntax

```
handle format screenid
```

##### Return

No result

##### Description

The **format** method is used solely for the purpose of finding screen locations through tagnames, defined in tag name files. Tag name files are named after the screen id of the screen they correspond to.

If tagnames are used, this statement should follow any screen update and precede any commands done to that screen. The *screenid*, a unique screen identifier sent from the host, is either located at the top screen label or in the user's *Screen Identification* file.

If no *screenid* argument is supplied, **format** does nothing.

##### Example

This **format** method loads the tag name file *clear*.

```
> $conn1 format clear
```

This **moveCursor** command will use a tag from the *clear* tag name file, called *clear1tag*.

```
$conn1 moveCursor -tag "clear1tag" -offset 0
```

##### Exceptions

- Illegal screen tagname table format
- Screen does not correspond to tag name file

#### 10.4.1.12 `getAttribute`

##### Syntax

```
handle getAttribute
handle getAttribute -position position
handle getAttribute -tag tagname ?-offset offset?
handle getAttribute -label label ?-offset offset? \
    ?-direction iteration? ?-occurrence occurrence? \
    ?-searchFrom? ?-unprotected?
```

##### Return

List of attribute descriptors

##### Description

The **getAttribute** method is used to find the attribute byte value of a location in the connection object's display, specified by the parameters to **getAttribute**. When location is not specified, **getAttribute** returns attribute value for the current cursor position.

**NOTE** — See [Table 10-3](#) for descriptions of the **getAttribute** attributes.

##### Example

```
> $conn1 getAttribute -position {10 20}
{UNPROTECTED INVISIBLE}
```

##### Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred
- No attribute byte was found (unformatted presentation space)

### 10.4.1.13 ignore

#### Syntax

```
handle ignore -dimension dimension
handle ignore -region region
handle ignore -tag tagname -dimension dimension \
    ?-offset offset?
handle ignore -label label -dimension dimension \
    ?-offset offset? ?-direction iteration? \
    ?-occurrence occurrence? ?-searchFrom? \
    ?-unprotected?
```

#### Return

No result

#### Description

The **ignore** method defines a region to ignore on a 3270 display screen. This ignore region is active on all subsequent statements that permit the **-ignore** region option. Once a program function key is pressed, the ignore is no longer active. When location is not specified, **ignore** uses the current cursor position.

**NOTE** — See [Table 10-3](#) for descriptions of the **ignore** attributes.

#### Example

```
> $conn1 ignore -tag "Dates" -offset 0 -dimension {1 1}
```

#### Exceptions

- Error performing screen location processing
- Illegal screen position

#### 10.4.1.14 listAttributeTypes

##### Syntax

```
xmyTerm3270 listAttributeTypes  
handle listAttributeTypes
```

##### Return

List of attribute descriptors and descriptions for each listing.

##### Description

The **listAttributeTypes** method lists all of the attribute descriptors and provides descriptions for each of the descriptors.

##### Example

```
> xmyTerm3270 listAttributeTypes  
UNPROTECTED      - unprotected field  
MODIFIED          - modified field  
UNMODIFIED        - unmodified field  
PROTECTED         - protected field  
HIGHLIGHTED      - highlighted field  
INVISIBLE         - invisible field  
NUMERIC           - numeric field
```



#### 10.4.1.15 moveCursor

##### Syntax

```
handle moveCursor -position position
handle moveCursor -tag tagname ?-offset offset?
handle moveCursor -label label ?-offset offset? \
    ?-direction iteration? \
    ?-occurrence occurrence? ?-searchFrom? ?-unprotected?
```

##### Return

No return

##### Description

The **moveCursor** method moves the cursor to the position specified in the given parameters in the particular connection's 3270 display. If the provided screen location is not a modifiable field, **moveCursor** behaves similarly to **fieldNext** by finding the next rightward modifiable field relative to the supplied position.

**NOTE** — See [Table 10-3](#) for descriptions of the **moveCursor** attributes.

##### Example

```
> $conn1 moveCursor -tag "Login" -offset 0
```

##### Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred

#### 10.4.1.16 screen

##### Syntax

```
handle screen -dimension dimension \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-file filename? ?-append? \  
    ?-compareInvisibleFields?  
  
handle screen -region region \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-file filename? ?-append? \  
    ?-compareInvisibleFields?  
  
handle screen -tag tagname -dimension dimension \  
    ?-offset offset? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-file filename? ?-append? \  
    ?-compareInvisibleFields?  
  
handle screen -label label -dimension dimension \  
    ?-offset offset? ?-direction iteration? \  
    ?-occurrence occurrence? ?-searchFrom? \  
    ?-unprotected? \  
    ?-ignore region? ... ?-ignore region? \  
    ?-mask maskhandle? ... ?-mask maskhandle? \  
    ?-file filename? ?-append? \  
    ?-compareInvisibleFields true/false?
```

##### Return

Portion of the screen specified through location and dimensions

##### Description

The **screen** method returns a block of data defined by the width and height parameter, starting at the location specified by the given location parameters. When no location parameters are supplied, **screen** uses current cursor position.

**NOTE** — See [Table 10-3](#) for descriptions of the **screen** attributes.

In addition to the attributes listed in [Table 10-3](#), the **screen** method also accepts the **-compareInvisibleFields** attribute. If **-compareInvisibleFields** is set to *true*, then invisible fields on the screen that occur within the given region are picked up. The default value is *false*.

### Example

```
> $conn1 screen -region {1 1 14 1}  
"ENTER USER ID-"
```

### Exceptions

- Error performing screen location processing
- Illegal screen position
- Illegal region specified
- System error has occurred

#### 10.4.1.17 send

##### Syntax

```
handle send 3270key
```

##### Return

No result

##### Description

The **send** method simulates the pressing of a 3270 function key to the host for this particular connection. It does not wait for a response from the host, and script execution is resumed upon transmission of the key input.

The 3270 keys that can be taken as an argument to this function are shown in [Table 10-4](#).

**Table 10-4.** 3270 Function Keys

pf1-24	attention	leftTab	cursorUp
pa1-3	sysReq	rightTab	cursorDown
clear	cent	cursorLeft	delete
enter	not	cursorRight	backspace
reset	home	eraseEOF	

**NOTE** — The pa-2 key has a default timeout of 5 seconds.

##### Example

```
> $conn1 send pf-1
```

##### Exceptions

- Error inputting key
- System error has occurred

#### 10.4.1.18 sendWait

##### Syntax

```
handle sendWait -key 3270key ?-expect tcl_expression? \  
?-timeout seconds?
```

##### Return

No result

##### Description

The **sendWait** method sends a special function key to the 3270 SUT and waits for the SUT's reply before resuming execution of the script. A Tcl regular expression can be passed to provide the wait mechanism with a condition that, when found, should return control back to the script. If no regular expression is provide, the first response back from the host returns control back to the script. The same keys are supported as with the **send** method, but **sendWait** is only meaningful when the key pressed is one that causes the 3270 SUT to respond with screen(s) of data. The timeout attribute specifies the number of seconds to wait before **sendWait** returns control back to the script.

The **-key** attribute lets you specify the 3270 key to send to the SUT. The 3270 keys that can be taken as an argument to this function are shown in [Table 10-4](#).

##### Example

```
> set waitstring "INPUT APPLICATION NAME AND PRESS ENTER"  
> $conn1 sendWait -key pf-3 -expect $waitstring
```

##### Exceptions

Timeout reached, SUT has not returned, timeout handler called

#### 10.4.1.19 type

##### Syntax

```
handle type -text text
handle type -position position -text text
handle type -tag tagname -text text ?-offset offset?
handle type -label label -text text \
    ?-offset offset? ?-direction iteration? \
    ?-occurrence occurrence? ?-searchFrom? \
    ?-unprotected?
```

##### Return

No result

##### Description

The **type** method sends the keystrokes defined within the *text*, beginning at the location specified by the parameters to this statement.

If the specified location is not a modifiable field, an error message will be written in the output file, but the command itself will succeed. The keyboard will not be locked.

When a location is not specified, **type** uses the current cursor position. **type** moves the cursor to the location where the typing has ended. In the event that **type** fails, the cursor position remains unchanged.

**NOTE** — See [Table 10-3](#) for descriptions of the **type** attributes.

##### Example

```
> $conn1 type -label "login" -text "tktee99"
```

##### Exceptions

- Error performing screen location processing
- Illegal screen position
- System error has occurred
- Error entering data (keyboard locked, system busy, protected field, etc.)

#### 10.4.1.20 wait

##### Syntax

```
handle wait ?-expect string? ?-timeout seconds?
```

##### Return

No result

##### Description

The **wait** method blocks the script until a screen is received from the host or returns immediately if a screen has already been received from the host.

After each screen is sent to the host, the connection keeps track of the number of screens received from the host that have not been waited on yet.

When **wait** is used without an **-expect** option, it performs one of the following:

- Returns as soon as any screen is received
- Returns immediately if a screen has already been received that has not been waited on yet
- Aborts when the **timeout** expires.

When **wait** is used with an **-expect** option, it performs one of the following:

- Returns as soon as a screen is received that contains the expected string
- Returns immediately if the last screen received has not been waited on yet **and** contains the expected string
- Aborts when the **timeout** expires.

If a **timeout** value of zero is specified, the **wait**

- Returns immediately if the correct screen has been received (depending on the **-expect** option)
- Aborts immediately if the correct screen has not been received.

Using a **timeout** value of zero is rarely necessary.

In general, a **send** method followed by a **wait** method is identical in behavior to a **sendWait** method, with the following exception.

In situations where a screen is sent and no screens are expected, the **wait** method is not needed. If a **sendWait** method is used, though, it will attempt to identify the fact that no screen is expected and return immediately. However, if a **send** is followed by a **wait** in this situation, the **wait** will time out waiting for a screen to be received.

## Example

Following are four functionally identical logoff procedures that assume that after the **PF-3** key is sent, two screens are received from the host.

```
#
proc logoff1 {conn} {
    $conn send pf-3
    $conn wait
    $conn wait
}

proc logoff2 {conn} {
    $conn send pf-3
    $conn wait -expect "PRESS ENTER"
}

proc logoff3 {conn} {
    $conn sendWait -key pf-3
    $conn wait
}

proc logoff4 {conn} {
    $conn sendWait -key pf-3 -expect "PRESS ENTER"
}
```

## Exceptions

Timeout reached, SUT has not returned, timeout handler called.



## 10.4.2 Attributes

For an attribute that can be set, if no value is ever specified, the default is obtained first from the value of the attribute at a class level, which initially had obtained its values from the SE configuration class object. Attributes on a class level derive their values from configuration files initially, but thereafter can be set in a script. In **Stateless** and **ConnOnly** modes, class attributes that are changed in a script will be reset to the value stored in configuration prior to the execution of the next script. Class level attribute values will affect subsequent instantiations of the class, which will inherit these values. Instance level attributes can be used to set attributes on a per connection basis, overriding any values inherited from the class level. Some attributes, however, can only be set at the time of connection and can not be changed after the connect call.

When attributes are used without being given a value, either on a class or instance level, the current value of that attribute is returned as output. Still other attributes cannot be set at all, and are used merely to display stored information about a connection at a particular moment. These attributes can not take arguments. Typically, with few exceptions, these attributes have no meaning on a class level. (W/R) denotes an attribute that is readable and writable. (R) means the attribute is only readable.

### 10.4.2.1 -column (R)

#### Syntax

```
handle -column
```

#### Description

The **column** attribute outputs the cursor's current column position.

### 10.4.2.2 -collectKeyCount (W/R)

#### Syntax

```
xmyTerm3270 -collectKeyCount ?boolean?
```

#### Description

The **collectKeyCount** attribute indicates whether or not a function key (entered through the **send** or **sendWait** methods) count should be kept.

#### 10.4.2.3 -compareInvisibleFields (W/R)

##### Syntax

```
handle -compareInvisibleFields ?boolean?  
xmyTerm3270 -compareInvisibleFields ?boolean?
```

##### Description

The **compareInvisibleFields** attribute indicates whether invisible fields should be processed by statements done to a particular connection.

FALSE - don't process  
TRUE - process.

#### 10.4.2.4 -connections (R)

##### Syntax

```
xmyTerm3270 -connections
```

##### Return

List of currently open 3270 connections by their Tcl name

##### Description

The **-connections** attribute lists the names of all the 3270 connections currently available.

##### Example

```
> xmyTerm3270 -connections  
{ .xmy327001 .xmy327002 .xmy327003 .xmy327004 }
```

#### 10.4.2.5 -dataBytesReceived (R)

##### Syntax

```
handle -dataBytesReceived
```

##### Description

The **dataBytesReceived** attribute returns the number of bytes received in the last message from the host.

#### 10.4.2.6 -failedCompares (R)

##### Syntax

```
handle -failedCompares
```

##### Description

The **failedCompares** attribute returns the number of failed compares performed so far on the connection.

#### 10.4.2.7 -formatName (R)

##### Syntax

```
handle -formatName
```

##### Description

The **formatName** attribute returns the format/screen name of a connection's current screen. Format/screen name is initially found through the *Screen Identification* file, which maps a screen's identifier to the proper tag name file.

#### 10.4.2.8 -goodCompares (R)

##### Syntax

```
handle -goodCompares
```

##### Description

The **goodCompares** attribute returns the number of good compares performed so far on the connection.

#### 10.4.2.9 -host (W/R)

##### Syntax

```
handle -host  
xmyTerm3270 -host ?hostname?
```

##### Description

The **host** attribute is used to output the name of the host to which the **xmyTerm3270** instance is connected. **host** cannot be used to reset host information. This attribute can only be set at connection time, as an argument to the **connect** class method.

If multiple host names are specified on the **connect** statement, **host** returns the name of the one host to which that instance is connected.

#### 10.4.2.10 -initialWait (W/R)

##### Syntax

```
handle -initialWait  
xmyTerm3270 -initialWait ?boolean?
```

##### Description

The **initialWait** attribute indicates whether an initial read should be performed during logon.

FALSE- don't read  
TRUE - read.

Default: TRUE.

#### 10.4.2.11 -initialWaitExpect (W/R)

##### Syntax

```
handle -initialWaitExpect  
xmyTerm3270 -initialWaitExpect ?string expression?
```

## Description

The **initialWaitExpect** attribute supplies the string expression that **initialWait** should wait for. No expression means wait for the first screen to be sent from the host.

### 10.4.2.12 -keyCount (R)

#### Syntax

```
xmyTerm3270 -keyCount
```

#### Description

The **keyCount** attribute displays the number of program keys pressed for all 3270 connections.

### 10.4.2.13 -lastKeyPressed (R)

#### Syntax

```
handle -lastKeyPressed
```

#### Description

The **lastKeyPressed** attribute indicates the name of the last program function key or enter key pressed.

### 10.4.2.14 -lastResponseTime (R)

#### Syntax

```
handle -lastResponseTime
```

#### Description

The **lastResponseTime** attribute returns the time between last **send** and when the new **screen** ready on the connection. The information stored in this attribute will also be used when logging performance output, the response time between a **send**, and when the SUT has responded back accordingly.

#### 10.4.2.15 -lastTransmitTime (R)

##### Syntax

```
handle -lastTransmitTime
```

##### Description

The **lastTransmitTime** attribute returns the last time a **send** was done on this connection.

#### 10.4.2.16 -masks (R)

##### Syntax

```
handle -masks
```

##### Description

The **masks** attribute returns a list of all of the mask handles associated to a particular connection through the **enableMask** instance method.

##### Example

```
> $conn1 -masks  
.xmyMask01 .xmyMask02 .xmyMask03
```

#### 10.4.2.17 -model (W/R)

##### Syntax

```
handle -model  
xmyTerm3270 -model ?model number?
```

##### Description

The **model** attribute is used to output the name of the model the **xmyTerm3270** instance is configured. **model** cannot be used to reset model information. This attribute is useful when determining row or column from a 3270 display character position value. **model** can only be set at connection time, as an argument to the **connect** class method.

#### 10.4.2.18 -name (W/R)

##### Syntax

```
handle -name  
xmyTerm3270 connect -name ?connection Name?
```

##### Description

In the first form, the **name** attribute returns the connection name for a specified handle, e.g., **.xmyTerm3270\_x**.

In the second form, the name of the connection handle can be changed at the time of connection.

#### 10.4.2.19 -port (W/R)

##### Syntax

```
handle -port  
xmyTerm3270 -port ?port number?
```

##### Description

The **port** attribute outputs the name of the port number to which the **xmyTerm3270** instance is connected. **port** cannot be used to reset port number information. This attribute can only be set at connection time, as an argument to the **connect** class method.

#### 10.4.2.20 -queryConnection (R)

##### Syntax

```
handle -queryConnection
```

##### Description

The **queryConnection** attribute returns the connections's state.

- BUSY - The connection is busy
- READY - The connection is ready
- DOWN - The connection is down
- LOCKED - The keyboard is locked

#### 10.4.2.21 -row (R)

##### Syntax

```
handle -row
```

##### Description

The **row** attribute outputs the cursor's current row position.

#### 10.4.2.22 -screenIdFile (W/R)

##### Syntax

```
handle -screenIdFile ?file?
```

```
xmyTerm3270 -screenIdFile ?file?
```

##### Description

The **screenIdFile** attribute indicates the file from which the screen identification information is to be taken. It can be set only at connect time.



#### 10.4.2.23 -showAttributes (W/R)

##### Syntax

```
handle -showAttributes ?boolean?  
xmyTerm3270 -showAttributes ?boolean?
```

##### Description

The **showAttributes** attribute writes the application's screen attribute bytes to the *SUTimage* file.

- TRUE - write
- FALSE - don't write.

#### 10.4.2.24 -status (R)

##### Syntax

```
handle -status
```

##### Description

The **status** attribute returns the connection's status, whether it is alive(up) or not (down).

- 0 - The connection is down
- 1 - The connection is up.

#### 10.4.2.25 -tagDir (W/R)

##### Syntax

```
handle -tagDir ?path?  
xmyTerm3270 -tagDir ?path?
```

##### Description

The **tagDir** attribute indicates the path(s) to look for tag name files.

#### 10.4.2.26 -timeout (W/R)

##### Syntax

```
handle -timeout ?seconds?  
xmyTerm3270 -timeout ?seconds?
```

##### Description

The **timeout** attribute returns or sets the amount of time that the connection will wait to receive a solicited screen before returning control back to the script.

#### 10.4.2.27 -TN3270E (W/R)

##### Syntax

```
handle -TN3270E  
xmyTerm3270 -TN3270E ?boolean?
```

##### Description

The **TN3270E** attribute supports the TN3270E protocol for connecting to a host that begins transmission in TN3270E. For a connection, **TN3270E** can only be set at connect time.

#### 10.4.2.28 -warningCompares (W/R)

##### Syntax

```
handle -warningCompares
```

##### Description

The **warningCompares** attribute returns the number of warnings generated during compares so far on the connection.

## 10.5 3270 Procedures

This section describes Tcl procedures delivered with the MYNAH System that are design specifically to aid 3270 scripting.

**NOTE** — Currently, there is only one 3270 specific procedure.

### 10.5.1 xmyPrintScreen

#### Syntax

```
xmyPrintScreen handle Destination
```

#### Return

Prints an entire Async screen

#### Description

The **xmyPrintScreen** procedure prints the entire 3270 screen based on the entered 3270 connection handle. The ***Destination*** can be `stdout`, `stderr`, or a filename.

#### Example

The following usage prints the entire 3270 screen to the standard output.

```
> xmyPrintScreen $conn_3270 stdout
```

## 10.6 When to use send and sendWait Methods

3270 scripts may potentially run faster than the host can respond, such as when the script is running in a background SE (where scripts run significantly faster than in the foreground). In this case a script which works fine in the foreground may fail when executed in the background. However, the timing problems could occur in foreground, too. Thus a script, which normally works fine in foreground, may fail occasionally.

To avoid such occurrences, you should always account (in your script) for the current position relative to the host before proceeding with additional scripting. This will ensure that the script does not continue sending data and functions keys to the host before the host is ready for the data or keys. This will keep the script and the host synchronized.

### 10.6.1 MYNAH send and sendWait Methods

The MYNAH 3270 Language Extension Package contains the **send** and **sendWait** methods to send a key to the host (for example, **pf-1**, **Enter**, **Home**). These methods cannot be used interchangeably.

**send** is used in situations where you do not expect a new screen to come back, for example, the **home** key.

To aid the checking process, the **sendWait** method, which waits for the next changed screen to come back, was added to compliment the **send** method. In addition, the **-expect** attribute waits until a particular string appears on the 3270 screen, such as ***FIND SUCCESSFUL*** on line 24 of a particular IMS application. If you use the **-expect** attribute, you must specify the expected string.

The MYNAH System compares a new screen against the old one. If there is no change, the MYNAH System waits for another indication of a new screen arrival until a new changed screen actually arrives or until there is a timeout.

The timeout on a **sendWait** does not result in an error (which it would result in termination of script) if the **sendWait** method is used erroneously. However, if you use a **-expect** clause on the **sendWait**, the timeout will result in an error. To alter this behavior, the errors in a script can be handled with the use of the **catch** command. **catch** is basic Tcl command that will ensure that the script does not terminate in case of errors but will give the control back to the user to handle error processing.

The following example illustrates the use of the **catch** statement; it should be followed by code to check for the variables **t1** and **errMsg**.

```
set t1 [catch {$conn1 sendWait -key pf-1 \  
            -expect "SUCCESSFUL"} errMsg]
```

**sendWait** is a combination of the **send** and **wait** methods. If some processing needs to be performed while the script waits for a response from the host, the two methods can be used separately, as in the following:

```
$conn1 send pf-1  
<some other processing, not related to this connection>  
$conn1 wait
```

As a rule of thumb, use **sendWait** if you are expecting a response to your key stroke (for example keys such as **Enter**, **pf-1**, **pf-3**). Use **send** when you do not expect a changed screen to come back, (for example, the **End** key). If you use them interchangeably, you can run into the timing problems. The following two cases illustrate improper usage scenarios.

- Case 1 If you use **send** instead of **sendWait**, the next method you execute could fail if the host is still working on getting the changed screen back to you. It will give a *system is busy* error message. The fix for such situations is to replace the **send** with a **sendWait**.
- Case 2 If you use **sendWait** instead of **send**, this is not a harmful scenario. The script will wait for the next changed screen to come back and there is no changed screen coming back in this case. The script will wait for the amount of time specified in timeout. There is no damage done, it is just a waste of time.

## 10.6.2 Summarization

1. When in doubt, use **sendWait** method instead of a **send** method.
2. Normally, a **sendWait** by itself is good enough, but if you know what string you are expecting, you are better off coding a **-expect** clause. This is a sure way of synchronizing the script with the host response.
3. Do not use a high value for timeout in 3270 configuration or on the **connect** method. A value of about 30 seconds should be good enough to take care of slow responses from hosts and at the same time does not cause too much of delays in case of erroneous usage of the **sendWait** method.




## 11. General Application-to-Application Tcl Language Extensions

The MYNAH General Application-to-Application (AppApp) extension package provides functionality necessary for interaction with a SUT thru an application specific interface.

### 11.1 Overview

The application specific interface, called the Interface Collector, contains the necessary logic to communicate with the SUT. Connections can be opened to the SUT and messages sent and received to and from it. The MYNAH System uses TCP/IP to communicate with the Interface Collector. The Interface Collector may use any protocol which the SUT understands. [Figure 11-1](#) illustrates this interaction.

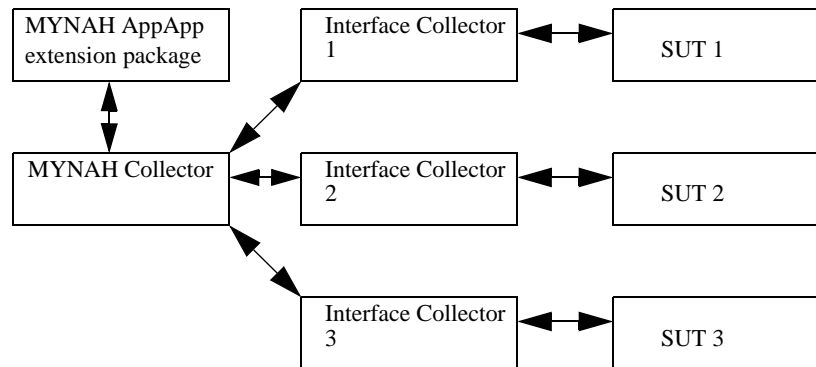

**Figure 11-1.** MYNAH General AppApp Interactions

The MYNAH Collector is a common MYNAH process used to manage a group of Interface Collectors. The MYNAH Collector can also manage other protocol handlers. These collectors are configured in the MYNAH configuration file, *xmyConfig*.

The MYNAH System supplies only a generic Interface Collector template. The application specific logic should be developed using the template.

**NOTE** — To access the General AppApp extension package, you must first run **xmyLoad AppApp**.

The General AppApp extension package provides functionality to do the following:

- Make one or more logical connections to the SUT
- Send ASCII messages or files to the SUT
- Send binary files to SUT

- Wait for and receive ASCII messages from the SUT, saving them as files in an area called the Message Response Directory
- Receive binary message file from the SUT
- Filter unwanted incoming messages using user defined match procedures
- Open and scan all received files saved in the Message Response Directory. See the section on the Message Response Directory Tcl Language Extensions (Section 15.1).

Before using the General AppApp extension package, the MYNAH Collector and Interface Collector processes must be configured and running. Please refer to the *MYNAH System Administration Guide* for more information.

### 11.1.1 Methods Overview

Section 11.2.1 contains detailed descriptions of the AppApp Method extensions. The extensions are listed in alphabetical order (within each category). Table 11-1 lists the extensions, organizing them in general functional categories. Table 11-1 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 11-1. AppApp Method Extensions**

Category	Method	Description	Section
<b>Connection</b>	<b>connect</b>	Establishes a logical connection to the MYNAH Collector and AppApp processes from the MYNAH Tcl script.	11.2.1.1, Page 11-5
	<b>delete</b>	Deletes a specified message or all messages for a connection	11.2.1.2, Page 11-7
	<b>disconnect</b>	Destroys a connection made through the <b>connect</b> method.	11.2.1.3, Page 11-8
<b>Data Entry/Retrieval</b>	<b>send</b>	Sends a message to the SUT using the AppApp connection established with the <b>connect</b> method.	11.2.1.5, Page 11-11
	<b>receive</b>	Returns a message from the SUT using the AppApp connection established using the <b>connect</b> method.	11.2.1.4, Page 11-9



## 11.1.2 Attributes Overview

Section 11.2.2 contains detailed descriptions of the AppApp Attribute extensions. The extensions are listed in alphabetical order (within each category). Table 11-2 lists the extensions, organizing them in general functional categories. Table 11-2 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 11-2.** AppApp Attribute Extensions (Sheet 1 of 2)

Category	Attribute	Description	Section
<b>Connection</b>	<b>-connections</b>	Lists the names of all active connections.	11.2.2.3, Page 11-16
	<b>-connId</b>	Returns a unique identifier associated with the given connection	11.2.2.4, Page 11-17
	<b>-IFhost</b>	Returns the host on which the application specific Interface Collector is running.	11.2.2.7, Page 11-20
	<b>-name</b>	Lets you choose the name of the connection.	11.2.2.11, Page 11-26
<b>Data Entry/Retrieval</b>	<b>-append</b>	Instructs the <b>receive</b> operation to append a specified number of successfully received messages.	11.2.2.1, Page 11-13
	<b>-data</b>	Gets the message associated with the last <b>receive</b> method.	11.2.2.5, Page 11-18
	<b>-file</b>	Gets the name of the file containing the message associated with the last <b>receive</b> method.	11.2.2.6, Page 11-19
	<b>-maxMsgs</b>	Specifies the maximum number of messages that can be appended together by the <b>xmyMsgMatchUntil</b> procedure.	11.2.2.10, Page 11-25
<b>Comparisons</b>	<b>-listen</b>	Returns or sets the listen mode used when receiving messages.	11.2.2.8, Page 11-21
	<b>-match</b>	Specifies a Tcl procedure name that will be invoked for each incoming message processed by the <b>receive</b> method.	11.2.2.9, Page 11-23

Table 11-2. AppApp Attribute Extensions (Sheet 2 of 2)

Category	Attribute	Description	Section
Waiting	<b>-broadcast</b>	Permits all the waiting scripts to receive any messages received	<a href="#">11.2.2.2, Page 11-15</a>
	<b>-timeout</b>	Sets the timeout for the <b>send</b> and <b>receive</b> operations.	<a href="#">11.2.2.18, Page 11-33</a>
Attribute	<b>-recvPort</b>	Returns the port number.	<a href="#">11.2.2.12, Page 11-27</a>
	<b>-recvStatus</b>	Returns the state of the receive session.	<a href="#">11.2.2.13, Page 11-28</a>
	<b>-recvTime</b>	Returns the time stamp for the received message.	<a href="#">11.2.2.14, Page 11-29</a>
	<b>-sendPort</b>	Returns the port number.	<a href="#">11.2.2.15, Page 11-30</a>
	<b>-sendStatus</b>	Returns the state of the send session.	<a href="#">11.2.2.16, Page 11-31</a>
	<b>-sendTime</b>	Returns the time the last message was successfully sent.	<a href="#">11.2.2.17, Page 11-32</a>

## 11.2 xmyAppApp class

**xmyAppApp** is the Tcl class command providing language extensions that are necessary for automated interactions with the SUT using the General AppApp interface.

### 11.2.1 Methods

The AppApp package contains the following methods.

#### 11.2.1.1 connect

##### Syntax

```
xmyAppApp connect -appName name ?-broadcast? \  
    ?-listen listenOption? ?-match matchProc? \  
    ?-maxMsgs maxMsgs? ?-name name? \  
    ?-timeout timeout?
```

##### Returns

A handle name to the created **xmyAppApp** class instance.

##### Description

The **connect** method establishes a logical connection to the MYNAH collector and the local Interface Collector processes from the MYNAH Tcl script. Upon success, a handle to a connection is returned to the script. The attribute list provides the instance of **xmyAppApp** class with initial values that will impact the configuration of this connection. Attribute values not supplied with the connect method will obtain their values from the **xmyAppApp** command. If the value is undefined in the **xmyAppApp** class command or defined as the empty string, the corresponding value from the configuration file will be used.

**connect** takes the following attributes. These attributes are described in detail in subsequent sections.

<b>-appName</b> <i>name</i>	The name of the application, as defined in the <i>xmyConfig</i> configuration file. See the <i>MYNAH System Administration Guide</i> for details on the <i>xmyConfig</i> file.
<b>-broadcast</b>	Each received message is sent to all the waiting scripts, belonging to the same application.
<b>-listen</b> <i>listenOption</i>	Listen option for the <b>receive</b> method.
<b>-match</b> <i>matchProc</i>	The name of the Tcl procedure to be used for matching.
<b>-maxMsgs</b> <i>maxMsgs</i>	Maximum number of messages that can be appended.

- |                                |  |
|--------------------------------|--|
| <b>-name</b> <i>name</i>       | Name of the application which the given Interface Collector is managing. |
| <b>-timeout</b> <i>timeout</i> | The time in seconds before script times out on receiving messages.       |

### Example

```
> set A2A_conn1 [xmyAppApp connect -appName app_1]
```

### Exceptions

Unable to establish the connection because

- **xmyCollector** process is not running or cannot be contacted
- Interface Collector process is not running or cannot be contacted
- **appName** is not defined in the *xmyConfig* file
- **appName** is not known to the **xmyCollector** process
- **appName** is not defined to use the AppApp protocol
- Timeout waiting for the connection back from the **xmyCollector** process

### 11.2.1.2 delete

#### Syntax

```
handle delete -file fileName
handle delete -file [handle -file]
handle delete -all
```

#### Returns

No result

#### Description

The **delete** method deletes the specified message or all messages for the connection identified by the **handle**.

**delete** takes the following attribute:

- file *fileName*** Deletes the message specified by *fileName*, which can be obtained by using the **-file** option on the **receive** method
- all** Deletes all messages for a connection. The **-all** option is usually used before disconnecting the connection.

#### Example

```
> $A2A_conn1 delete -filename 854028294.63.2
> $A2A_conn1 delete -all
```

### 11.2.1.3 disconnect

#### Syntax

```
handle disconnect
```

#### Returns

No result

#### Description

The **disconnect** method destroys the logical connection to the given Application made with the **xmyAppApp** connect class method and identified by the handle. Once the disconnect call is made, the handle name associated with the connection is no longer valid and will produce a Tcl “Invalid command name” error message if used.

#### Example

```
> $A2A_conn1 disconnect
```

#### 11.2.1.4 receive

##### Syntax

```
handle receive ?-data? ?-file? ?-append? \  
?-listen listenOption? ?-timeout timeout?
```

##### Returns

The received message if the **-data** attribute is specified, the filename containing the received message if the **-file** attribute was specified, otherwise no result.

##### Description

The receive method receives a message from the SUT using the AppApp connection established with the **connect** method and identified by *handle*. All messages received from the given Application from the Interface Collector will be saved in the Message Response Directory. Depending on the listen mode (see **-listen**), the receive operation will look for messages present in the Message Response Directory and/or wait for a message to arrive.

If a Tcl match procedure is defined (see **-match**), only messages that satisfy the match procedure will be returned by the receive operation.

##### Attributes

The attributes are described in detail in subsequent sections.

##### Example

In this example, the script waits a maximum of 300 seconds to receive a message.

```
> set message [[$A2A_conn1 receive -data -timeout 300]
```

##### Side Effects

If the receive method was successful, the internal receive time (see **-recvTime**) and receive message variables (**-data** or **-file**) will be updated.

##### Exceptions

Unable to receive a message because:

- Timeout occurred while waiting for a message to arrive
- Invalid user defined Tcl match procedure
- No messages have been received, but the **-append** attribute was specified
- No messages have been received, but the MSG\_LISTEN\_NEXT mode was specified
- Unable to save received message to disk.

**NOTE** — The Message Response Directory must be writeable by the local Interface Collector processes. It is recommended that the person starting Interface Collector own both the Message Response Directory and the Interface Collector processes.

- Invalid or missing attribute values
- Both the **-data** and **-file** attributes were specified



### 11.2.1.5 send

#### Syntax

```
handle send -data message -userData data
handle send -file filename -userData data
```

#### Returns

No result

#### Description

The **send** method sends a message to the SUT using the AppApp connection established with the **connect** method and identified by *handle*. The message is sent to the Interface Collector associated with the connection.

The message to be sent can be defined within the Tcl script or in a file. In the first case, the **-data** attribute must be used and the message is provided as the attribute value.

**NOTE** — This message is treated like a string. If it contains backslash ('\') or other special characters they must be escaped with a backslash ('\').

In the second case, the **-file** option is used to specify the full path to a file containing the message.

**NOTE** — Since this file name is passed to the Interface Collector for transmitting, the Interface processes must be able to open and read this file. When the Tcl script and Interface Collector are running on different machines, the file system containing the file to be sent must be accessible (mounted) by both the machines.

UserData can be used to send Application SUT specific information to the Interface Collector, which cannot be put in the message itself. For example, it could be priority of the message to be sent to Application SUT. The Interface Collector should interpret this information and act accordingly.

#### Example

In this example you send the string `*sect{a=0;b=1;}%` to the handle `$A2A_conn1`

```
> $A2A_conn1 send -data "*sect{a=0;b=1;}%"
```

In this example you send the string `*tag=\1\2\3%`

```
> $A2A_conn1 send -data "*tag=\1\2\3%"
```

In this example you send the file */mynah/scripts/AppApp/app\_1.send.01*

```
> $A2A_conn1 send -file "/mynah/scripts/AppApp/app_1.send.01"
```

### Side Effects

If the **send** method was successful, the internal send time variable (see **-sendTime**) will be updated.

### Exceptions

Unable to send the message because

- Application send session is down. See **-sendStatus** attribute
- File is not accessible (if **-file** attribute was specified)
- Data message is too long, i.e., more than 2400 characters (if **-data** attribute was specified).

## 11.2.2 Attributes

The AppApp package contains the following attributes.

### 11.2.2.1 -append

#### Syntax

```
handle receive -append number
```

#### Returns

No result

#### Description

The **-append** attribute instructs the **receive** operation to append the next *number* of successfully received messages to the current received message before returning. The entire message will be accessible as the last received message.

The **-append** attribute is on a per receive basis and can only be specified with the **receive** method.

#### Example

This gets the first piece of a message sent in multiple pieces.

```
> $A2A_conn1 receive
```

Assume the first piece contains a number of subsequent pieces

```
regexp {(FRAGNUM=)([0-9]+)} [$A2A_conn1 -data] a b num
```

Receive and append the next pieces together with first piece

```
> $A2A_conn1 receive -append $num -listen MSG_LISTEN_NEXT
```

This is the entire message made of 1 + \$num pieces

```
> set myMsg [$A2A_conn1 -data]
```

### Example

This gets the first piece of a message sent in multiple pieces. Assume that the last piece contains the keyword LAST

```
> $A2A_conn1 receive
```

Receive and append the next pieces until the message contains the LAST keyword.

```
> while {[regexp {LAST} [$A2A_conn1 -data]] == 0} {  
    $A2A_conn1 receive -append 1 -listen MSG_LISTEN_NEXT  
}
```

This is the entire message.

```
> set myMsg [$A2A_conn1 -data]
```

### Exceptions

Invalid **-append** attribute value.

### 11.2.2.2 -broadcast

#### Syntax

```
xmyAppApp connect -broadcast  
handle -broadcast
```

#### Returns

The boolean value associated with the broadcast option.

#### Description

The **broadcast** option permits all the waiting scripts to receive any messages received by the Interface Collector, since the connection is made. This attribute can be set in the **connection** command only.

The received message may or may not be for the given connection. It is up to the script to filter out the message it receives.

#### Example

```
> $A2A_connl -broadcast
```

#### Exceptions

None

### 11.2.2.3 -connections

#### Syntax

```
xmyAppApp -connections
```

#### Returns

A blank separated list of active connection handle names (e.g., **.xmyAppApp\_1**, **.xmyAppApp\_2**, and **.xmyAppApp\_4**), or the empty string if there are no active connections.

#### Description

The **-connections** attribute lists the names (**handle**) of all active (open) connections to AppApp. **-connections** can only be used through the **xmyAppApp** class command.

#### Example

```
> xmyAppApp -connections  
.xmyAppApp_1 .xmyAppApp_2 .xmyAppApp_4
```

#### 11.2.2.4 -connId

##### Syntax

```
handle -connId
```

##### Returns

The connection id associated with the given handle.

##### Description

The **-connId** attribute returns the connection id, which is a unique identifier associated with the given connection. It is uniquely generated and maintained by the MYNAH collector process.

##### Example

```
> $A2A_conn1 -connId
```

##### Exceptions

None

### 11.2.2.5 -data

#### Syntax

```
handle -data  
handle receive -data
```

#### Returns

The message associated with the most recent receive operation, or the empty string if no messages has been received yet.

#### Description

The **-data** attribute is used to get the message associated with the last **receive** method. If **-data** is used with the **receive** method, the received data will be returned. If the **receive** method fails, an exception will occur and the previously received message will remain unchanged.

#### Example

This checks if string "ORD=56700;" is in last received message.

```
> set msg [$A2A_conn1 -data]  
> regexp {ORD=56700;} $msg
```



### 11.2.2.6 -file

#### Syntax

```
handle -file  
handle receive -file
```

#### Returns

The filename containing the message associated with the most recent **receive** operation, or the empty string if no messages has been received yet.

#### Description

The **-file** attribute retrieves the name of the file, stored in the Message Response Directory, containing the most recent received message. The filename should be saved in the Tcl script in order to access this data if additional messages will be received. Since the Message Response Directory is purged on a regular basis, the contents of this file should be copied to a user area if the message need to be saved on a long term.

If **-file** is used with the **receive** method, the received filename will be returned. If the **receive** method fails, an exception will occur and the previously received filename will remain unchanged.

#### Example

Read the file containing the last received message.

```
> set fd [open [A2A_conn1 -file] r]  
> set data [read $fd]  
> close $fd
```

### 11.2.2.7 -IFhost

#### Syntax

```
handle -IFhost
```

#### Returns

The host on which the application specific Interface Collector is running.

#### Description

The application specific Interface Collector runs on a specific host. The host name is defined in the *xmyConfig* file as "Host". See the *MYNAH System Administration Guide* for details on the *xmyConfig* file.

#### Example

```
> $A2A_conn1 -IFhost
```

#### Exceptions

None

### 11.2.2.8 -listen

#### Syntax

```
xmyAppApp -listen ?listenMode?  
xmyAppApp connect -listen listenMode  
handle -listen ?listenMode?  
handle receive -listen listenMode
```

#### Returns

When no value is specified it returns the current listen mode, otherwise no result.

#### Description

The **-listen** attribute returns or sets the listen mode, which determines what messages will be considered by the **receive** method.

When no *listenMode* value is specified, **-listen** returns the current listen mode.

Only messages that have arrived **after** the listen time stamp will be considered by the **receive** operation. The valid **-listen** values are:

- **MSG\_LISTEN\_NOW** will set the listen time stamp to the current time. Thus, **receive** will return messages that have arrived after the time the **receive** operation was executed. All messages arrived prior to the receive operation will be ignored (but not removed from the Message Response Directory).
- **MSG\_LISTEN\_NEXT** will instruct **receive** to return the next message that arrived after the current received message. The listen time stamp will not be set. This mode is very useful for retrieving messages in sequence or messages that have arrived within the same second.
- **MSG\_LISTEN\_SEND** will set the listen time stamp to the time the most recent **send** operation was successfully executed. From a client point of view, we can assume that a reply (received message) to a request (sent message) cannot be received before the request itself is sent. On the other hand, if you are emulating the server side, then the receive must be performed first, so the **MSG\_LISTEN\_NOW** value should be used.
- An integer **time value** in UNIX format (i.e. seconds from 1/1/1970). The listen time stamp will be set to this given time, and messages that have arrived after this time will be considered.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is **MSG\_LISTEN\_NOW**.

**-listen** can be set in the *xmyConfig* file using the **ListenMode** parameter.

### Example

Send a request and wait up to 30 seconds for the reply.

```
> $A2A_conn1 send -data $request_1
> set reply_1 [ $A2A_conn1 receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

Send the second request.

```
> $A2A_conn1 send -data $request_2
> set reply_2 [$A2A_conn1 receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

### Example

In this example, three **sends** are done before performing any receives, so that a certain degree of parallelism is achieved between the client and server. The **MSG\_LISTEN\_SEND** wouldn't work properly because the first and second replies will be lost if they arrive before the third **send** operation is performed. The **MSG\_LISTEN\_NOW** will also not work if the replies arrive before the receive operation is executed.

Send three different requests expecting three replies.

```
> $A2A_conn1 send -data $request_1
> set saveTime [$A2A_conn1 -sendTime] # save 1st send time
> $A2A_conn1 send -data $request_2
> $A2A_conn1 send -data $request_3
```

Get the replies.

```
> set reply_1 [$A2A_conn1 receive -data -listen $saveTime]
> set reply_2 [$A2A_conn1 receive -data \
-listen MSG_LISTEN_NEXT]
> set reply_3 [$A2A_conn1 receive -data \
-listen MSG_LISTEN_NEXT]
```

### Exceptions

Invalid listen mode was specified

### 11.2.2.9 -match

#### Syntax

```
xmyAppApp -match ?matchTclProc?  
xmyAppApp connect -match matchTclProc  
handle -match
```

#### Returns

When no value is specified it returns the name of the Tcl procedure used by the receive operation to match (filter) all incoming messages, otherwise no result.

#### Description

The **-match** attribute specifies a Tcl procedure name that will be invoked for each incoming message processed by the **receive** method. Messages that do not satisfy the Tcl **match** procedure will not be returned by the receive operation. By default a **match** procedure is not defined and all messages can be returned by the **receive** method.

**-match** is set on a per connection basis and is set through the **xmyAppApp** class or by the **connect** method.

The user defined Tcl **match** procedure must take the connection handle name as its only argument and it returns a “1” when there is a match and “0” otherwise. Given the handle name, this match procedure can access the received data by using the **-data** attribute. Since this user defined match procedure is invoked for each message processed by the receive operation, it must be developed with performance considerations.

The existence and validity of the user defined Tcl match procedure will not be checked until the **receive** operation is executed.

**NOTE** — Even though Tcl supports defining procedures named “(”, “#”, and other punctuation and special symbols, you should *not* define your Tcl **match** procedures with these names. Instead, meaningful procedure names should always be used.

**-match** can be set in the *xmyConfig* file using the **MatchProcedure** parameter.

### Example

Receive only those messages containing “host=bluejays”.

```
> proc matchTclProc { $A2A_conn1 } {  
    return [regexp {host=bluejays} [$A2A_conn1 -data]]  
}  
set conn1 [xmyAppApp connect -match matchTclProc ... ]
```

### Exceptions

An attempt is made to change the match procedure using the instance handle

### 11.2.2.10 -maxMsgs

#### Syntax

```
xmyAppApp -maxMsgs ?number?  
xmyAppApp connect -maxMsgs number  
handle -maxMsgs ?number?
```

#### Returns

When no value is specified it returns the current message limit, otherwise no result.

#### Description

The **-maxMsgs** attribute specifies the maximum number of messages that can be appended together by the **xmyMsgMatchUntil** procedure. This parameter limits the number of messages appended before the until match conditions are satisfied.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is 10.

**-maxMsgs** can be set in the *xmyConfig* file using the **MaxMsgs** parameter.

#### Exceptions

An invalid **maxMsgs** value is specified

#### Example

```
> $A2A_conn1 -maxMsgs 25
```

### 11.2.2.11 -name

#### Syntax

```
xmyAppApp connect -name connectionName  
handle -name
```

#### Returns

When no value is specified it returns the connection handle name set by the **connect** operation.

#### Description

The **-name** attribute lets you choose the name of the connection rather than having a name internally generated by the **connect** method.

The **-name** attribute is on a per connection basis and the value is set through the **connect** method.

#### Example

Create a connection named “my\_connection”.

```
> xmyAppApp connect -name my_connection ...
```

#### Exceptions

- A connection with the same name already exists
- An attempt is made to change the connection name using the instance handle



#### 11.2.2.12 -recvPort

##### **Syntax**

```
handle -recvPort
```

##### **Returns**

The port on which the application specific Interface Collector is communicating with the MYNAH collector process.

##### **Description**

The port on which the application specific Interface Collector is communicating with the MYNAH collector process. It is defined in the *xmyConfig* file as ***TcpPort***. See the *MYNAH System Administration Guide* for details on *xmyConfig* file.

The same port is used for both sending and receiving.

##### **Example**

```
> $A2A_conn1 -recvPort
```

##### **Exceptions**

None

### 11.2.2.13 -recvStatus

#### Syntax

```
handle -recvStatus
```

#### Returns

The value “UP” if the AppApp receive session is in TSOPEN state, otherwise returns “DOWN”.

#### Description

The **-recvStatus** attribute checks the state of the receive session between MYNAH and the SUT AppApp managers. “UP” is returned only if MYNAH’s AppApp manager is able to receive message from the SUT’s AppApp manager. Even though the receive status is “DOWN”, a **receive** may still be successful if the messages have already arrived and are stored in the Message Response Directory.

**NOTE** — Defining and establishing (opening) the AppApp sessions are performed outside of the MYNAH System using AppApp commands.

#### Example

```
> $A2A_conn1 -recvStatus
```

#### 11.2.2.14 -recvTime

##### **Syntax**

```
handle -recvTime
```

##### **Returns**

The time stamp in UNIX format (i.e., seconds since 1/1/1970) associated with the most recent received message, or 0 if no messages have been received.

##### **Description**

The **-recvTime** attribute returns the time stamp for the received message. All messages received from the SUT are stamped with the time the message was received by the MYNAH **collector** process.

##### **Example**

```
> $A2A_conn1 receive  
> set rtime [$A2A_conn1 -recvTime]
```

### 11.2.2.15 -sendPort

#### Syntax

```
handle -sendPort
```

#### Returns

The port on which the application specific Interface Collector is communicating with the MYNAH collector process.

#### Description

The port on which the application specific Interface Collector is communicating with the MYNAH collector process. It is defined in the *xmyConfig* file as “TcpPort”.

The same port is used for both sending and receiving.

#### Example

```
> $A2A_conn1 -sendPort
```

#### Exceptions

None

#### 11.2.2.16 -sendStatus

##### Syntax

```
handle -sendStatus
```

##### Returns

The value “UP” if the AppApp send session is in TSOPEN state, otherwise returns “DOWN”.

##### Description

The **-sendStatus** attribute returns the state of the send session between MYNAH and SUT AppApp managers. “UP” is returned only if the MYNAH System’s AppApp manager is able to **send** message to the SUT’s AppApp manager. If the **send** status is not “UP”, the **send** operation will fail.

**NOTE** — Defining and establishing (opening) the AppApp sessions are performed outside of the MYNAH System using AppApp commands.

##### Example

```
> $A2A_conn1 -sendStatus
```

### 11.2.2.17 -sendTime

#### Syntax

```
handle -sendTime
```

#### Returns

The time stamp in UNIX format (i.e. seconds since 1/1/1970) associated to the most recent sent message, or 0 if no messages have been sent.

#### Description

The **-sendTime** attribute returns the time the last message was successfully sent over the connection.

#### Example

```
> $A2A_conn11 -sendTime
```

### 11.2.2.18 -timeout

#### Syntax

```
xmyAppApp -timeout ?timeoutValue?  
xmyAppApp connect -timeout timeoutValue  
handle -timeout ?timeoutValue?  
handle send -timeout timeoutValue  
handle receive -timeout timeoutValue
```

#### Returns

When no value is specified it returns the current timeout value, otherwise no result.

#### Description

The **-timeout** attribute sets the timeout for the **send** and **receive** operations. For the **send** operation, the timeout is the number of seconds to wait for acknowledgment of the sent message. If the timeout expires, the **send** operation will fail. For the **receive** operation, the timeout is the number of seconds to wait for a message to arrive. If the timeout expires, the receive operation will fail.

If a timeout value was not specified at connect time, the value in the configuration file for the particular protocol handler will be used. The timeout value can be changed for the connection instance, or changed for each individual send or receive operation.

**-timeout** can be set in the *xmyConfig* file using the **Timeout** parameter.

#### Example

Create a connection setting the timeout to five minutes.

```
> set A2A_conn1 [xmyAppApp connect -timeout 300 ]
```

The following **receive** waits at most five minutes

```
> $A2A_conn1 receive
```

The following **receive** waits at most ten minutes

```
> $A2A_conn1 -timeout 600  
> $A2A_conn1 receive
```

The following **receive** waits at most one minute

```
> $A2A_conn1 receive -timeout 60
```

The following **receive** waits at most ten minutes

```
> $A2A_conn1 receive
```

### 11.3 Example

```
# This script sends and receives messages to and from I/F
# collector.
xmyLoadPkg AppApp
xmyAppApp connect -appName app_1 -name a1 -timeout 10

set c1 [a1 -connId]
set listenValue MSG_LISTEN_SEND
set i 1

while {$i <= 500} {
# Send a message and receive. Since the test I/F collector
# is a loopback, the received message will be the same as the
# sent one.
    set msg "test message number $i to the I/F Collector"
    a1 send -data "$msg" -userData "Msg # $i"
    a1 receive -data -listen $listenValue
# Delete the first 100 messages.
    if {$i <= 100} {
        a1 delete -file [a1 -file]
    }

    incr i
    set listenValue MSG_LISTEN_NEXT
}
# Delete the rest of the messages for the connection.
a1 delete -all

a1 disconnect
```




## 12. TOP Tcl Language Extension

The MYNAH TOP extension package provides functionality necessary for interactions with the SUT using the TOP/X.25 or TOP/TCP/IP protocols.

### 12.1 Overview

The TOP extension package interfaces with the data communications system called TOPCOM that handles the Transaction Oriented Protocols (TOP), as shown in [Figure 12-1](#).

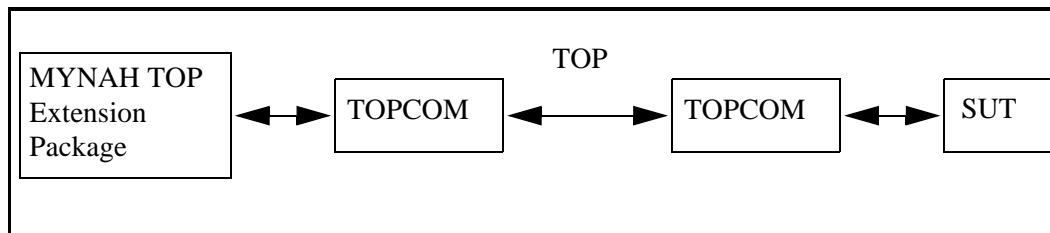

**Figure 12-1.** MYNAH TOPCOM Interactions

Users concerned with testing applications using TOP as the communications protocol may use the MYHAH TOP Tcl extension package and Tcl language to develop test scripts. The Tcl test scripts can be written to emulate an external application communicating with the application in the SUT.

**NOTE** — To access the TOP Extension Package you must first run **xmyLoadPkg TOP**.

The TOP extension package provides functionality to

- Make one or more logical connections to the SUT over an established TOP session
- Send ASCII messages or files to the SUT
- Wait for and receive ASCII messages from the SUT, saving them as files in an area called the Message Response Directory
- Disconnect from a TOP session
- Filter unwanted incoming messages using user defined match procedures
- Perform TCIS or TCIS2 conversions on sent and received messages
- Analyze unformatted messages or messages in the Flexible Computer Interface Format (FCIF). See The section on the FCIF Tcl Language Extensions section.
- Open and scan all received files saved in the Message Response Directory. See the section on the Message Response Directory Tcl Language Extensions (Section [15.1](#)).

Before using the TOP extension package, the TOPCOM and MYNAH Collector processes must be configured and running. Please refer to the *TOPCOM Guide for Administrators, Operators, & User* and the *MYNAH System Administration Guide* for more information.

The TOP Extension Package contains a process called a **Collector**, which stores all incoming messages into a special area (the **Message Response Directory**) on disk. The Collector is the interface between the MYNAH System and TOPCOM, sending and receiving messages from TOPCOM or any other protocol handler. A **handler** is the logical name of a TOPCOM entry defined in the *xmyConfig* file. All SEs performing a receive operation access the disk in order to get the message they are interested in. Whether or not you are concerned with checking received messages, the collector must be running.

The following is a list and description of the commands in the MYNAH TOP Extension Package.

### 12.1.1 Methods Overview

Section 12.2.1 contains detailed descriptions of the TOP Method extensions. The extensions are listed in alphabetical order (within each category). Table 12-1 lists the extensions, organizing them in general functional categories. Table 12-1 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 12-1.** TOP Method Extensions

Category	Method	Description	Section
<b>Connection</b>	<b>connect</b>	Establishes a logical connection to the MYNAH Collector and TOPCOM processes from the MYNAH Tcl script.	<a href="#">12.2.1.1,</a> <a href="#">Page 12-5</a>
	<b>disconnect</b>	Destroys a connection made through the <b>connect</b> method.	<a href="#">12.2.1.2,</a> <a href="#">Page 12-7</a>
<b>Data Entry/Retrieval</b>	<b>send</b>	Sends a message to the SUT using the TOPCOM connection established with the <b>connect</b> method.	<a href="#">12.2.1.4,</a> <a href="#">Page 12-10</a>
	<b>receive</b>	Returns a message from the SUT using the TOPCOM connection established using the <b>connect</b> method.	<a href="#">12.2.1.3,</a> <a href="#">Page 12-8</a>

## 12.1.2 Attributes Overview

Section 12.2.2 contains detailed descriptions of the TOP Attribute extensions. The extensions are listed in alphabetical order (within each category). Table 12-2 lists the extensions, organizing them in general functional categories. Table 12-2 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 12-2.** TOP Attribute Extensions (Sheet 1 of 2)

Category	Attribute	Description	Section
<b>Connection</b>	<b>-connections</b>	Lists the names of all active connections.	12.2.2.2, Page 12–14
	<b>-dtn</b>	Sets the TOPCOM Destination Transaction Name (DTN) parameter.	12.2.2.5, Page 12–17
	<b>-name</b>	Lets you choose the name of the connection.	12.2.2.11, Page 12–25
	<b>-psn</b>	Sets the TOPCOM Presentation Services Name (PSN) parameter.	12.2.2.12, Page 12–26
	<b>-topcom</b>	Specifies what TOPCOM handler to connect to.	12.2.2.20, Page 12–34
<b>Data Entry/Retrieval</b>	<b>-append</b>	Instructs the <b>receive</b> operation to append a specified number of successfully received messages.	12.2.2.1, Page 12–12
	<b>-conversion</b>	Tells the <b>send/receive</b> operation how to manipulate an application message.	12.2.2.3, Page 12–15
	<b>-data</b>	Gets the message associated with the last <b>receive</b> method.	12.2.2.4, Page 12–16
	<b>-file</b>	Gets the name of the file containing the message associated with the last <b>receive</b> method.	12.2.2.6, Page 12–18
	<b>-maxMsgs</b>	Specifies the maximum number of messages that can be appended together by the <b>xmyMsgMatchUntil</b> procedure.	12.2.2.9, Page 12–23
	<b>-maxSegmentLen</b>	Defines the maximum value of the two byte prefixes that is inserted at the beginning of each message segment during TCIS conversion.	12.2.2.10, Page 12–24

**Table 12-2.** TOP Attribute Extensions (Sheet 2 of 2)

Category	Attribute	Description	Section
<b>Comparisons</b>	<b>-listen</b>	Returns or sets the listen mode used when receiving messages.	<a href="#">12.2.2.7,</a> <a href="#">Page 12–19</a>
	<b>-match</b>	Specifies a Tcl procedure name that will be invoked for each incoming message processed by the <b>receive</b> method.	<a href="#">12.2.2.8,</a> <a href="#">Page 12–21</a>
<b>Waiting</b>	<b>-timeout</b>	Sets the timeout for the <b>send</b> and <b>receive</b> operations.	<a href="#">12.2.2.19,</a> <a href="#">Page 12–33</a>
<b>Attribute</b>	<b>-recvSession</b>	Returns the receive session number.	<a href="#">12.2.2.13,</a> <a href="#">Page 12–27</a>
	<b>-recvStatus</b>	Returns the state of the receive session.	<a href="#">12.2.2.14,</a> <a href="#">Page 12–28</a>
	<b>-recvTime</b>	Returns the time stamp for the received message.	<a href="#">12.2.2.15,</a> <a href="#">Page 12–29</a>
	<b>-sendSession</b>	Returns the send session number.	<a href="#">12.2.2.16,</a> <a href="#">Page 12–30</a>
	<b>-sendStatus</b>	Returns the state of the send session.	<a href="#">12.2.2.17,</a> <a href="#">Page 12–31</a>
	<b>-sendTime</b>	Returns the time the last message was successfully sent.	<a href="#">12.2.2.18,</a> <a href="#">Page 12–32</a>

## 12.2 xmyTop class

**xmyTop** is the Tcl class command providing language extensions that are necessary for automated interactions with the SUT using the TOP application-to-application interface.

### 12.2.1 Methods

The TOP package contains the following methods.

#### 12.2.1.1 connect

##### Syntax

```
xmyTop connect -topcom "name" ?attribute list?
```

##### Returns

A handle name to the created **xmyTop** class instance.

##### Description

The **connect** method establishes a logical connection to the MYNAH Collector and the local TOPCOM processes from the MYNAH Tcl script.

**NOTE** — Only 24 **xmyTop** connections can be open at a given time from a single script execution, including all connections in a parent script and any child scripts. If a script opens more than 24 scripts at one time, scripts from a standalone engine will hang and scripts running from a background engine will fail.

Upon success, a handle to a connection is returned to the script. The attribute list provides the **xmyTop** instance with initial values that will impact the configuration of this connection only. Attribute values not supplied with the **connect** method will obtain their values from the **xmyTop** class command. If the value is undefined in the **xmyTop** class command or defined as the empty string, the configuration file value will be used. All attribute values of **xmyTop** are configurable and can be changed by the user at connect time.

**NOTE** — The *name* input to the **-topcom** attribute must match with a TOP protocol handler name defined in the *xmyConfig* file. (See the *MYNAH System Administration Guide* for information on the *xmyConfig* file.)

## Attributes

The **-topcom** attribute is required with **connect**.

On a per connection basis, the following attributes can only be set in the **xmyTop** class or by the connect method: **-conversion**, **-match**, **-maxSegmentLen**, **-name**, **-topcom**. In other words, the values of these attributes can not be changed using an instance handle.

This is the complete list of connection class attributes that can be specified:

**-conversion**, **-dtn**, **-listen**, **-match**, **-maxMsgs**, **-maxSegmentLen**, **-name**, **-psn**, **-timeout**, and **-topcom**.

## Example

This example creates a connection to the TOPCOM handler **handler\_1**.

```
> set TOP_conn [xmyTop connect -topcom "handler_1"]
```

In this example you try to connect to a TOPCOM handler that does not exist.

```
> set TOP_conn [xmyTop connect -topcom "foo"]  
error: xmyTop connect: Protocol Handler (foo) not found in  
configuration file
```

## Exceptions

- Unable to establish the connection because
  - **xmyCollector** process is not running or can not be contacted
  - TOP handler name does not exist in configuration file
  - TOP handler name is not known to the **xmyCollector** process
  - TOP handler name is not defined to use the TOP protocol
  - Timeout waiting for the connection back from the **xmyCollector** process.
- Invalid or missing attribute values

### 12.2.1.2 disconnect

#### Syntax

```
handle disconnect
```

#### Returns

No result

#### Description

The **disconnect** method destroys the logical connection to TOPCOM made with the **xmyTop connect** class method and identified by **handle**. Once the disconnect call has been made, the handle name associated with the connection is no longer valid and will produce a Tcl “Invalid command name” error message if used.

#### Example

```
> $TOP_conn disconnect
```

### 12.2.1.3 receive

#### Syntax

```
handle receive ?-data? ?-file? ?attribute list?
```

#### Returns

The received message if the **-data** attribute is specified, the filename containing the received message if the **-file** attribute is specified, otherwise no result.

#### Description

The **receive** method receives a message from the SUT using the TOPCOM connection established with the **connect** method and identified by **handle**. All messages received from TOPCOM (over the receive session number specified in the configuration file) will be saved in the Message Response Directory. Depending on the listen mode (see **-listen**), the receive operation will look for messages present in the Message Response Directory and/or wait for a message to arrive.

If a Tcl **match** procedure is defined (see **-match**), only messages that satisfy the **match** procedure will be returned by the **receive** operation.

#### Attributes

This is the complete list of **receive** attributes that can be specified: **-append**, **-data**, **-file**, **-listen**, **-timeout**. The values of these attributes will only impact the particular **receive** operation.

#### Example

In this example you wait a maximum of 300 seconds to receive a message.

```
> set message [$TOP_conn receive -data -timeout 300]
```

#### Side Effects

If the **receive** method was successful, the internal receive time (see **-recvTime**) and receive message variables (see **-data** or **-file**) will be updated.

#### Exceptions

- Unable to receive a message because
  - timeout occurred while waiting for a message to arrive
  - invalid user defined Tcl match procedure
- No messages have been received, but the **-append** attribute was specified
- No messages have been received, but the **MSG\_LISTEN\_NEXT** mode was specified
- Unable to save received message to disk



**NOTE** — The Message Response Directory must be writable by the local TOPCOM processes. It is recommended that the person starting TOPCOM own both the Message Response Directory and the TOPCOM processes.

- Invalid or missing attribute values
- Both the **-data** and **-file** attributes were specified

#### 12.2.1.4 send

##### Syntax

```
handle send -data message ?attribute list?  
handle send -file filename ?attribute list?
```

##### Returns

No result

##### Description

The **send** method sends a message to the SUT using the TOPCOM connection established with the **connect** method and identified by **handle**. The message is sent to the TOPCOM processes using the **send** session number defined in the configuration file.

The message to be sent can be defined within the Tcl script or in a file.

- In the first case, the **-data** attribute must be used and the message is provided as the attribute value.

**NOTE** — This message is treated like a string. If it contains backslash ('\') or other special characters it must be escaped with a backslash ('\').

**NOTE** — The message size cannot exceed 2400 bytes.

- In the second case, the **-file** option is used to specify the full path to a file containing the message.

**NOTE** — Since this file name is passed to TOPCOM for transmitting, the TOPCOM processes must be able to open and read this file. When the Tcl script and TOPCOM processes are running on different machines, the file system containing the file to be sent must be accessible (mounted) by both machines.

##### Attributes

This is the complete list of **send** attributes that can be specified: **-dtn**, **-psn**, **-timeout**. The values of these attributes will only impact the particular **send** operation.

### Example

This example sends the string `*sect{a=0;b=1;agg{c=2;d=3;}}%` to the handle `$TOP_conn`.

```
> $TOP_conn send -data "*sect{a=0;b=1;agg{c=2;d=3;}}%"
```

In this example you send the string `*tag=|1|2|3%`.

```
> $TOP_conn send -data "*tag=\\1\\2\\3%"
```

This time you send the file `/mynah/scripts/Topcom/soac.send.01` to the handle `$TOP_conn`.

```
> $TOP_conn send -file "/mynah/scripts/Topcom/soac.send.01"
```

### Side Effects

If the `send` method was successful, the internal send time variable (see `-sendTime`) will be updated.

### Exceptions

- Unable to send the message because
  - TOPCOM send session is down (not in TSOPEN state). See `-sendStatus` attribute
  - Timeout occurred while waiting for a send acknowledgment from the SUT
- File is not accessible (if `-file` attribute was specified)
- Data message is too long, i.e., more than 2400 characters (if `-data` attribute was specified).
- The `-psn` and `-dtn` attribute values are too long (if specified).

## 12.2.2 Attributes

The TOP package contains the following attributes.

### 12.2.2.1 -append

#### Syntax

```
handle receive -append number
```

#### Returns

No result

#### Description

The **-append** attribute instructs the **receive** operation to append the next *number* of successfully received messages to the current received message before returning. The entire message will be accessible as the last received message.

The **-append** attribute is on a per receive basis and can only be specified with the **receive** method.

#### Example

This gets the first piece of a message sent in multiple pieces.

```
> $TOP_conn receive
```

Assume the first piece contains a number of subsequent pieces

```
regexp {(FRAGNUM=)([0-9]+)} [$TOP_conn -data] a b num
```

Receive and append the next pieces together with first piece

```
> $TOP_conn receive -append $num -listen MSG_LISTEN_NEXT
```

This is the entire message made of 1 + \$num pieces

```
> set myMsg [$TOP_conn -data]
```

#### Example

This gets the first piece of a message sent in multiple pieces. Assume that the last piece contains the keyword LAST

```
> $TOP_conn receive
```

Receive and append the next pieces until the message contains the LAST keyword.

```
> while {[regexp {LAST} [$TOP_conn -data]] == 0} {  
    $TOP_conn receive -append 1 -listen MSG_LISTEN_NEXT  
}
```

This is the entire message.

```
> set myMsg [ $TOP_conn -data ]
```

### **Exceptions**

Invalid **-append** attribute value.

### 12.2.2.2 -connections

#### Syntax

```
xmyTop -connections
```

#### Returns

A blank separated list of active connection handle names (e.g., **.xmyTop\_1**, **.xmyTop\_2**, and **.xmyTop\_4**), or the empty string if there are no active connections.

#### Description

The **-connections** attribute lists the names (**handle**) of all active (open) connections to TOPCOM. **-connections** can only be used through the **xmyTop** class command.

#### Example

```
> xmyTop -connections  
.xmyTop_1 .xmyTop_2 .xmyTop_4
```

### 12.2.2.3 -conversion

#### Syntax

```
xmyTop -conversion ?conversionMode?  
xmyTop connect -conversion conversionMode  
handle -conversion
```

#### Returns

When no value is specified it returns the current conversion mode, otherwise no result.

#### Description

The **-conversion** attribute tells the **send/receive** operation how to manipulate the application message before *sending/returning* it to the SUT/script. **-conversion** is set on a per connection basis and is set through the **xmyTop** class command or by the **connect** method.

The valid **-conversion** values are

- **MSG\_TCIS** instructs the **send/receive** operation to automatically insert/remove the two bytes (non-ASCII) prefixes at/from the beginning of each segment of a message sent to/received from the SUT.
- **MSG\_TCIS2** instruct the **send/receive** operation to automatically insert/remove the two bytes (non-ASCII) prefixes at/from the beginning of each segment of a message sent to/received from the SUT, where the message is composed of FCIF segments (Section 14).
- **MSG\_EWNL** instructs the receive operation to append a newline character to each message received from the SUT. No conversion is done on the **send** operation.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is no conversion. The **-maxSegmentLen** attribute is used when converting a TCIS or TCIS2 message for sending.

**-conversion** can be set in the *xmyConfig* file using the **ConversionMode** parameter.

#### Example

```
> set TOP_conn [xmyTop connect -conversion MSG_TCIS ... ]
```

#### Example

```
> $TOP_conn -conversion
```

#### Exceptions

- An invalid conversion mode is specified
- An attempt is made to change the conversion mode using the instance handle

#### 12.2.2.4 -data

##### Syntax

```
handle -data  
handle receive -data
```

##### Returns

The message associated with the most recent receive operation, or the empty string if no messages has been received yet.

##### Description

The **-data** attribute is used to get the message associated with the last **receive** method. If **-data** is used with the **receive** method, the received data will be returned. If the **receive** method fails, an exception will occur and the previously received message will remain unchanged.

##### Example

This checks if string "ORD=56700;" is in last received message.

```
> set msg [ $TOP_conn -data ]  
> regexp {ORD=56700;} $msg
```



### 12.2.2.5 -dtn

#### Syntax

```
xmyTop -dtn ?dtnValue?  
xmyTop connect -dtn dtnValue  
handle -dtn ?dtnValue?  
handle send -dtn dtnValue
```

#### Returns

When no value is specified it returns the current DTN value, otherwise no result.

#### Description

The **-dtn** attribute defines the TOPCOM Destination Transaction Name (DTN) parameter in the TOP message sent to the SUT. The SUT's TOPCOM manager can use this value to determine the routing of the message.

**-dtn** can be set in the *xmyConfig* file using the **TopDefaultDTN** parameter.

#### Example

```
> $TOP_conn send -file "msg1.fcif" -dtn "APP1"
```

#### Exceptions

The DTN attribute value is too long.

### 12.2.2.6 -file

#### Syntax

```
handle -file  
handle receive -file
```

#### Returns

The filename containing the message associated with the most recent **receive** operation, or the empty string if no messages has been received yet.

#### Description

The **-file** attribute retrieves the name of the file, stored in the Message Response Directory, containing the most recent received message. The filename should be saved in the Tcl script in order to access this data if additional messages will be received. Since the Message Response Directory is purged on a regular basis, the contents of this file should be copied to a user area if the message need to be saved on a long term.

If **-file** is used with the **receive** method, the received filename will be returned. If the **receive** method fails, an exception will occur and the previously received filename will remain unchanged.

#### Example

Read the file containing the last received message.

```
> set fd [open [extract_itex]TOP_conn -file] r  
> set data [read[/extract_itex]fd]  
> close[/extract_itex]fd
```

### 12.2.2.7 -listen

#### Syntax

```
xmyTop -listen ?listenMode?  
xmyTop connect -listen listenMode  
handle -listen ?listenMode?  
handle receive -listen listenMode
```

#### Returns

When no value is specified it returns the current listen mode, otherwise no result.

#### Description

The **-listen** attribute returns or sets the listen mode, which determines what messages will be considered by the **receive** method.

When no *listenMode* value is specified, **-listen** returns the current listen mode.

Only messages that have arrived **after** the listen time stamp will be considered by the **receive** operation. The valid **-listen** values are

- **MSG\_LISTEN\_NOW** will set the listen time stamp to the current time. Thus, **receive** will return messages that have arrived after the time the **receive** operation was executed. All messages arrived prior to the receive operation will be ignored (but not removed from the Message Response Directory).
- **MSG\_LISTEN\_NEXT** will instruct **receive** to return the next message that arrived after the current received message. The listen time stamp will not be set. This mode is very useful for retrieving messages in sequence or messages that have arrived within the same second.
- **MSG\_LISTEN\_SEND** will set the listen time stamp to the time the most recent **send** operation was successfully executed. From a client point of view, we can assume that a reply (received message) to a request (sent message) cannot be received before the request itself is sent. On the other hand, if you are emulating the server side, then the receive must be performed first, so the **MSG\_LISTEN\_NOW** value should be used.
- An integer **time value** in UNIX format (i.e. seconds from 1/1/1970). The listen time stamp will be set to this given time, and messages that have arrived after this time will be considered.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is **MSG\_LISTEN\_NOW**.

**-listen** can be set in the *xmyConfig* file using the **ListenMode** parameter.

### Example

Send a request and wait up to 30 seconds for the reply.

```
> $TOP_conn send -data $request_1
> set reply_1 [ $TOP_conn receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

Send the second request.

```
> $TOP_conn send -data $request_2
> set reply_2 [ $TOP_conn receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

### Example

In this example, three **sends** are done before performing any receives, so that a certain degree of parallelism is achieved between the client and server. The **MSG\_LISTEN\_SEND** wouldn't work properly because the first and second replies will be lost if they arrive before the third **send** operation is performed. The **MSG\_LISTEN\_NOW** will also not work if the replies arrive before the receive operation is executed.

Send three different requests expecting three replies.

```
> $TOP_conn send -data $request_1
> set saveTime [ $TOP_conn -sendTime] # save 1st send time
> $TOP_conn send -data $request_2
> $TOP_conn send -data $request_3
```

Get the replies.

```
> set reply_1 [ $TOP_conn receive -data -listen $saveTime]
> set reply_2 [ $TOP_conn receive -data \
-listen MSG_LISTEN_NEXT]
> set reply_3 [ $TOP_conn receive -data \
-listen MSG_LISTEN_NEXT]
```

### Exceptions

Invalid listen mode was specified

### 12.2.2.8 -match

#### Syntax

```
xmyTop -match ?matchTclProc?  
xmyTop connect -match matchTclProc  
handle -match
```

#### Returns

When no value is specified it returns the name of the Tcl procedure used by the receive operation to match (filter) all incoming messages, otherwise no result.

#### Description

The **-match** attribute specifies a Tcl procedure name that will be invoked for each incoming message processed by the **receive** method. Messages that do not satisfy the Tcl **match** procedure will not be returned by the receive operation. By default a **match** procedure is not defined and all messages can be returned by the **receive** method.

**-match** is set on a per connection basis and is set through the **xmyTop** class or by the **connect** method.

The user defined Tcl **match** procedure must take the connection handle name as its only argument and it returns a “1” when there is a match and “0” otherwise. Given the handle name, this match procedure can access the received data by using the **-data** attribute. Since this user defined match procedure is invoked for each message processed by the receive operation, it must be developed with performance considerations.

The existence and validity of the user defined Tcl match procedure will not be checked until the **receive** operation is executed.

**NOTE** — Even though Tcl supports defining procedures named “(”, “#”, and other punctuation and special symbols, you should *not* define your Tcl **match** procedures with these names. Instead, meaningful procedure names should always be used.

**-match** can be set in the *xmyConfig* file using the **MatchProcedure** parameter.

### Example

Receive only those messages containing “host=bluejays”.

```
> proc matchTclProc { $TOP_conn } {  
    return [regexp {host=bluejays} [$TOP_conn -data]]  
}  
set conn1 [xmyTop connect -match matchTclProc ... ]
```

### Exceptions

An attempt is made to change the match procedure using the instance handle

### 12.2.2.9 -maxMsgs

#### Syntax

```
xmyTop -maxMsgs ?number?  
xmyTop connect -maxMsgs number  
handle -maxMsgs ?number?
```

#### Returns

When no value is specified it returns the current message limit, otherwise no result.

#### Description

The **-maxMsgs** attribute specifies the maximum number of messages that can be appended together by the **xmyMsgMatchUntil** procedure. This parameter limits the number of messages appended before the until match conditions are satisfied.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is 10.

**-maxMsgs** can be set in the *xmyConfig* file using the **MaxMsgs** parameter.

#### Exceptions

An invalid **maxMsgs** value is specified

#### Example

```
> $TOP_conn -maxMsgs 25
```

### 12.2.2.10 -maxSegmentLen

#### Syntax

```
xmyTop -maxSegmentLen ?number?  
xmyTop connect -maxSegmentLen number  
handle -maxSegmentLen
```

#### Returns

When no value is specified it returns the value of the current maximum segment length used during TCIS or TCIS2 conversion, otherwise no result.

#### Description

The **-maxSegmentLen** attribute defines the maximum value of the two byte prefix that is inserted at the beginning of each message segment. The two byte prefix contains the length of the segment it precedes, plus the length of the prefix (2 bytes). For **MSG\_TCIS**, the message to be sent is divided into segments that are no more than **maxSegmentLen** - 2 bytes long. For **MSG\_TCIS2** conversion, each FCIF section is considered a segment and will have a preceding two byte length prefix. FCIF sections greater than **maxSegmentLen** bytes long will be segmented. If this attribute is not set by the Tcl script or configuration file, the default value is 65535 bytes.

The **-maxSegmentLen** attribute is set on a per connection basis and is set through the **xmyTop** class or by the **connect** method. The value of **-maxSegmentLen** is only used during the **send** operation when the conversion mode is set to **MSG\_TCIS** or **MSG\_TCIS2**.

**-maxSegmentLen** can be set in the *xmyConfig* file using the **MaxSegmentLen** parameter.

#### Example

```
> set conn1 [xmyTop connect -maxSegmentLen 65535 ... ]
```

#### Exceptions

An attempt is made to change the maximum segment length value using the instance handle.



### 12.2.2.11 -name

#### Syntax

```
xmyTop connect -name connectionName  
handle -name
```

#### Returns

When no value is specified it returns the connection handle name set by the **connect** operation.

#### Description

The **-name** attribute lets you choose the name of the connection rather than having a name internally generated by the **connect** method.

The **-name** attribute is on a per connection basis and the value is set through the **connect** method.

#### Example

Create a connection named “my\_connection”.

```
> xmyTop connect -name my_connection ...
```

#### Exceptions

- A connection with the same name already exists
- An attempt is made to change the connection name using the instance handle

### 12.2.2.12 -psn

#### Syntax

```
xmyTop -psn ?psnValue?  
xmyTop connect -psn psnValue  
handle -psn ?psnValue?  
handle send -psn psnValue
```

#### Returns

When no value is specified it returns the current PSN value, otherwise no result.

#### Description

The **-psn** attribute sets the TOPCOM Presentation Services Name (PSN) parameter in the message being sent to the SUT. The SUT's TOPCOM manager can use this value to determine the routing of the message.

**-psn** can be set in the *xmyConfig* file using the **TopDefaultPSN** parameter.

#### Example

```
> $TOP_conn send -psn "APP2"
```

#### Exceptions

The **-psn** attribute value is too long.

### 12.2.2.13 -recvSession

#### Syntax

```
handle -recvSession
```

#### Returns

The TOPCOM receive session number for the connection associated with the handle.

#### Description

The **-recvSession** attribute returns the receive session number associated with the handle's connection. The TOPCOM receive session number is defined in the configuration file for each protocol handler that connections can be made to.

**-recvSession** can be set in the *xmyConfig* file using the **TopRecvSession** parameter.

#### Example

```
> $TOP_conn -recvSession
```

#### 12.2.2.14 -recvStatus

##### Syntax

```
handle -recvStatus
```

##### Returns

The value “UP” if the TOPCOM receive session is in TSOPEN state, otherwise returns “DOWN”.

##### Description

The **-recvStatus** attribute checks the state of the receive session between MYNAH and the SUT TOPCOM managers. “UP” is returned only if MYNAH’s TOPCOM manager is able to receive message from the SUT’s TOPCOM manager. Even though the receive status is “DOWN”, a **receive** may still be successful if the messages have already arrived and are stored in the Message Response Directory.

**NOTE** — Defining and establishing (opening) the TOP sessions are performed outside of the MYNAH System using TOPCOM commands.

##### Example

```
> $TOP_conn -recvStatus
```

### 12.2.2.15 -recvTime

#### Syntax

```
handle -recvTime
```

#### Returns

The time stamp in UNIX format (i.e., seconds since 1/1/1970) associated with the most recent received message, or 0 if no messages have been received.

#### Description

The **-recvTime** attribute returns the time stamp for the received message. All messages received from the SUT are stamped with the time the message was received by the MYNAH **collector** process.

#### Example

```
> $TOP_conn receive  
> set rtime [$TOP_conn -recvTime]
```

### 12.2.2.16 -sendSession

#### Syntax

```
handle -sendSession
```

#### Returns

The TOPCOM send session number for the connection associated with the handle.

#### Description

The **-sendSession** attribute returns the **send** session number associated with the handle's connection. The TOPCOM **send** session number is defined in the configuration file for each protocol handler that connections can be made to.

**-sendSession** can be set in the *xmyConfig* file using the **TopSendSession** parameter.

#### Example

```
> $TOP_conn -sendSession
```

### 12.2.2.17 -sendStatus

#### Syntax

```
handle -sendStatus
```

#### Returns

The value “UP” if the TOPCOM send session is in TSOPEN state, otherwise returns “DOWN”.

#### Description

The **-sendStatus** attribute returns the state of the send session between MYNAH and SUT TOPCOM managers. “UP” is returned only if MYNAH’s TOPCOM manager is able to **send** message to the SUT’s TOPCOM manager. If the **send** status is not “UP”, the **send** operation will fail.

**NOTE** — Defining and establishing (opening) the TOP sessions are performed outside of the MYNAH System using TOPCOM commands.

#### Example

```
> $TOP_conn -sendStatus
```

### 12.2.2.18 -sendTime

#### Syntax

```
handle -sendTime
```

#### Returns

The time stamp in UNIX format (i.e. seconds since 1/1/1970) associated to the most recent sent message, or 0 if no messages have been sent.

#### Description

The **-sendTime** attribute returns the time the last message was successfully sent over the connection.

#### Example

```
> $TOP_conn1 -sendTime
```



### 12.2.2.19 -timeout

#### Syntax

```
xmyTop -timeout ?timeoutValue?  
xmyTop connect -timeout timeoutValue  
handle -timeout ?timeoutValue?  
handle send -timeout timeoutValue  
handle receive -timeout timeoutValue
```

#### Returns

When no value is specified it returns the current timeout value, otherwise no result.

#### Description

The **-timeout** attribute sets the timeout for the **send** and **receive** operations. For the **send** operation, the timeout is the number of seconds to wait for acknowledgment of the sent message. If the timeout expires, the **send** operation will fail. For the **receive** operation, the timeout is the number of seconds to wait for a message to arrive. If the timeout expires, the receive operation will fail.

If a timeout value was not specified at connect time, the value in the configuration file for the particular protocol handler will be used. The timeout value can be changed for the connection instance, or changed for each individual send or receive operation.

**-timeout** can be set in the *xmyConfig* file using the **Timeout** parameter.

#### Example

Create a connection setting the timeout to five minutes.

```
> set TOP_conn [xmyTop connect -timeout 300 ]
```

The following **receive** waits at most five minutes

```
> $TOP_conn receive
```

The following **receive** waits at most ten minutes

```
> $TOP_conn -timeout 600  
> $TOP_conn receive
```

The following **receive** waits at most one minute

```
> $TOP_conn receive -timeout 60
```

The following **receive** waits at most ten minutes

```
> $TOP_conn receive
```

#### 12.2.2.20 -topcom

##### Syntax

```
xmyTop connect -topcom topcomHandlerName  
handle -topcom
```

##### Returns

When no value is specified it returns the name of the TOPCOM handler, defined in the configuration file, the connection has been established to, otherwise no result.

##### Description

The **-topcom** attribute tells what TOPCOM handler to connect to among those defined in the MYNAH configuration file. The **-topcom** attribute is on a per connection basis and is set through the **connect** method.

This is a required **connect** attribute and no default is provided.

##### Example

Connect to the TOPCOM handler "handler\_1".

```
> set handler [xmyTop connect -topcom "handler_1" ...]
```

##### Exceptions

The TOPCOM handler doesn't exist (see the connect method)

## 12.3 Examples

The following subsections contain example of using the TOP Tcl extensions.

### 12.3.1 Example 1

```
set dir_to_snd_from "/u/mynah/systp/TESTS/fnc/addam4/AOST08"
set my_f_to_send "sacr"
xmyLoadPkg TOP
xmyTop connect -topcom sndsoac6 -name s6
puts "sendSession = [s6 -sendSession]"
puts "sendStatus = [s6 -sendStatus]"
puts "recvSession = [s6 -recvSession]"
puts "recvStatus = [s6 -recvStatus]"
s6 send -file "$dir_to_snd_from/$my_f_to_send"
set resp [s6 receive -listen MSG_LISTEN_SEND \
    -data -timeout 10]
puts "response=$resp"
s6 disconnect
```

### 12.3.2 Example 2

```
# Define the FCIF request message to be sent
set soacReq1 "*sect{a=1;b=2;aggr{a=3;b=4;}}%"

# Define a Tcl procedure to match the response message
# associated with the request message. Assume that the
# response message contains the FCIF tag "ORD" whose value
# starts with the digit 3 or 4 followed by at least one digit
proc procMatchResp1 { $TOP_conn } {
    return [regexp {ORD=(3|4)[0-9]+} [$TOP_conn -data]]
}

# Connect to the SOAC application named "Soac1" setting the
# timeout to 5 minutes and conversion mode to TCIS
set soacConn [xmyTop connect -topcom Soac1 \
    -timeout 300 -conversion MSG_TCIS]

# Send the request message
$soacConn send -data $soacReq1

# Wait for the response message that will satisfy the desired
# match procedure
if {[xmyMsgMatch -1 $soacConn procMatchResp1] == 0} {
    < we have timed out and did not receive a msg>
    xmyExit
}

# The response message has arrived and is ready to be analyzed
set SoacResp1 [$soacConn -data]


<analyze the received message>

# Close the connection and remove the handler
$soacConn disconnect
```

## 13. PRT3270 Tcl Language Extensions

### 13.1 Overview

The MYNAH PRT3270 extension package provides functionality necessary for receiving printer messages (print jobs). The PRT3270 extension package must interface with some type of printer emulation software running in the UNIX environment. For example, there exists IBM 3270 emulation software that emulates an IBM 3287 printer in the UNIX environment. When the emulation software receives an IBM print job, it pipes the print job to a special process that is part of the MYNAH PRT3270 extension package, as shown in [Figure 13-1](#).

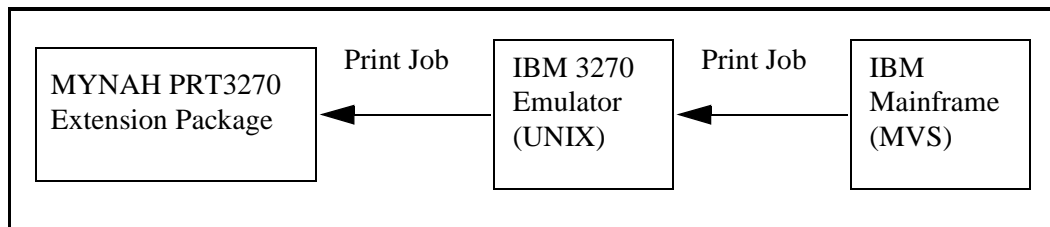

**Figure 13-1.** MYNAH PRT3270 Interactions

Users concerned with testing applications that send messages destined for printers may use the MYHAH PRT3270 Tcl extension package and Tcl language to develop test scripts. The Tcl test scripts can be written to mimic users looking for and verifying the contents of their print jobs.

**NOTE** — To access the PRT3270 Extension Package you must first run **xmyLoadPkg PRT3270**.

The PRT3270 extension package provides functionality to:

- Make one or more logical connections to the printer emulator
- Wait for and receive print jobs from the SUT, saving them as files in an area called the Message Response Directory
- Disconnect from the printer emulator
- Filter unwanted print jobs using user defined match procedures
- Analyze the contents of the print job
- Open and scan all received print jobs saved in the Message Response Directory.

Before using the PRT3270 extension package, the printer emulation software (daemon process) must be configured and running. The IBM 3270 emulation products tested with MYNAH are:

- Sun Microsystems, SunLink SNA 3270 release 8.0
- Sun Microsystems, SunLink BSC 3270 release 8.0
- IO Concepts, 3287 Printer Client release 8.4.

The PRT3270 Extension Package contains a process called a **Collector**, which stores all incoming messages into a special area (the **Message Response Directory**) on disk. The Collector is the only process that receives messages from PrintCom (3270 Printer Emulator) or any other protocol **handler**, which is the logical name of of a PrintCom entry defined in the *xmyConfig* file. All SEs performing a receive operation access the disk in order to get the message they are interested in.

The following is a list and description of the commands in the MYNAH PRT3270 Extension Package.

### 13.1.1 Methods Overview

[Section 13.2.1](#) contains detailed descriptions of the PRT3270 Method extensions. The extensions are listed in alphabetical order (within each category). [Table 13-1](#) lists the extensions, organizing them in general functional categories. [Table 13-1](#) also gives a brief description of each extension and the section where the detailed description can be found.

**Table 13-1.** PRT3270 Method Extensions

Category	Method	Description	Section
<b>Connection</b>	<b>connect</b>	Establishes a logical connection to the MYNAH Collector and 3270 Printer Emulator processes from the MYNAH Tcl script.	<a href="#">13.2.1.1,</a> <a href="#">Page 13–5</a>
	<b>disconnect</b>	Destroys a connection made through the <b>connect</b> method.	<a href="#">13.2.1.2,</a> <a href="#">Page 13–7</a>
<b>Data Entry/Retrieval</b>	<b>receive</b>	Returns a message from the SUT using the 3270 Printer Emulator connection established using the <b>connect</b> method.	<a href="#">13.2.1.3,</a> <a href="#">Page 13–8</a>

### 13.1.2 Attributes Overview

Section 13.2.2 contains detailed descriptions of the PRT3270 Attribute extensions. The extensions are listed in alphabetical order (within each category). Table 13-2 lists the extensions, organizing them in general functional categories. Table 13-2 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 13-2.** PRT3270 Attribute Extensions (Sheet 1 of 2)

Category	Attribute	Description	Section
<b>Connection</b>	<b>-connections\</b>	Lists the names of all active connections.	13.2.2.2, Page 13–12
	<b>-name</b>	Lets you choose the name of the connection.	13.2.2.9, Page 13–20
	<b>-printcom</b>	Specifies what PrintCom handler to connect to.	13.2.2.10, Page 13–21
<b>Data Entry/Retrieval</b>	<b>-append</b>	Instructs the <b>receive</b> operation to append a specified number of successfully received messages.	13.2.2.1, Page 13–10
	<b>-conversion</b>	Tells the <b>receive</b> operation how to manipulate an application message.	13.2.2.3, Page 13–13
	<b>-data</b>	Gets the message associated with the last <b>receive</b> method.	13.2.2.4, Page 13–14
	<b>-file</b>	Gets the name of the file containing the message associated with the last <b>receive</b> method.	13.2.2.5, Page 13–15
	<b>-maxMsgs</b>	Specifies the maximum number of messages that can be appended together by the <b>xmyMsgMatchUntil</b> procedure.	13.2.2.8, Page 13–19
<b>Comparisons</b>	<b>-listen</b>	Returns or sets the listen mode used when receiving messages.	13.2.2.6, Page 13–16
	<b>-match</b>	Specifies a Tcl procedure name that will be invoked for each incoming message processed by the <b>receive</b> method.	13.2.2.7, Page 13–17
<b>Waiting</b>	<b>-timeout</b>	Sets the timeout for the <b>receive</b> operation.	13.2.2.14, Page 13–24

**Table 13-2.** PRT3270 Attribute Extensions (Sheet 2 of 2)

Category	Attribute	Description	Section
Attributes	<b>-recvSession</b>	Returns the receive session number. This is always 0.	<a href="#">13.2.2.11,</a> <a href="#">Page 13–22</a>
	<b>-recvStatus</b>	Checks the state of the receive session. This is always <i>up</i> .	<a href="#">13.2.2.12,</a> <a href="#">Page 13–22</a>
	<b>-recvTime</b>	Returns the time stamp for the last received message.	<a href="#">13.2.2.13,</a> <a href="#">Page 13–23</a>



## 13.2 xmyPrt3270 class

The methods for the **xmyPrt3270** class provides emulation of a 3270 printer so that you can capture messages that a SUT sends to a printer.

### 13.2.1 Methods

The PRT3270 package contains the following methods.

#### 13.2.1.1 connect

##### Syntax

```
xmyPrt3270 connect -printcom name ?attribute list?
```

##### Returns

A handle name to the created **xmyPrt3270** class instance.

##### Description

The **connect** method establishes a logical connection to the MYNAH Collector and 3270 Printer Emulator processes from the MYNAH Tcl script. Upon success, a handle to a connection is returned to the script. The attribute list provides the **xmyPrt3270** instance with initial values that will impact the configuration of this connection only.

Attribute values that are not supplied with **connect** will obtain their values from the **xmyPrt3270** class. If the value is undefined in the **xmyPrt3270** class, or defined as the empty string, the configuration file value will be used. All attribute values of the **xmyPrt3270** class are configurable and can be changed by the user at connect time.

**NOTE** — The *name* input to the **-printcom** attribute match with a PRT3270 protocol handler name defined in the *xmyConfig* file. (See the *MYNAH System Administration Guide*, for information on the *xmyConfig* file.)

##### Attributes

The **-printcom** attribute is required with **connect** .

On a per connection basis the following attributes can only be set in the **xmyPrt3270** class or by **connect** : **-conversion**, **-match**, **-name**, **-printcom**. In other words, the values of these attributes can not be changed using an instance handle (**handle**).

This is the complete list of connection class attributes that can be specified: **-conversion**, **-listen**, **-match**, **-maxMsgs**, **-name**, **-timeout**, and **-printcom**.

### Example

This connects to the printer handler named *printer-13*.

```
> set PRT_com [xmyPrt3270 connect -printcom "printer-13"]
```

### Exceptions

- Unable to establish the connection because:
  - xmyCollector process is not running or can not be contacted.
  - PRT3270 handler name does not exist in configuration file.
  - PRT3270 handler name is not known to the xmyCollector process.
  - PRT3270 handler name is not defined to use the PRT3270 protocol.
  - Timeout waiting for the connection back from the **xmyCollector** process.
- Invalid or missing attribute values.

### 13.2.1.2 disconnect

#### Syntax

```
handle disconnect
```

#### Returns

No result

#### Description

The **disconnect** method destroys the logical connection to the 3270 Printer Emulator made with the **connect** method and identified by **handle**. Once the disconnect call has been made, the handle name associated with the connection is no longer valid and will produce a Tcl “Invalid command name” error message if used.

#### Example

```
> $PRT_conn disconnect
```

### 13.2.1.3 receive

#### Syntax

```
handle receive ?attribute list?
```

#### Returns

The received message (print job) if the **-data** attribute is specified, the filename containing the received message (print job) if the **-file** attribute is specified, otherwise no result.

#### Description

The **receive** method receives a message (print job) from the SUT using the 3270 printer emulator connection established with the **connect** method and identified by **handle**.

All messages received from the 3270 printer emulator will be saved in the Message Response Directory. Depending on the listen mode (see **-listen**, Section 13.2.2.6), the receive operation will look for messages present in the Message Response Directory and/or wait for a message to arrive.

If a Tcl match procedure is defined (see **-match**, Section 13.2.2.7), only messages that satisfy the match procedure will be returned by the receive operation.

#### Attributes

This is the complete list of receive attributes that can be specified: **-file**, **-timeout**, **-listen**, **-append**, **-data**. The values of these attributes will only impact the particular receive operation.

#### Example

This is an example of receiving a message with a timeout of 300 seconds

```
> set message [$PRT_conn receive -data -timeout 300]
```

#### Exceptions

- Unable to receive a message because:
  - timeout occurred while waiting for a message to arrive.
  - invalid user defined Tcl match procedure.
- No messages has been received, but the **-append** attribute was specified
- No messages has been received, but the **MSG\_LISTEN\_NEXT** mode was specified

- Unable to save received message to disk

**NOTE** — The Message Response Directory must be writable by the printer emulation processes. It is recommended that the MYNAH Administrator own both the Message Response Directory and the printer emulation processes.

- Invalid or missing attribute values
- Both the **-data** and **-file** attributes were specified

## 13.2.2 Attributes

The PRT3270 package contains the following attributes.

### 13.2.2.1 -append

#### Syntax

```
handle receive -append number
```

#### Returns

No result

#### Description

The **-append** attribute instructs the receive operation to append the next *number* of successfully received messages to the current received message before returning. The entire message (print job) will be accessible as the last received message.

**-append** is set on a per receive basis and can only be specified with the **receive** method.

#### Example

This sets the first piece of a message sent in multiple pieces.

```
> $PRT_conn receive
```

This assumes the first piece contains number of subsequent pieces.

```
> regexp {(FRAGNUM=)([0-9]+)} [$PRT_conn -data] a b num
```

Receive and append the next pieces together with first piece,

```
> $PRT_conn receive -append $num -listen MSG_LISTEN_NEXT
```

This is the entire message made of 1 + \$num pieces

```
> set myMsg [$PRT_conn -data]
```

#### Example

This gets the first piece of a message sent in multiple pieces. Assume that the last piece contains the keyword LAST.

```
> $PRT_conn receive
```

This receives and appends the next pieces until the message contains the LAST keyword.

```
> while {[regexp {LAST} [$PRT_conn -data]] == 0} {  
    $PRT_conn receive -append 1 -listen MSG_LISTEN_NEXT  
}
```

This is the entire message

```
> set myMsg [$PRT_conn -data]
```

### **Exceptions**

Invalid **-append** attribute value.

### 13.2.2.2 -connections\

#### Syntax

```
xmyPrt3270 -connections
```

#### Returns

A blank separated list of active connection handle names (e.g., **.xmyPrt3270\_1**, **.xmyPrt3270\_2**, or **.xmyPrt3270\_4**), or the empty string if there are no active connections.

#### Description

The **-connections** attribute lists the names (**handle**) of all active connections to a 3270 printer emulator. **-connections** can only be used through the **xmyPrt3270** class command.

#### Example

```
> xmyPrt3270 -connections  
.xmyPrt3270_1 .xmyPrt3270_2 .xmyPrt3270_4
```

#### Example

```
> xmyPrt3270 -connections
```



### 13.2.2.3 -conversion

#### Syntax

```
xmyPrt3270 -conversion ?conversionMode?  
xmyPrt3270 connect -conversion conversionMode  
handle -conversion
```

#### Returns

When no value is specified it returns the current conversion mode, otherwise no result.

#### Description

The **-conversion** attribute tells the receive operation how to manipulate the application message before returning it to the script. The only mode available for the **xmyPrt3270** class is **MSG\_EWNL**, which instructs the receive operation to append a newline character to each message (print job) received from the SUT.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is no conversion.

The **-conversion** attribute is set on a per connection basis and is set through the **xmyPrt3270** class or by the **connect** method.

**-conversion** can be set in the *xmyConfig* file using the **ConversionMode** parameter.

#### Examples

```
> set PRT_conn [xmyPrt3270 connect -conversion MSG_EWNL... ]  
> $PRT_conn -conversion
```

#### Exceptions

- An invalid conversion mode is specified
- An attempt is made to change the conversion mode using the instance handle

#### 13.2.2.4 -data

##### Syntax

```
handle -data  
handle receive -data
```

##### Returns

The message (print job) associated with the most recent receive operation or the empty string if no messages have been received.

##### Description

The **-data** attribute returns the message associated with the most recent receive operation. If **-data** is used with the **receive** method, the received data will be returned. If **receive** fails, an exception occurs and the previously received message remains unchanged.

##### Example

This checks if the string “ORD=56700;” is in last received message,

```
> set msg [ $PRT_conn -data ]  
> regexp {ORD=56700;} $msg
```

### 13.2.2.5 -file

#### Syntax

```
handle -file  
handle receive -file
```

#### Returns

The filename containing the message (print job) associated with the most recent receive operation or the empty string if no messages has been received yet.

#### Description

The **-file** attribute returns the name of the file, stored in the Message Response Directory, containing the most recent received message. The filename should be saved in the Tcl script in order to access this data if additional messages will be received. Since the Message Response Directory is purged on a regular basis, the contents of this file should be copied to a user area if the message need to be saved on a long term.

If **-file** is used with the **receive** method, the received filename will be returned. If **receive** fails, an exception will occur and the previously received filename will remain unchanged.

#### Example

In this example you read the file containing the last received message.

```
> set fd [open [$PRT_conn -file] r]  
> set data [read $fd]  
> close $fd
```

### 13.2.2.6 -listen

#### Syntax

```
xmyPrt3270 -listen ?listenMode?  
xmyPrt3270 connect -listen listenMode  
handle -listen ?listenMode?  
handle receive -listen listenMode
```

#### Returns

When no value is specified it returns the current listen mode, otherwise no result.

#### Description

The **-listen** attribute returns or sets the listen mode, which determines what messages (print jobs) will be considered by the **receive** method.

When no *listenMode* value is specified, **-listen** returns the current listen mode.

Only messages that have arrived *after* the listen time stamp are considered by the **receive** operation. The valid **-listen** values are

- **MSG\_LISTEN\_NOW** will set the listen time stamp to the current time. Thus, **receive** will return messages that have arrived after, the time the receive operation was executed. All messages arrived prior to the **receive** operation will be ignored (but not removed from the Message Response Directory).
- **MSG\_LISTEN\_NEXT** will instruct **receive** to return the next message that arrived after the current received message. The listen time stamp will not be set. This mode is very useful for retrieving messages in sequence or messages that have arrived within the same second.
- An integer **time value** in UNIX format (i.e. seconds from 1/1/1970). The listen time stamp will be set to this given time, and messages that have arrived after this time will be considered.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is **MSG\_LISTEN\_NOW**.

**-listen** can be set in the *xmyConfig* file using the **ListenMode** parameter.

#### Example

```
> set job_1 [ $PRT_conn receive -data -listen MSG_LISTEN_NOW ]
```

#### Exceptions

Invalid listen mode was specified

### 13.2.2.7 -match

#### Syntax

```
xmyPrt3270 -match ?matchTclProc?  
xmyPrt3270 connect -match matchTclProc  
handle -match
```

#### Returns

When no value is specified it returns the name of the Tcl procedure used by the **receive** operation to match (filter) all incoming messages, otherwise no result.

#### Description

The **-match** attribute specifies a Tcl procedure name that will be invoked for each incoming message processed by the **receive** method. Messages that do not satisfy the **match** procedure will not be returned by **receive**. By default a **match** procedure is not defined and all messages can be returned by **receive**.

The **-match** attribute is set on a per connection basis and is set through the **xmyPrt3270** class or by the **connect** method.

The user defined Tcl **match** procedure must take the connection handle name as its only argument and it must return a “1” when there is a match and “0” otherwise. Given the handle, this **match** procedure can access the received data by using the **-data** attribute. Since this user defined **match** procedure is invoked for each message processed by **receive**, it must be developed with performance considerations.

The existence and validity of the user defined Tcl **match** procedure will not be checked until the receive operation is executed.

**NOTE** — Even though Tcl supports defining procedures named “(”, “#”, and other punctuation and special symbols, you should *not* define your Tcl **match** procedures with these names. Instead, meaningful procedure names should always be used.

**-match** can be set in the *xmyConfig* file using the **MatchProcedure** parameter.

#### Example

In this example you receive only those messages containing “host=bluejays”.

```
> proc matchTclProc { $PRT_conn } {  
    return [regexp {host=bluejays} [$PRT_conn -data]]  
}  
> set conn1 [xmyPrt3270 connect -match matchTclProc ... ]
```

## Exceptions

An attempt is made to change the match procedure using the instance handle

### 13.2.2.8 -maxMsgs

#### Syntax

```
xmyPrt3270 -maxMsgs ?number?  
xmyPrt3270 connect -maxMsgs number  
handle -maxMsgs ?number?
```

#### Returns

When no value is specified it returns the current message limit, otherwise no result.

#### Description

The **-maxMsgs** attribute specifies the maximum number of messages that can be appended together inside the **xmyMsgMatchUntil** procedure. This parameter will limit the number of messages appended before the until match conditions are satisfied. The default value is 10.

**-maxMsgs** can be set in the *xmyConfig* file using the **MaxMsgs** parameter.

#### Exceptions

An invalid *MaxMsgs* value is specified

#### Example

```
> $PRT_conn -maxMsgs 25
```

### 13.2.2.9 -name

#### Syntax

```
xmyPrt3270 connect -name connectionName  
handle -name
```

#### Returns

When no value is specified it returns the connection handle name set at connect time.

#### Description

The **-name** attribute lets you to choose the name of the connection rather than having a name internally generated by **connect** .

The **-name** attribute is set on a per connection basis and the value is set through the **connect** class.

#### Example

This is an example of creating a connection named **printer1**.

```
> xmyPrt3270 connect -name printer1...
```

#### Exceptions

- A connection with the same name already exists
- An attempt is made to change the connection name using the instance handle



### 13.2.2.10 -printcom

#### Syntax

```
xmyPrt3270 connect -printcom printcomHandlerName  
handle -printcom
```

#### Returns

When no value is specified it returns the name of the 3270 printer emulation handler the connection has been established to, otherwise no result.

#### Description

The **-printcom** attribute tells what PRT3270 handler to connect to among those defined in the MYNAH configuration file. This is a required **connect** attribute and no default is provided.

The **-printcom** attribute is set on a per connection basis and is set through the **connect** method.

#### Example

This is an example of connecting to the print handler **handler\_1**.

```
> set handler [xmyPrt3270 connect -printcom "handler_1" ...]
```

#### Exceptions

The print handler doesn't exist (see the **connect** method)

### 13.2.2.11 -recvSession

#### Syntax

```
handle -recvSession
```

#### Returns

Always returns the value “0”.

#### Description

Unlike TOPCOM, session numbers are not used in the PRT3270 Extension Package. The **-recvSession** attribute was added to the **xmyPrt3270** class for consistency with the **xmyTop** class.

#### Example

```
> $PRT_conn -recvSession
```

### 13.2.2.12 -recvStatus

#### Syntax

```
handle -recvStatus
```

#### Returns

Always returns the value “UP”.

#### Description

If the MYNAH collector process is running, it will always be ready to receive messages from the printer emulation processes. Unlike TOPCOM, there are no sessions that can change status. The **-recvStatus** attribute was added to the **xmyPrt3270** class for consistency with the **xmyTop** class.

#### Example

```
> $PRT_conn -recvStatus
```

### 13.2.2.13 -recvTime

#### Syntax

```
handle -recvTime
```

#### Returns

The time stamp in UNIX format (i.e. seconds since 1/1/1970) associated with the most recent received message, or 0 if no messages (print jobs) have been received.

#### Description

The **-recvTime** attribute returns the time stamp for the received message. All messages (print jobs) received from the SUT are stamped with its arrival time by the MYNAH **xmyCollector** process.

#### Example

```
> $PRT_conn receive  
> set rtime [$PRT_conn -recvTime]
```

### 13.2.2.14 -timeout

#### Syntax

```
xmyPrt3270 -timeout ?timeoutValue?  
xmyPrt3270 connect -timeout timeoutValue  
handle -timeout ?timeoutValue?  
handle receive -timeout timeoutValue
```

#### Returns

When no value is specified it returns the current timeout value, otherwise no result.

#### Description

The **-timeout** attribute sets the timeout for the receive operation. For a **receive**, the timeout is the number of seconds to wait for a message to arrive. If the timeout expires, the **receive** operation fails.

If a timeout value was not specified at connect time, the value in the configuration file for the particular protocol handler will be used. The timeout value can be changed for the instance after the connection or changed for each individual receive operation.

**-timeout** can be set in the *xmyConfig* file using the **Timeout** parameter.

#### Example

Create a connection setting the receive timeout to five minutes.

```
> set handle [xmyPrt3270 connect -timeout 300 ... ]
```

The following **receive** waits at most five minutes.

```
> $PRT_conn receive
```

The following **receive** waits at most ten minutes

```
> $PRT_conn -timeout 600
```

```
> $PRT_conn receive
```

The following **receive** waits at most one minute

```
> $PRT_conn receive -timeout 60
```

The following **receive** waits at most ten minutes

```
> $PRT_conn receive
```

### 13.3 Example

Establish a connection for the printer named "printer\_10".

```
> set handle [xmyPrt3270 connect -printer "printer_10"]
```

Wait up to 10 minutes to receive a message.

```
> xmyMsgMatch 600 $PRT_conn procMatchMsg1
```

```
> set msg1 [$PRT_conn -data]
```

<analyze the message>

Close the connection and remove the handler.

```
> $PRT_conn disconnect
```



## 14. FCIF Tcl Language Extensions

### 14.1 Overview

This chapter describes the class command and methods available in the MYNAH System to process and analyze Flexible Computer Interface Format (FCIF) messages.

**NOTE** — To access the FCIF Extension Package you must first run **xmyLoadPkg TOP**.

#### 14.1.1 Methods Overview

Section 14.2.1 contains detailed descriptions of the FCIF Method extensions. The extensions are listed in alphabetical order (within each category). Table 14-1 lists the methods, organizing them in the general functional categories. Table 14-1 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 14-1.** FCIF Method Extensions

Category	Method	Description	Section
Connection	<b>create</b>	Establishes a handle to an <b>xmyFcif</b> instance.	14.2.1.1, Page 14-3
	<b>destroy</b>	Removes a handle to an <b>xmyFcif</b> instance.	14.2.1.4, Page 14-10
Comparisons	<b>compare</b>	Compares the value of each tag in the master FCIF message to the corresponding value in the current FCIF message.	14.2.1.2, Page 14-5
	<b>compareTags</b>	Compares FCIF tags pulled out of the current message.	14.2.1.3, Page 14-7
	<b>extraTags</b>	Makes sure the current FCIF has no tags that are not present in the master FCIF.	14.2.1.5, Page 14-11
	<b>getTag</b>	Copies a substring of an FCIF value from the current FCIF.	14.2.1.6, Page 14-13
	<b>reorder</b>	Changes the order of like named sections or aggregates of both the current and master FCIF.	14.2.1.7, Page 14-14

## 14.2 xmyFcif Class

**xmyFcif** is the Tcl class command providing methods for manipulating and validating data that is in FCIF format. These methods support the following:

- Determining the differences between two FCIF strings. Output includes the presence of extra tags or missing tags.
- Creating a TVO (Tag Value Object) from an FCIF.
- Providing reorder of FCIF capability.



## 14.2.1 Methods

The FCIF package contains the following methods.

### 14.2.1.1 create

#### Syntax

```
xmyFcif create ?-file fileName? ?-fileMaster fileMasterName? \  
             ?-data fcif? ?-dataMaster fcifMaster? \  
             ?-name handleName?
```

#### Returns

Handle to an **xmyFcif** instance.

#### Description

The **create** method creates a handle for processing FCIF messages. It takes either one or two FCIF messages and returns a handle that is then used with a method to perform the desired operation.

The FCIF messages can be provided by either specifying the filename containing the message or giving the message itself as a string. Any combination of filename and string arguments with the current and master messages is allowed.

At least one FCIF message is always required and is considered to be the current message; this is the message to be processed or analyzed. A second message is optional and is considered to be the master message. The master message acts as the base of comparison against the current message for certain methods, so it's not required unless one of these operations is performed.

**NOTE** — The scope of **xmyFcif**'s handles is the script.  
Thus, handles cannot be passed to other scripts.

**create** takes the following options:

- |  |   |
|--|---|
| <b>-file</b> <i>fileName</i>             | Specifies the file containing the “current” message to be processed or analyzed.<br><br>Either this option or <b>-data fcif</b> is required.  |
| <b>-fileMaster</b> <i>fileMasterName</i> | Specifies the file containing the “master” message that is to be compared against the current message that has been specified using either the <b>-file</b> or <b>-data</b> option. |

<b>-data <i>fcif</i></b>	Specifies the “current” message to be processed or analyzed. <i>fcif</i> can be an actual string or a variable set to the string.
<b>-name <i>handleName</i></b>	Either this option or <b>-file <i>fileName</i></b> is required. Specifies name of the handle. If not specified, a default name is generated.
<b>-dataMaster <i>fcifMaster</i></b>	Specifies the “master” message that is to be compared against the current message that has been specified using either the <b>-file</b> or <b>-data</b> option. <i>fcifMaster</i> can be an actual string or a variable set to the string.

### Example

In this example. the current message is in the file `/tmp/MsgDir/file001`, and the master file is in `/u/tom/file001.master`.

```
> set connFCIF [xmyFcif create -file /tmp/MsgDir/file001 \  
-fileMaster /u/tom/file001.master]
```

In this example. the current message, `*sect{a=3;b=2;c=4;}%`, has been assigned to a variable. Instead of comparing this message against another string, it is compared against a master string saved in the file `/u/tom/file.master`.

```
> set message "*sect{a=3;b=2;c=4;}%"  
> set connFCIF [xmyFcif create -data $message \  
-fileMaster /u/tom/file.master]
```

### Exceptions

- file(s) not found
- invalid FCIF message(s)

### 14.2.1.2 compare

#### Syntax

```
handle compare ?-excludedTags tagList? ?-warning?
```

#### Returns

The list of tags whose comparison failed

#### Description

This **compare** method verifies an FCIF message by comparing the value of each tag in the master FCIF message to the corresponding value in the current FCIF message. If a tag does not exist or the value does not match, this is considered a failed compare.

**compare** takes the following options:

- excludedTags *tagList*** Exclude some tags from the comparison. *tagList* is a list of tags that will not be searched and compared. For example, if the tester knows of a tag that varies between executions, such as a date, the tester can provide the tag name to the **compare** method using the **-excludedTags** options. The *tagList* format is defined below.
- warning** Increment **xmyVar(WarningCompares)**.

The *tagList* format is

```
{tag1 tag2 ... tagN}
```

where each tag has the following format

```
sectionName(occurrence):aggregateName(occurrence).tagName(occurrence)
```

*occurrence* is the number of the section, aggregate, or tag occurrence. If omitted then the appropriate *occurrence* value will default to 1. If *sectionName* is omitted but its occurrence is specified then the *occurrence-th* unnamed section of the FCIF message will be taken into consideration.

#### Side Effects

**compare** increments the **goodcompare** and **failedcompare** counters. The warning counter will be incremented only if the **-warning** option was specified.

**compare** also produces “expected and actual data” in the script output compare file.

In the MYNAH version prior to 5.0 the functionality of this method was implemented by the directive **checktags**. This directive was affected by the **autoprt** flag. When the flag was ON **checktags** produced output into the log file for each failed compare and incremented the Error Count variable for each failed compare or incremented the Good Count variable if there was no failed compare.

### Example

In this example we compare the current FCIF message against the master FCIF message. This example excludes from the comparison all tags containing a date value. We know that there are as many date tags as request aggregate plus a date tag for the FCIF message itself. These tags are in the first section only.

```
> set tagList [$connFCIF compare {sect:date \  
                                sect:request(*).date}]
```

### Exceptions

The master FCIF message was not specified at handle creation time.

### 14.2.1.3 compareTags

#### Syntax

```
handle compareTags -tag tagName -value value ?-offset int? \  
?-length int? ?-operator operatorName?
```

#### Returns

A list of one or more element. The first element is the number of tags specified by the **-tag** option. Following elements, if any, are the name of the tags that failed the comparison.

#### Description

The **compareTags** method compares FCIF tags pulled out of the current message with the *values* provided by the user and returns the results of the comparison.

**compareTags** takes the following options:

- |                            |  |
|----------------------------|--|
| <b>-tag <i>tagName</i></b> | Specifies the FCIF tags to be checked. More than one tag can be checked by <b>compareTags</b> if more than one tag in the message satisfies the criteria given in the <i>tagName</i> argument. The <i>tagName</i> format is defined below. |
| <b>-value <i>value</i></b> | Specifies the value provided to be compared with the FCIF tags.  |
| <b>-offset <i>int</i></b>  | Defines the offset into the FCIF value. Used with <b>-length</b> to define the substring of the FCIF value. An offset of 0 is the beginning of the value. The default value is 0.  |
| <b>-length <i>int</i></b>  | Defines the length of the FCIF value to be compared. Used with <b>-offset</b> to define the substring of the FCIF value. A length of 0 is the entire value. The default value is 0.  |

**-operator *operatorName*** Specifies the name of the relational operator to be used to compare the FCIF tag with the **-value** option. The following operators are defined:

- EQ (equal to)
- NE (not equal to)
- LT (less than)
- LE (less than or equal to)
- GT (greater than)
- GE (greater than or equal to)
- IN (substring of)
- NI (not substring of)

where the left operand is assumed to be the FCIF tag and the right operand is the value provided by the user. The default relational operator is EQ.

The **tagName** format is

```
sectionName(occurrence):aggregateName(occurrence).tagName(occurrence)
```

**occurrence** is the number of the section, aggregate, or tag occurrence. If omitted then the appropriate **occurrence** value will default to 1. The **occurrence** can also be the character star (\*). In such a case all existing **occurrence** will be taken into consideration. **sectionName** and its **occurrence** are optional and if omitted then all sections will be taken into consideration. If **sectionName** is omitted but its occurrence is specified then the *occurrence-th* unnamed section of the FCIF message will be taken into consideration.

Each of the **compareTags**' arguments can be a list of more than one value. This is used to perform more than one comparison with the same command. One of this application is the directive **fcifmatch** of the LMA language in the version of MYNAH prior to 5.0 (see the example).

### Side Effects

- **compareTags** also produces "expected and actual data" in the script output compare file.
- Increments **xmyVar(GoodCompares)** and **xmyVar(FailedCompares)**.

### Example

```
> $connFCIF compareTags -tag sect:session.host -value bluejays
```

```
> $connFCIF compareTags -tag sect:session.host -length 8 \  
    -value bluejays
```

```
> $connFCIF compareTags -tag size -operator LT -value 512
```

This is an example of an implementation of the **fcifmatch** directive.

```
> $connFCIF compareTags -tag {C1 C1 C1 C1} \  
    -offset {1 7 8 19} \  
    -length {3 1 6 1} \  
    -value {PRE N 123R34 A}
```

This is an example of an implementation of the **soprespc** directive.

```
> $connFCIF compareTags -tag (*):SN -value $responseCode
```

#### 14.2.1.4 destroy

##### **Syntax**

```
handle destroy
```

##### **Returns**

No result.

##### **Description**

The **destroy** method destroys a handle created by the **xmyFcif create** class method.

##### **Example**

```
> $connFCIF destroy
```



### 14.2.1.5 extraTags

#### Syntax

```
handle extraTags ?-excludedTags tagList? ?-warning?
```

#### Returns

The list of extra tags found in the current FCIF message.

#### Description

The **extratags** method verifies an FCIF message by making sure the current FCIF has no tags that are not present in the master FCIF.

**extratags** takes the following options:

- excludedTags *tagList*** Exclude some tags from analysis. *tagList* is a list of tags that will not be searched and compared. For example, if the tester knows of a tag that may appear but is not in the master FCIF, the tester can provide the tag name to the **compare** method using the **-excludedTags** options. The *tagList* format is defined below.
- warning** Increment **xmyVar(WarningCompares)**.

The *tagList* format is

```
{tag1 tag2 ... tagN}
```

where each tag has the following format

```
sectionName(occurrence):aggregateName(occurrence).tagName(occurrence)
```

*occurrence* is the number of the section, aggregate, or tag occurrence. If omitted then the appropriate *occurrence* value will default to 1. The *occurrence* can also be the character star (\*). In such a case all existing *occurrence* will be taken into consideration. *sectionName* and its *occurrence* are optional and if omitted then all sections will be taken into consideration. If *sectionName* is omitted but its occurrence is specified then the *occurrence-th* unnamed section of the FCIF message will be taken into consideration.

#### Side Effects

**extratags** increments **xmyVar(GoodCompares)** and **xmyVar(FailedCompares)**. The warning counter will be incremented only if the option **-warning** was specified.

#### Example

```
> set tagList [$connFCIF extratags {sect:agg(*) .date \  
sect:fragment}]
```

## Exceptions

The master FCIF message was not specified at handle creation time.

#### 14.2.1.6 getTag

##### Syntax

```
handle getTag -tag tagName ?-offset int? ?-length int?
```

##### Returns

The specified substring of the FCIF tag.

##### Description

The **getTag** method copies a substring of an FCIF value from the current FCIF and returns it as the return value of the method. A substring of the FCIF can be specified with the last two parameters.

**getTag** takes the following options:

- tag *tagName*** Specifies the substring with the name *tagName*. The *tagName* format is defined below.
- offset *int*** Define the offset of a substring into the FCIF value. The default is 0.
- length *int*** Specifies the length of a substring. The default is 0.

The *tagName* has the following format:

```
sectionName(occurrence):aggregateName(occurrence).tagName(occurrence)
```

*occurrence* is the number of the section, aggregate, or tag occurrence. If omitted then the appropriate *occurrence* value will default to 1. If *sectionName* is omitted but its occurrence is specified then the *occurrence-th* unnamed section of the FCIF message will be taken into consideration.

##### Example

This example gets the *host* tag in the session *aggregate* in the section *sect*.

```
> $connFCIF getTag -tag sect:session.host -length 8
```

This example gets the *C1* tag in the first unnamed section

```
> $connFCIF getTag -tag (1):C1
```

#### 14.2.1.7 reorder

##### Syntax

```
handle reorder -aggregate aggregateName ?-key tagList?
```

##### Returns

No return.

##### Description

The **reorder** method changes the order of like named sections or aggregates of both the current and master FCIF, using values of tags inside the aggregate to determine the new ordering. This is useful when you have an application that sends like named aggregates in a random order. By using this directive, the tester can put the aggregate into a predictable order which makes the FCIF methods return accurate results.

**reorder** method takes the following options:

- aggregate *aggregateName*** Specifies the name of the section or aggregate that needs to be reordered. The *aggregateName* format is defined below.
- key *tagList*** Specifies a list of one or more tag names to be used as a key in reordering the aggregate. It can be any tag that is inside the aggregate to be reordered. The *tagList* format is defined below.

The *aggregateName* format is the following:

```
sectionName(occurrence):aggregateName(occurrence)
```

where the *occurrence* is the number of the section or aggregate occurrence. If omitted then it will be defaulted to 1. If the *sectionName* is omitted but its occurrence is specified then the *occurrence-th* unnamed section of the FCIF message will be taken.

The *tagList* format is the following:

```
aggregateName(occurrence):tag(occurrence)
```

More than one key tag can be used if a single tag is not sufficient to uniquely identify the ordering of the aggregate. This is needed when the value of the first key tag is the same in multiple aggregates.

##### Example

```
> $connFCIF reorder -aggregate sect(2).agg \  
-key {ordnum(1) ntu(1)}
```

## 15. Message Response Directory Tcl Language Extensions

The Message Response Directory extensions provide a mechanism to easily scan all messages that have arrived on a particular communications channel and have been saved to disk.

**NOTE** — For more information on Application to Application related extensions,

- See Section 11 for information on the General App-to-App extension package
- See Section 12 for information on the TOP extension package
- See Section 13 for information on the PRT3270 extension package
- See Section 14 for information on the Flexible Computer Interface Format (FCIF) extension package.

There are three categories of Message Response Directory Tcl Language Extensions. Table 15-1 lists these categories, including providing a description of each category.

**Table 15-1.** Message Response Directory Tcl Language Extension Categories

Section Title	Description	Section Number
<b>xmyMsgDir class</b>	Provides a mechanism to easily scan all messages that have arrived saved to disk.	15.1, Page 15-2
<b>Match Tcl Extensions</b>	Determine whether received messages match specified criteria.	15.2, Page 15-23
<b>xmyMsgMarkFile</b>	Mark/unmark a message in the Message Response Directory.	15.3, Page 15-28

**NOTE** — In incoming message, all null characters are changed to blanks.

## 15.1 xmyMsgDir class

The **xmyMsgDir** class provides a mechanism to easily scan all messages that have arrived on a particular communications channel and have been saved to disk into an area named the **Message Response Directory**. Since the space of the Message Response Directory is limited, a **Garbage Collector** needs to be developed by the user to remove the oldest messages when space is needed for new messages. Each message has an arrival time stamp associated to it. This time stamp, along with the time stamp (**time position**) set by the **xmyMsgDir** instance handle, is used to access the desired message. Users modify the time position of the handle in order to navigate into the Message Response Directory.

Attributes modifying the time position always take precedence over other attributes or commands specified on the same command line.

### 15.1.1 Methods

The Message Response Directory package contains the following methods.

#### 15.1.1.1 close

##### Syntax

```
handleName close
```

##### Returns

No result

##### Description

The **close** method destroys the handle created through the **xmyMsgDir open** class method. Once the close call has been made, the handle name can no longer be used to scan the Message Response Directory, and will produce a Tcl “Invalid command name” error if used.

**NOTE** — The message directory will be deleted if it is empty, i.e. if there are no more message.

##### Example

```
> $MSG_conn close
```

### 15.1.1.2 delete

#### Syntax

```
handle delete -file fileName  
handle delete -all
```

#### Returns

No result

#### Description

The **delete** method deletes the specified message file within a given sub directory or delete all the messages within a given sub directory. The sub directory is specified in the **open** method.

**delete** takes the following attribute:

- file *fileName*** Deletes the message specified by *fileName*, which can be obtained by using the **-file** option on the **receive** method
- all** Deletes all messages for a connection. The **-all** option is usually used before disconnecting the connection.

#### Example

```
$MSG_conn delete -filename 854028294.63.2  
$MSG_conn delete -all
```

**NOTE** — If the sub directory is not specified while opening the message directory and **-all** option is used for deleting, all the messages for the given application will be deleted. The **-all** option should be used with caution.

### 15.1.1.3 open

#### Syntax

```
xmyMsgDir open -topcom "handlerName" ?attribute list?  
xmyMsgDir open -printcom "handlerName" ?attribute list?  
xmyMsgDir open -handler "handleName" ?attribute list?
```

#### Returns

A handle (*handleName*) to the created **xmyMsgDir** class instance.

#### Description

The **open** method loads into memory the name of the files in the Message Response Directory received by the specified topcom or printcom protocol handler name. Each protocol handler name has a separate Message Response subDirectory for storing its received messages. Upon success, a handle is returned to the script.

The attributes that can be specified are **-marked**, **-subDir**, **-maxMsgs**, **-printcom**, and **-topcom**.

#### Remarks

Messages of all mark types (see **-marked**, Section 15.1.2.6) are loaded. Messages are loaded in order from newest to oldest.

Either the **-topcom** or **-printcom** or **-handler** attribute is required with the **open** method. The attribute value (handler name) is the same value used in the **xmyTop connect** and **xmyPrt3270 connect** methods and must match with a protocol handler entry in the configuration file.

On a per handle basis the following optional attribute can only be set through this initial open call: **-maxMsgs**.

The attributes that can be specified are **-marked**, **-maxMsgs**, **-printcom**, and **-topcom**.

#### Example

This creates a handle to scan messages received by the TOPCPM handler named **handler\_1**.

```
> set MSG_conn [xmyMsgDir open -topcom handler_1]
```

#### Exceptions

- Unable to access the Message Response Directory
- Unable to open and load files from the Message Response Directory because handler name does not exist in the configuration file.



## 15.1.2 Attributes

The Message Response Directory package contains the following attributes.

### 15.1.2.1 -data

#### Syntax

```
handleName -data
```

#### Returns

The data associated with the message at the handle's current time position, or the empty string if the current position has not been set.

#### Description

The **-data** attribute is used to return the message at the current time position in the Message Response Directory. The **-first**, **-last**, and **-position** attributes can be used to initially set the handle's time position.

#### Example

This retrieves the first (newest) message in the Message Response Directory.

```
> $MSG_conn -first  
> set message [$MSG_conn -data]
```

### 15.1.2.2 -file

#### Syntax

*handleName* -file

#### Returns

The file name containing the message at the handle's current time position or the empty string if the current position has not been set.

#### Description

The **-file** attribute returns the file name containing the message at the current time position in the Message Response Directory. The **-first**, **-last**, and **-position** attributes can be used to initially set the handle's time position.

#### Example

This gets the current Message Response Directory file name.

```
> set fileName [$MSG_conn -file]
```

### 15.1.2.3 -first

#### Syntax

```
handleName -first
```

#### Returns

No result

#### Description

The **-first** attribute sets the handle's current time position to the first (newest) message in the Message Response Directory based on the **-marked** attribute value.

#### Example

This positions the handle to the newest received message in the Message Response Directory.

```
> $MSG_conn -first
```

#### Exceptions

A first message does not exist because the message table is empty.

#### 15.1.2.4 -handler

##### Syntax

```
xmyMsgDir open -handler generalPurposeHandlerName
```

##### Returns

No result.

##### Description

The **-handler** attribute is set on a per handle basis and is set only through the **xmyMsgDir open** class method. Given the *generalPurposeHandlerName*, a search is performed in the configuration file to determine the location (Message Response Directory) of the received messages to load. Since the General App-to-App protocol does not use session numbers, the default value is 0. The *generalPurposeHandlerName* is the same value that is required for the **xmyAppApp connect** class method

##### Example

```
# create a handle to get messages from the printcom handler  
# named "printer_1"  
  
> set MSG_conn [xmyMsgDir open -handler app_1]
```

##### Exceptions

The specified handler does not exist in the configuration file.

### 15.1.2.5 -last

#### Syntax

*handleName* -last

#### Returns

No result

#### Description

The **-last** attribute sets the handle's current time position to the last (oldest) loaded message in the Message Response Directory based on the **-marked** attribute value

#### Example

This gets the file name containing the oldest message received.

```
> $MSG_conn -last  
> set fileName [$MSG_conn -file]
```

#### Exceptions

A last message does not exist because the message table is empty.

### 15.1.2.6 -marked

#### Syntax

```
xmyMsgDir open -marked markType  
handleName -marked ?markType?
```

#### Returns

When no value is specified it returns the current mark type, otherwise no result

#### Description

The **-marked** attribute tells the handle to take in consideration only messages that are marked with the **markType** postfix. The valid values for markType are MSG\_CLAIMED, MSG\_TCIS, MSG\_TCIS2, and MSG\_EWNL. If this attribute is not specified, then all messages will be considered.

**NOTE** — The **open** operation will always load messages of all/any mark types.

#### Example

This positions the handle to the first TCIS2 converted messages.

```
> $MSG_conn -marked MSG_TCIS2 -first
```

#### Exceptions

Invalid attribute value.

### 15.1.2.7 -maxMsgs

#### Syntax

```
xmyMsgDir open -maxMsgs number
```

#### Returns

No result.

#### Description

The **-maxMsgs** attribute is used to control the number of messages (file names) in the Message Response Directory which are loaded into memory when the handle is created. The messages are loaded starting with the newest messages. If this attribute is not specified or if the value of 0 is specified, **all** messages in the directory will be loaded. The **-numMsgs** attribute can be used to return the actual number of messages loaded.

#### Example

This loads the first (newest) 200 messages received by the SOAC1 TOPCOM handler.

```
> xmyMsgDir open -topcom SOAC1 -maxMsgs 200
```

#### Exceptions

Invalid attribute value

### 15.1.2.8 -move

#### Syntax

```
handleName -move ?time?
```

#### Returns

When no value is specified it returns the current “move time value”, otherwise no result

#### Description

The **-move** attribute computes the “move time value” by adding a positive attribute value or subtracting a negative value from the handle’s current time position. The move attribute value is a time expressed in seconds. The handle’s current position is set to the first message in the Message Response Directory which arrived *after* the computed “move time value”.

#### Example

This gets the next message that arrived five minutes after the current message.

```
> $MSG_conn -move 300 -data
```

#### Exceptions

- The current time position in the Message Response Directory has not be set.
- No message can be found after the computed “move time value”
- Invalid attribute value



### 15.1.2.9 -msgDir

#### Syntax

```
handleName -msgDir
```

#### Returns

The path to the Message Response Directory associated with the handle

#### Description

The **-msgDir** attribute returns the Message Response Directory that was opened and loaded when the **xmyMsgDir** handle was created.

#### Example

```
> $MSG_conn -msgDir
```

### 15.1.2.10 -next

#### Syntax

*handleName* -next

#### Returns

No result

#### Description

Based on the **-marked** attribute value, the **-next** attribute sets the handle's current time position to the next received (newer) message loaded from the Message Response Directory.

#### Example

This gets the file name of the next received EWNL converted message.

```
> $MSG_conn -marked MSG_EWNL
> $MSG_conn -next
> set MSG_file [$MSG_conn -file]
```

#### Exceptions

- No next message is found
- The current time position in the Message Response Directory has not be set.

### 15.1.2.11 -numMsgs

#### Syntax

```
handleName -numMsgs
```

#### Returns

The number of messages loaded from the Message Response Directory

#### Description

The **-numMsgs** attribute returns the number of messages (file names) loaded into memory from the Message Response Directory when the **xmyMsgDir** instance handle was created using the **open** attribute. The **-maxMsgs** attribute can be used to control the number of messages loaded.

#### Example

```
> $MSG_conn -numMsgs
```

### 15.1.2.12 -position

#### Syntax

```
handleName -position ?time?
```

#### Returns

The handle's current time position in the Message Response Directory when no value is specified, otherwise no result.

#### Description

The **-position** attribute sets the handle's current time position to the first message in the Message Response Directory which arrived *after* the given position attribute value. The position value is the time in UNIX format (i.e. seconds elapsed since 1/1/1970). When no value is specified the current time position is returned.

#### Example

This returns the TCIS converted message that arrived after time 89234234.

```
> $MSG_conn -marked MSG_TCIS  
> $MSG_conn -position 89234234 -data
```

This returns the time position of the current message.

```
> $MSG_conn -position
```

#### Exceptions

- No message can be found after the given time position
- Invalid time position value

### 15.1.2.13 -prev

#### Syntax

*handleName* -prev

#### Returns

No result

#### Description

The **-prev** attribute sets the handle's current time position to the previous received (older) message in the Message Response Directory.

#### Example

This returns get the time stamp of the previous message.

```
> $MSG_conn -prev
```

```
> $MSG_conn -position
```

#### Exceptions

- No previous message is found
- The current time position in the Message Response Directory has not be set.

#### 15.1.2.14 -printcom

##### Syntax

```
xmyMsgDir open -printcom printcomHandlerName
```

##### Returns

No result. This attribute can only be specified with the **open** method

##### Description

The **-printcom** attribute is set on a per handle basis and is set only through the **xmyMsgDir open** class method. Given the *printcomHandlerName*, a search is performed in the configuration file to determine the location (Message Response Directory) of the received messages to load. Since the PRINTCOM protocol does not use session numbers, the default value is 0. The *printcomHandlerName* is the same value that is required for the **xmyPrt3270 connect** class method

##### Example

This creates a handle to get messages from the PRT3270 handle named **printer\_1**.

```
> set handle [xmyMsgDir open -printcom printer_1]
```

##### Exceptions

The specified PrintCom handler does not exist in the configuration file.

### 15.1.2.15 -recvSession

#### Syntax

```
handleName -recvSession
```

#### Returns

The receive session number associated with the messages in the Message Response Directory

#### Description

The **-recvSession** attribute returns the session number which the messages were received on. The **xmyMsgDir** instance handle was created with a given protocol handler name and each protocol handler entry in the configuration file has a receive session number.

#### Example

```
> $MSG_conn -recvSession
```

#### 15.1.2.16 -subDir

##### Syntax

```
xmyMsgDir connect -subDir subDir
```

##### Returns

The connection handle.

##### Description

The **-subDir** attribute lets you specify a subdirectory. The messages are stored in a separate directory for each configured AppApp protocol handler, for example, *\$XMYHOME/data/messages/AppApp/app\_1*. The given sub directory is appended to this path.

**NOTE** — This option is not valid for TOPCOM or PrintCom handlers.

**-subDir** is useful for cases where connection oriented protocol is used for sending and receiving messages. Connection oriented means not using the **-broadcast** attribute. In such cases, the messages are stored in a sub directory identified by the connection id.

##### Example

```
> xmyMsgDir connect -subDir conn_1 -handler app_1
```



### 15.1.2.17 -topcom

#### Syntax

```
xmyMsgDir open -topcom topcomHandlerName
```

#### Returns

No result. This attribute can only be specified with the **open** method

#### Description

The **-topcom** attribute is set on a per handle basis and is set only through the **xmyMsgDir open** class method. Given the *topcomHandlerName*, a search is performed in the configuration file to determine the location (Message Response Directory) and session number of the received messages to load. The *topcomHandlerName* is the same value that is required for the **xmyTop connect** class method

#### Example

This create a handle to scan messages received by the TOPCOM handle named **handler\_1**.

```
> set MSG_conn [xmyMsgDir open -topcom handler_1]
```

#### Exceptions

The specified topcom handler does not exist in the configuration file

### 15.1.3 Example

This example scans the first 250 messages received by TOPCOM handler **LFACS\_1** looking for the newest TCIS2 converted message that contains the tag "SEQ" with the value of "4579" (i.e., SEQ=4579).

```
# Load the newest 250 LFACS_1 messages
set dirHandle [xmyMsgDir open -topcom "LFACS_1" -maxMsgs 250]

# Interested in only the TCIS messages
$dirHandle -marked MSG_TCIS2

# Set the handle to the newest (first) TCIS2 message
$dirHandle -first

# Loop through the TCIS2 messages from newest to oldest
# looking for "SEQ=4579"
while { [regexp "SEQ=4579" [$dirHandle -data]] != 1 } {

    # Get the next newest TCIS message. If none are left
    # catch the exception
    if { [catch {$dirHandle -prev} result] == 1 } {

        # No messages left
        puts "Didn't find the TCIS message containing SEQ=4579"
        $dirHandle close
        xmyExit
    }
}

# Found the message
puts "Found the message : [$dirHandle -data]"

$dirHandle close
```

The lines

```
set dirHandle [xmyMsgDir open -topcom "LFACS_1" -maxMsgs 250]
$dirHandle -marked MSG_TCIS2
```

can be combined into one line, as in

```
set dirHandle [xmyMsgDir open -topcom "LFACS_1" -maxMsgs 250\
    -marked MSG_TCIS2]
```

## 15.2 Match Tcl Extensions

The Application to Application Match extensions are used to determine whether received messages match specified criteria.

### 15.2.1 xmyMsgMatch

#### Syntax

```
xmyMsgMatch ?timeout? ?handle matchTclProc?
```

#### Returns

1 if a message was received and matched, 0 otherwise

#### Description

The **xmyMsgMatch** procedure is used to receive those messages from a connection that satisfy the user defined match criteria(s). The match criteria is defined within a Tcl procedure. The **xmyMsgMatch** procedure takes three arguments and will return 1 only if the given **matchTclProc** matches a message received over the given connection **handle** within the given timeout period.

The **matchTclProc** is the name of a user defined Tcl procedure which must return 1 if the message satisfies the match criteria and 0 otherwise. This user defined Tcl procedure must take the handle name as its only argument. The handle name is used to access the current received message to determine if that message matches the user criteria(s). Since the **matchTclProc** is called with each received message, it should be developed with performance considerations.

If **-1** is specified as the **xmyMsgMatch timeout** value, then the **\$handle -timeout** value will be used.

**timeout** is an integer specifying the number of seconds to wait for the desired message.

#### Example

```
> # Receive the printer message that  
> # Contains the text "Page 1"  
> # Define the User Tcl procedure to match this message  
> proc matchMyPrtResp { msgHandle } {  
    return [regexp "Page 1" [$msgHandle -data]]  
}
```

```
> # Create the connection to get the handle
> set msgHandle [xmyPrt3270 connect -printcom "myPrinter"]
> # Wait up to 60 seconds for the desired message
> if {[xmyMsgMatch 60 $msgHandle matchMyPrtResp] == 1} {
    # This is the file containing the desired message
    set myMsg [$msgHandle -file]
}
> $msgHandle disconnect
```

### Exceptions

- Missing or invalid arguments
- The user defined **matchTclProc** contains an error
- Exceptions associated to the handle's **receive** method

## 15.2.2 xmyMsgMatchUntil

### Syntax

```
xmyMsgMatchUntil timeout maxMsgs handle firstMatchTclProc \  
    untilMatchTclProc1 [untilMatchTclProc2 ...]
```

### Returns

1 if a message was received and matched, 0 otherwise

### Description

The **xmyMsgMatchUntil** procedure is used to receive a message that is sent in multiple pieces with known starting and ending pieces. The first (starting) piece of the message begins with the first received message which satisfies the match criteria in **firstMatchTclProc**. All subsequent received message are appended to the starting piece until all the **untilMatchTclProcs** are satisfied in the listed order. At least one **untilMatchProc** must be specified to match on the ending piece.

The **maxMsgs** argument value limits the number of messages appended together in the event **untilMatchTclProcs** never matches on an ending message. If the **maxMsgs** and **timeout** values are **-1**, then the **\$handle -maxMsgs** and **\$handle -timeout** values are used, respectively.

The **firstMatchTclProc** and **untilMatchTclProcs** are Tcl procedures provided by the user and they must return 1 if the message matches and 0 otherwise. These procedures must take the **handle** name as the only argument. The **handle** name is used to access the received message to determine if that message meets the match criteria. Since **firstMatchTclProc** is called with each initial message and the **untilMatchTclProcs** are called with subsequent messages, they should be developed with performance considerations.

### Example

```
# Match Pages 2 through 7 of a printer message assuming  
# each page arrives as a separate printer message  
  
# Define the Tcl procedure to match on the starting piece  
# which contains the text "Page 2"  
  
> proc matchFirst { handle } {  
    return [regexp "Page 2" [$handle -data]]  
}  
  
# Define the Tcl procedure to match on the ending piece  
# which contains the text "Page 7"  
  
> proc matchUntil { handle } {  
    return [regexp "Page 7" [$handle -data]]  
}
```

```
# Create printer connection and get the handle
> set handle [xmyPrt3270 connect -printcom "myPrinter"]

# wait up to 60 seconds to receive the message consisting of
# multiple received pieces (pages 2 through 7)
> if {[xmyMsgMatchUntil 60 10 $handle matchFirst \
      matchUntil] == 1} {
    # This is the file containing the messages (pages) I want
    set myMsg [$handle -file]
}
$handle disconnect
```

### Exceptions

- Missing or invalid arguments
- The user defined Tcl procedures contains an error
- Exceptions associated to the handle's receive method

### 15.2.3 xmyMsgMatchNext

#### Syntax

```
xmyMsgMatchNext timeout handle matchTclProc number
```

#### Returns

1 if a message was received and matched, 0 otherwise

#### Description

The **xmyMsgMatchNext** procedure is used to receive a message that is sent in multiple pieces with a known starting piece and number of subsequent pieces. The first piece of the message is the first received message that satisfies the match criteria defined in the **MatchTclProc**. The next number of received messages will be appended to the first piece.

The **matchTclProc** is the name of a user defined Tcl procedure which must return 1 if the message satisfies the match criteria and 0 otherwise. This user defined Tcl procedure must take the handle name as its only argument. The handle name is used to access the current received message to determine if that message matches the user criteria(s). Since the **matchTclProc** is called with each received message, it should be developed with performance considerations.

If **-1** is specified as the **xmyMsgMatch timeout** value, then the **\$handle -timeout** value will be used.

#### Example

```
# Receive the first 5 pages of a printer job assuming each
# page arrives as a separate message
# Define the User Tcl procedure to match page 1
> proc matchMyPrtResp { handle } {
    return [regexp "Page 1" [$handle -data]]
}
# Create the connection to get the handle
set handle [xmyPrt3270 connect -printcom "myPrinter"]
# Wait up to 60 seconds for the desired message
> if {[xmyMsgMatchNext 60 $handle matchMyPrtResp 4] == 1} {
    # This is the file containing pages 1 to 5
    set myMsg [$handle -file]
}
$handle disconnect
```

#### Exceptions

- Missing or invalid arguments
- The user defined Tcl procedures contains an error
- Exceptions associated with the handle's **receive** method

## 15.3 Marking/Unmarking Messages - xmyMsgMarkFile

### Syntax

```
xmyMsgMarkFile fileName markType ?flag?
```

### Returns

No result when `flag` is specified otherwise 1 if the message is marked and 0 if the message is not marked.

### Description

The **xmyMsgMarkFile** command is used to mark/unmark a message in the Message Response Directory. The message is identified by the name of the file containing it. The **markType** argument specifies the type of mark and the only valid value is currently `MSG_CLAIMED`. To mark the message the flag has to be 1, to unmark the message the flag has to be 0. If no flag is provided the command returns the current status of the file: 1 for marked and 0 for not marked.

### Example

Mark as claimed the last message that was received.

```
> set mark_file[$MSG_conn -file]
> xmyMsgMarkFile $mark_file APP_MSG_CLAIMED 1
```

### Exceptions

- Filename doesn't exist
- Filename is invalid



## 16. TCP App-to-App Tcl Language Extensions

The MYNAH TCP extension package provides functionality necessary for interactions with the SUT using the TCP/IP protocol.

### 16.1 Overview

The TCP extension package provides functionality to open connections to a SUT listening on a TCP socket. It can also listen on a TCP socket for accepting connections from a SUT. Thereafter messages can be sent and received until the connection is closed.

**NOTE** — The TCP extension package requires the presence of TCP/IP software on the MYNAH host.

Users can use the TCP Tcl extension package and Tcl language to develop test scripts to emulate an external application communicating with the application in the SUT.

**NOTE** — To access the TCP extension package you must first run **xmyLoadPkg TCP**.

The TCP extension package provides functionality to

- Make one or more logical connections to the SUT using a TCP/IP protocol.
- Accept a logical connection from a SUT using a TCP/IP protocol.
- Send and receive ASCII message or files to the SUT.
- Wait for and receive messages from the SUT, saving them as files in the Message Response Directory. Messages meant for this connection only or all messages (broadcast mode) can be received.
- Open and scan all received files saved in the Message Response Directory.
- Filter unwanted incoming messages using user-defined match procedures.
- Delete received messages.
- Disconnect from a TCP connection.

**NOTE** — See [Section 15](#) for information on the Message Response Directory extensions.

### 16.1.1 Methods Overview

Section 16.2.1 contains detailed descriptions of the TCP Method extensions. The extensions are in alphabetical order (within each category). Table 16-1 lists the extensions, organizing them in general functional categories. Table 16-1 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 16-1.** TCP Method Extensions

Category	Method	Description	Section
<b>Connection</b>	<b>accept</b>	Establishes a logical connection to the MYNAH collector and then waits to accept a connection from a client over TCP/IP network.	16.2.1.1, Page 16-5
	<b>connect</b>	Establishes a logical connection to the MYNAH collector and then a TCP connection to the destination host and port.	16.2.1.2, Page 16-7
	<b>disconnect</b>	Destroys a connection made through the <b>connect</b> method.	16.2.1.4, Page 16-10
<b>Data Entry/Retrieval</b>	<b>delete</b>	Deletes the specified message or all messages for the connection.	16.2.1.3, Page 16-9
	<b>receive</b>	Receives a message from the SUT using the TCP connection.	16.2.1.5, Page 16-11
	<b>send</b>	Sends a message to the SUT.	16.2.1.6, Page 16-13

## 16.1.2 Attributes Overview

Section 16.2.2 contains a detailed descriptions of the TCP Attribute extensions. The extensions are listed in alphabetical order (within each category). Table 16-2 lists the extensions, organizing them in general functional categories. Table 16-2 also gives a brief description of each extension and the section where the detailed description can be found.

**Table 16-2.** TCP Attribute Extensions (Sheet 1 of 2)

Category	Attribute	Description	Section
<b>Connection</b>	<b>-connections</b>	Lists the names of all active connections.	16.2.2.4, Page 16–19
	<b>-connId</b>	Returns a unique connection identifier.	16.2.2.5, Page 16–20
	<b>-host</b>	lets you create a connection to the given IP address	16.2.2.8, Page 16–23
	<b>-name</b>	Lets you choose the name of the connection.	16.2.2.12, Page 16–29
	<b>-port</b>	Allows a connection to the given port on the destination host	16.2.2.13, Page 16–30
<b>Data Entry/Retrieval</b>	<b>-append</b>	Instructs the <b>receive</b> operation to append a specified number of successfully received messages.	16.2.2.1, Page 16–15
	<b>-appName</b>	Specifies the name of the application.	16.2.2.2, Page 16–17
	<b>-broadcast</b>	Permits all the waiting scripts to receive any messages received by the Application SUT.	16.2.2.3, Page 16–18
	<b>-data</b>	Gets the message associated with the last <b>receive</b> method.	16.2.2.6, Page 16–21
	<b>-file</b>	Gets the name of the file containing the message associated with the last <b>receive</b> method.	16.2.2.7, Page 16–22
	<b>-maxMsgs</b>	Specifies the maximum number of messages that can be appended together by the <b>xmyMsgMatchUntil</b> procedure.	16.2.2.11, Page 16–28

**Table 16-2.** TCP Attribute Extensions (Sheet 2 of 2)

Category	Attribute	Description	Section
<b>Comparisons</b>	<b>-listen</b>	Returns or sets the listen mode used when receiving messages.	16.2.2.9, Page 16–24
	<b>-match</b>	Specifies a Tcl procedure name that will be invoked for each incoming message processed by the <b>receive</b> method.	16.2.2.10, Page 16–26
<b>Waiting</b>	<b>-timeout</b>	Sets the timeout for the <b>send</b> and <b>receive</b> operations.	16.2.2.20, Page 16–37
<b>Attribute</b>	<b>-recvStatus</b>	Returns the state of the <b>receive</b> session.	16.2.2.14, Page 16–31
	<b>-recvTime</b>	Returns the time stamp for the received message.	16.2.2.15, Page 16–32
	<b>-sendStatus</b>	Returns the state of the <b>send</b> session.	16.2.2.16, Page 16–33
	<b>-sendTime</b>	Returns the time the last message was successfully sent.	16.2.2.17, Page 16–34
	<b>-srcHost</b>	Returns the IP address of the source host whose connection request was accepted.	16.2.2.18, Page 16–35
	<b>-srcPort</b>	Returns the port on the source host whose connection request was accepted.	16.2.2.19, Page 16–36

## 16.2 xmyTcp Class

**xmyTcp** is the Tcl class command providing language extensions that are necessary for automated interactions with the SUT using the TCP application-to-application interface.

### 16.2.1 Methods

#### 16.2.1.1 accept

##### Syntax

```
xmyTcp accept -appName name ?-port port?  
             ?-broadcast? ?-listen listenOption?  
             ?-match matchProc? ?-maxMsgs maxMsgs? ?-name name?  
             ?-timeout timeout?
```

##### Returns

A handle name to the created TCP class instance.

##### Description

The **accept** method establishes a logical connection to the MYNAH collector and then waits to accept a connection from a client over TCP/IP network. It listens on the given port. Upon success, a handle to a connection is returned to the script. The attribute list provides the instance of **xmyTcp** class with initial values that will impact the configuration of this connection. Attribute values not supplied with the **accept** method will obtain their values from the **xmyTcp** class command. If the value is undefined in the **xmyTcp** class command or defined as the empty string, the corresponding value from the configuration file will be used.

This method waits until the timeout period. If no connections are received within the period, it will timeout.

**accept** takes the following attributes. These attributes are described in detail in subsequent sections.

- |                             |   |
|-----------------------------|---|
| <b>-appName</b> <i>name</i> | Specifies the name of the application as defined in the MYNAH configuration file.   |
| <b>-port</b> <i>port</i>    | Specifies the port on which the script should be listening. (See <a href="#">Section 16.2.2.13</a> .)   |
| <b>-broadcast</b>           | Specifies that each received message is sent to all the waiting scripts connected to the same application. (See <a href="#">Section 16.2.2.3</a> .) |

<b>-listen</b> <i>listenOption</i>	Specifies the <b>-listen</b> attribute that sets the time for the <b>receive</b> method. (See <a href="#">Section 16.2.2.9.</a> )
<b>-match</b> <i>matchProc</i>	Specifies the name of the Tcl procedure to be used for matching. (See <a href="#">Section 16.2.2.10.</a> )
<b>-maxMsgs</b> <i>maxMsgs</i>	Specifies the maximum number of messages that can be appended. (See <a href="#">Section 16.2.2.11.</a> )
<b>-name</b> <i>name</i>	Specifies the name of the handle which will be referenced later in the script. (See <a href="#">Section 16.2.2.12.</a> )
<b>-timeout</b> <i>timeout</i>	Specifies the number of seconds to wait before timing out (See <a href="#">Section 16.2.2.20.</a> )

### Example

```
set TCP_conn [xmyTcp accept -appName tcp_1 -port 7555]
```

### Exceptions

Unable to accept connection because

- **xmyCollector** process is not running or cannot be contacted
- *appName* is not defined in the *xmyConfig* file
- *appName* is not known to the xmyCollector process
- *appName* is not defined to use the TCP protocol
- timeout
- TCP error; a specific error message returned by TCP is also appended.

### 16.2.1.2 connect

#### Syntax

```
xmyTcp connect -appName name  
    ?-broadcast? ?-listen listenOption?  
    ?-match matchProc? ?-maxMsgs maxMsgs? ?-name name?  
    ?-host hostName? ?-port Port?  
    ?-timeout timeout?
```

#### Returns

A handle name to the created TCP class instance.

#### Description

The **connect** method establishes a logical connection to the MYNAH collector and then a TCP connection to the destination host and port from the MYNAH Tcl script. Upon success, a handle to a connection is returned to the script. The attribute list provides the instance of **xmyTcp** class with initial values that will impact the configuration of this connection. Attribute values not supplied with the connect method will obtain their values from the **xmyTcp** class command. If the value is undefined in the **xmyTcp** class command or defined as the empty string, the corresponding value from the configuration file will be used.

**connect** takes the following attributes. These attributes are described in detail in subsequent sections.

<b>-appName</b> <i>name</i>	Specifies the name of the application as defined in the MYNAH configuration file.
<b>-broadcast</b>	Indicates that each received message is sent to all of the waiting scripts connected to the same application. (See <a href="#">Section 16.2.2.3.</a> )
<b>-listen</b> <i>listenOption</i>	Specifies the <b>-listen</b> attribute that sets the time for <b>receive</b> method. (See <a href="#">Section 16.2.2.9.</a> )
<b>-match</b> <i>matchProc</i>	Specifies the name of the Tcl procedure to be used for matching. (See <a href="#">Section 16.2.2.10.</a> )
<b>-maxMsgs</b> <i>maxMsgs</i>	Specifies the maximum number of messages that can be appended. (See <a href="#">Section 16.2.2.11.</a> )
<b>-name</b> <i>name</i>	Specifies the name of the handle which will be referenced later in the script. (See <a href="#">Section 16.2.2.12.</a> )
<b>-host</b> <i>hostName</i>	Specifies the IP address of the destination host. (See <a href="#">Section 16.2.2.8.</a> )
<b>-port</b> <i>Port</i>	Specifies the port number on the destination host. (See <a href="#">Section 16.2.2.13.</a> )

**-timeout** *timeout* Specifies the time in seconds before script times out on receiving messages. (See [Section 16.2.2.20](#).)

### Example

```
> set TCP_conn [xmyTcp connect -appName tcp_1 \  
                -host 128.96.133.40 -port 25 ]
```

### Exceptions

Unable to establish the connection because

- **xmyCollector** process is not running or cannot be contacted
- *appName* is not defined in the *xmyConfig* file
- *appName* is not known to the xmyCollector process
- *appName* is not defined to use the TCP protocol
- timeout waiting for the connection back from the xmyCollector process
- TCP error; a specific error message returned by TCP is also appended.



### 16.2.1.3 delete

#### Syntax

```
handle delete -file fileName  
handle delete -file [handle -file]  
handle delete -all
```

#### Returns

No result

#### Description

The **delete** method deletes the specified message or all messages for the connection identified by the *handle*. The **-all** attribute is usually used before disconnecting the connection. The **-file** attribute uses a filename, which can be obtained by using the **receive** method's **-file** attribute.

#### Examples

```
$TCP_conn delete -file 854028294.63.2  
$TCP_conn delete -file [$TCP_conn -file]  
$TCP_conn delete -all
```

#### Exceptions

Unable to delete because the file does not exist.

#### 16.2.1.4 disconnect

##### Syntax

```
handle disconnect
```

##### Returns

No result

##### Description

The **disconnect** method destroys the logical connection to the given Application SUT made with the **xmyTcp connect** class method and identified by the *handle*. Once the disconnect call is made, the handle name associated with the connection is no longer valid and will produce a Tcl “Invalid command name” error message if used.

The message sub directory associated with the connection will be deleted if it is empty, i.e., if all the received messages have been deleted.

##### Example

```
$TCP_conn disconnect
```

##### Exceptions

Unable to disconnect because

- TCP error; a specific error message returned by TCP is also appended

### 16.2.1.5 receive

#### Syntax

```
handle receive ?-data? ?-file? ?-append? \  
?-listen listenOption? ?-timeout timeout?
```

#### Returns

The received message if the **-data** attribute is specified, the filename containing the received message if the **-file** attribute was specified, otherwise no result.

#### Description

The **receive** method receives a message from the SUT using the TCP connection established with the **connect** method and identified by *handle*. All messages received from the given Application SUT will be saved in the Message Response Directory. Depending on the listen mode (see **-listen**), the receive operation looks for messages present in the Message Response Directory and/or waits for a message to arrive.

If a Tcl match procedure is defined (see **-match**), only messages that satisfy the match procedure will be returned by the receive operation.

**NOTE** — A maximum of 4000 bytes can be received.

#### Attributes

The attributes such as **-append** are described in detail in subsequent sections.

#### Example

In this example, the script waits a maximum of 300 seconds to receive a message.

```
set message [ $TCP_conn receive -data -timeout 300 ]
```

#### Side Effects

If the **receive** method was successful, the internal receive time (see **-recvTime**) and receive message variables (**-data** or **-file**) will be updated.

#### Exceptions

Unable to receive a message because

- timeout occurred while waiting for a message to arrive
- invalid user-defined Tcl match procedure
- No messages have been received, but the **-append** attribute was specified
- No messages have been received, but the MSG\_LISTEN\_NEXT mode was specified
- Unable to save received message to disk

**NOTE** — The Message Response Directory must be writable by the MYNAH Message Collector process. It is recommended that the person starting Message Collector own both the Message Response Directory and the Message Collector processes.

- Invalid or missing attribute values
- Both the **-data** and **-file** attributes were specified

### 16.2.1.6 send

#### Syntax

```
handle send -data message
handle send -file filename
```

#### Returns

No result

#### Description

The **send** method sends a message to the SUT using the TCP connection established with the **connect** method and identified by *handle*.

The message to be sent can be defined within the Tcl script or in a file. In the first case, the **-data** attribute must be used and the message is provided as the attribute value.

**NOTE** — This message is treated like a string. If it contains backslash ('\') or other special characters they must be escaped with a backslash ('\').

In the second case, the **-file** attribute is used to specify the full path to a file containing the message.

**NOTE** — Since this file name is passed to the MYNAH Message Collector for transmitting, the Message Collector process must be able to open and read this file. When the Tcl script and Message Collector are running on different machines, the file system containing the file to be sent must be accessible (mounted) by both the machines.

#### Example

In this example, the script sends the string *\*sect{a=0;b=1;}%* to the handle *\$TCP\_conn*.

```
$TCP_conn send -data "*sect{a=0;b=1;}%"
```

In this example, send the string *\*tag=\1\2\3%*

```
$TCP_conn send -data "*tag=\1\2\3%"
```

In this example, send the file */mynah/scripts/Tcp/app\_1.send.01*

```
$TCP_conn send -file "/mynah/scripts/Tcp/app_1.send.01"
```

### Side Effects

If the **send** method is successful, the internal **send** time variable (see **-sendTime**) is updated.

### Exceptions

Unable to send the message because

- Application send session is down. See **-sendStatus** attribute.
- File is not accessible (if **-file** attribute was specified)
- Data message is too long, i.e., more than 2400 characters (if **-data** attribute was specified)
- TCP error. The specific TCP error message will be appended.

## 16.2.2 Attributes

Some of attributes are same as the ones defined for TOPCOM protocol. Instead of repeating the definition, a reference is made to TOPCOM. All the TOPCOM attributes are defined in [Section 12](#).

### 16.2.2.1 -append

#### Syntax

```
handle receive -append number
```

#### Returns

No result

#### Description

The **-append** attribute instructs the **receive** operation to append the next *number* of successfully received messages to the current received message before returning. The entire message will be accessible as the last received message.

The **-append** attribute is on a per receive basis and can only be specified with the **receive** method.

#### Example

This gets the first piece of a message sent in multiple pieces.

```
> $TCP_conn receive
```

Assume the first piece contains a number of subsequent pieces

```
regexp {(FRAGNUM=)([0-9]+)} [$TCP_conn -data] a b num
```

Receive and append the next pieces together with first piece

```
> $TCP_conn receive -append $num -listen MSG_LISTEN_NEXT
```

This is the entire message made of 1 + \$num pieces

```
> set myMsg [$TCP_conn -data]
```

#### Example

This gets the first piece of a message sent in multiple pieces. Assume that the last piece contains the keyword LAST

```
> $TCP_conn receive
```

Receive and append the next pieces until the message contains the LAST keyword.

```
> while {[regexp {LAST} [${TCP_conn -data}] == 0} {  
    ${TCP_conn} receive -append 1 -listen MSG_LISTEN_NEXT  
}
```

This is the entire message.

```
> set myMsg [${TCP_conn} -data]
```

### **Exceptions**

Invalid **-append** attribute value.



#### 16.2.2.2 -appName

##### **Syntax**

```
xmyTcp connect -appName
```

```
xmyTcp accept -appName
```

##### **Return**

No return

##### **Description**

Specifies the name of the application as defined in the *xmyConfig* file.

##### **Example**

```
set TCP_conn [xmyTcp accept -appName tcp_1]
```

### 16.2.2.3 -broadcast

#### Syntax

```
xmyTcp connect -broadcast  
handle -broadcast
```

#### Returns

The boolean value associated with the **-broadcast** attribute.

#### Description

The **-broadcast** attribute permits all the waiting scripts to receive any messages received by the Application SUT. It can be set at the time of connection. At other times, the value of this attribute can be retrieved, but not set.

#### Example

```
> $TCP_conn -broadcast
```

#### Exceptions

None

#### 16.2.2.4 -connections

##### Syntax

```
xmyTcp -connections
```

##### Returns

A blank separated list of active connection handle names (e.g., **.xmyTcp\_1**, **.xmyTcp\_2**, and **.xmyTcp\_4**), or the empty string if there are no active connections.

##### Description

The **-connections** attribute lists the names (**handle**) of all active (open) TCP connections. **-connections** can only be used through the **xmyTcp** class command.

##### Example

```
> xmyTcp -connections  
.xmyTcp_1 .xmyTcp_2 .xmyTcp_4
```

### 16.2.2.5 -connId

#### Syntax

```
handle -connId
```

#### Returns

The connection ID associated with the given handle.

#### Description

The **-connID** attribute returns the connection ID, which is a unique identifier associated with the given connection. It is uniquely generated and maintained by the MYNAH Collector process.

#### Example

```
> $TCP_conn -connId
```

#### Exceptions

None

### 16.2.2.6 -data

#### Syntax

```
handle -data  
handle receive -data
```

#### Returns

The message associated with the most recent receive operation, or the empty string if no messages has been received yet.

#### Description

The **-data** attribute is used to get the message associated with the last **receive** method. If **-data** is used with the **receive** method, the received data will be returned. If the **receive** method fails, an exception will occur and the previously received message will remain unchanged.

#### Example

This checks if string "ORD=56700;" is in last received message.

```
> set msg [ $TCP_conn -data ]  
> regexp {ORD=56700;} $msg
```

### 16.2.2.7 -file

#### Syntax

```
handle -file  
handle receive -file
```

#### Returns

The filename containing the message associated with the most recent **receive** operation, or the empty string if no messages have been received yet.

#### Description

The **-file** attribute retrieves the name of the file, stored in the Message Response Directory, containing the most recent received message. The filename should be saved in the Tcl script in order to access this data if additional messages will be received. Since the Message Response Directory is purged on a regular basis, the contents of this file should be copied to a user area if the message need to be saved.

If **-file** is used with the **receive** method, the received filename will be returned. If the **receive** method fails, an exception will occur and the previously received filename will remain unchanged.

#### Example

Read the file containing the last received message.

```
> set fd [open [${TCP_conn} -file] r]  
> set data [read $fd]  
> close $fd
```

### 16.2.2.8 -host

#### Syntax

```
xmyTcp connect -host  
handle -host
```

#### Returns

The IP address of the destination host.

#### Description

The **-host** attribute lets you create a connection to the given IP address. It can be set at the time of connection. At other times, the value of this attribute can be retrieved, but not set.

#### Example

```
> $TCP_conn -host
```

#### Exceptions

None

### 16.2.2.9 -listen

#### Syntax

```
xmyTcp -listen ?listenMode?  
xmyTcp connect -listen listenMode  
handle -listen ?listenMode?  
handle receive -listen listenMode
```

#### Returns

When no value is specified it returns the current listen mode, otherwise no result.

#### Description

The **-listen** attribute returns or sets the listen mode, which determines what messages will be considered by the **receive** method.

When no *listenMode* value is specified, **-listen** returns the current listen mode.

Only messages that have arrived **after** the listen time stamp will be considered by the **receive** operation. The valid **-listen** values are

- **MSG\_LISTEN\_NOW** will set the listen time stamp to the current time. Thus, **receive** will return messages that have arrived after the time the **receive** operation was executed. All messages that arrived prior to the receive operation will be ignored (but not removed from the Message Response Directory).
- **MSG\_LISTEN\_NEXT** will instruct **receive** to return the next message that arrived after the current received message. The listen time stamp will not be set. This mode is very useful for retrieving messages in sequence or messages that have arrived within the same second.
- **MSG\_LISTEN\_SEND** will set the listen time stamp to the time the most recent **send** operation was successfully executed. From a client point of view, we can assume that a reply (received message) to a request (sent message) cannot be received before the request itself is sent. On the other hand, if you are emulating the server side, then the receive must be performed first, so the **MSG\_LISTEN\_NOW** value should be used.
- An integer **time value** in UNIX format (i.e., seconds from 1/1/1970). The listen time stamp will be set to this given time, and messages that have arrived after this time will be considered.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is **MSG\_LISTEN\_NOW**.

**-listen** can be set in the *xmyConfig* file using the **ListenMode** parameter.



### Example

Send a request and wait up to 30 seconds for the reply.

```
> $TCP_conn send -data $request_1
> set reply_1 [ $TCP_conn receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

Send the second request.

```
> $TCP_conn send -data $request_2
> set reply_2 [ $TCP_conn receive -timeout 30 -listen \
MSG_LISTEN_SEND -data]
```

### Example

In this example, three **sends** are done before performing any receives, so that a certain degree of parallelism is achieved between the client and server. The **MSG\_LISTEN\_SEND** wouldn't work properly because the first and second replies will be lost if they arrive before the third **send** operation is performed. The **MSG\_LISTEN\_NOW** will also not work if the replies arrive before the receive operation is executed.

Send three different requests expecting three replies.

```
> $TCP_conn send -data $request_1
> set saveTime [ $TCP_conn -sendTime] # save 1st send time
> $TCP_conn send -data $request_2
> $TCP_conn send -data $request_3
```

Get the replies.

```
> set reply_1 [ $TCP_conn receive -data -listen $saveTime]
> set reply_2 [ $TCP_conn receive -data \
-listen MSG_LISTEN_NEXT]
> set reply_3 [ $TCP_conn receive -data \
-listen MSG_LISTEN_NEXT]
```

### Exceptions

Invalid listen mode was specified

### 16.2.2.10 -match

#### Syntax

```
xmyTcp -match ?matchTclProc?  
xmyTcp connect -match matchTclProc  
handle -match
```

#### Returns

When no value is specified, returns the name of the Tcl procedure used by the receive operation to match (filter) all incoming messages, otherwise no result.

#### Description

The **-match** attribute specifies a Tcl procedure name that will be invoked for each incoming message processed by the **receive** method. Messages that do not satisfy the Tcl **match** procedure will not be returned by the receive operation. By default a **match** procedure is not defined and all messages can be returned by the **receive** method.

**-match** is set on a per connection basis and is set through the **xmyTcp** class or by the **connect** method.

The user-defined Tcl **match** procedure must take the connection handle name as its only argument, and it returns a “1” when there is a match and “0” otherwise. Given the handle name, this match procedure can access the received data by using the **-data** attribute. Since this user-defined match procedure is invoked for each message processed by the receive operation, it must be developed with performance considerations.

The existence and validity of the user-defined Tcl match procedure will not be checked until the **receive** operation is executed.

**NOTE** — Even though Tcl supports defining procedures named “(”, “#”, and other punctuation and special symbols, you should *not* define your Tcl **match** procedures with these names. Instead, meaningful procedure names should always be used.

**-match** can be set in the *xmyConfig* file using the **MatchProcedure** parameter.

### Example

Receive only those messages containing “host=bluejays”.

```
> proc matchTclProc { $TCP_conn } {  
    return [regexp {host=bluejays} [$TCP_conn -data]]  
}  
set TCP_conn [xmyTcp connect -match matchTclProc ... ]
```

### Exceptions

An attempt is made to change the match procedure using the instance handle

### 16.2.2.11 -maxMsgs

#### Syntax

```
xmyTcp -maxMsgs ?number?  
xmyTcp connect -maxMsgs number  
handle -maxMsgs ?number?
```

#### Returns

When no value is specified, returns the current message limit, otherwise no result.

#### Description

The **-maxMsgs** attribute specifies the maximum number of messages that can be appended together by the **xmyMsgMatchUntil** procedure. This parameter limits the number of messages appended before the until match conditions are satisfied.

If this attribute is not set by the Tcl script or *xmyConfig* file, the default value is 10.

**-maxMsgs** can be set in the *xmyConfig* file using the **MaxMsgs** parameter.

#### Exceptions

An invalid **maxMsgs** value is specified.

#### Example

```
> $TCP_conn -maxMsgs 25
```

### 16.2.2.12 -name

#### Syntax

```
xmyTcp connect -name connectionName  
handle -name
```

#### Returns

When no value is specified, returns the connection handle name set by the **connect** operation.

#### Description

The **-name** attribute lets you choose the name of the connection rather than having a name internally generated by the **connect** method.

The **-name** attribute is on a per connection basis and the value is set through the **connect** method.

#### Example

Create a connection named *my\_connection*.

```
> xmyTcp connect -name my_connection ...
```

#### Exceptions

- A connection with the same name already exists
- An attempt is made to change the connection name using the instance handle

### 16.2.2.13 -port

#### Syntax

```
xmyTcp connect -port  
handle -port
```

#### Returns

The port on the destination host.

#### Description

The **port** attribute allows a connection to the given port on the destination host. It can be set at the time of connection. At other times, the value of this attribute can be retrieved, but not set.

#### Example

```
> $TCP_conn -port
```

#### Exceptions

None

#### 16.2.2.14 -recvStatus

##### Syntax

```
handleName -recvStatus
```

##### Returns

The value *UP* if the connection is open, *DOWN* if the connection is closed.

##### Description

The state of the receive connection between the MYNAH System and the TCP SUT application. *UP* is returned only if the MYNAH System is able to receive messages from the TCP SUT application. Even though the receive status is *DOWN*, the receive method may still be successful if the messages have already arrived and has stored in the Message Response Directory.

##### Example

```
> $handle -recvStatus
```

### 16.2.2.15 -recvTime

#### Syntax

```
handle -recvTime
```

#### Returns

The time stamp in UNIX format (i.e., seconds since 1/1/1970) associated with the most recent received message, or 0 if no messages have been received.

#### Description

The **-recvTime** attribute returns the time stamp for the received message. All messages received from the SUT are stamped with the time the message was received by the MYNAH Collector process.

#### Example

```
> $TCP_conn receive  
> set rtime [$TCP_conn -recvTime]
```



#### 16.2.2.16 -sendStatus

##### **Syntax**

```
handleName -sendStatus
```

##### **Returns**

The value *UP* if the connection is open, *DOWN* if the connection is closed.

##### **Description**

The state of the send connection between the MYNAH System and the TCP SUT application. *UP* is returned only if the MYNAH System is able to send messages to the TCP SUT application.

##### **Example**

```
$handle -sendStatus
```

### 16.2.2.17 -sendTime

#### Syntax

```
handle -sendTime
```

#### Returns

The time stamp in UNIX format (i.e., seconds since 1/1/1970) associated with the most recent sent message, or 0.000000 if no messages have been sent.

#### Description

The **-sendTime** attribute returns the time the last message was successfully sent over the connection.

#### Example

```
> $TCP_conn1 -sendTime
```

#### 16.2.2.18 -srcHost

##### Syntax

```
handle -srcHost
```

##### Returns

The IP address of the source host whose connection request was accepted.

##### Description

The **-srcHost** attribute returns the IP address of the source host whose connection request was accepted by an **accept** method in the script. This can be retrieved only after an **accept** method has been executed successfully.

##### Example

```
> $TCP_conn -srcHost
```

##### Exceptions

None

### 16.2.2.19 -srcPort

#### Syntax

```
handle -srcPort
```

#### Returns

The port on the source host whose connection request was accepted.

#### Description

The **-srcPort** attribute returns the port on the source host whose connection request was accepted by an **accept** method in the script. This can be retrieved only after an **accept** method has been executed successfully.

#### Example

```
> $TCP_conn -srcPort
```

#### Exceptions

None

#### 16.2.2.20 -timeout

##### Syntax

```
xmyTcp -timeout ?timeoutValue?  
xmyTcp connect -timeout timeoutValue  
handle -timeout ?timeoutValue?  
handle send -timeout timeoutValue  
handle receive -timeout timeoutValue
```

##### Returns

When no value is specified it returns the current timeout value, otherwise no result.

##### Description

The **-timeout** attribute sets the timeout for the **send** and **receive** operations. For the send operation, the timeout is the number of seconds to wait for acknowledgment of the sent message. If the timeout expires, the **send** operation will fail. For the **receive** operation, the timeout is the number of seconds to wait for a message to arrive. If the timeout expires, the receive operation will fail.

If a timeout value was not specified at connect time, the value in the configuration file for the particular protocol handler will be used. The timeout value can be changed for the connection instance, or changed for each individual send or receive operation.

**-timeout** can be set in the *xmyConfig* file using the **Timeout** parameter.

##### Example

Create a connection setting the timeout to five minutes.

```
> set TCP_conn [xmyTcp connect -timeout 300 ]
```

The following **receive** waits at most five minutes

```
> $TCP_conn receive
```

The following **receive** waits at most ten minutes

```
> $TCP_conn -timeout 600  
> $TCP_conn receive
```

The following **receive** waits at most one minute

```
> $TCP_conn receive -timeout 60
```

The following **receive** waits at most ten minutes

```
> $TCP_conn receive
```

## 16.3 Example

```
# This script communicates with the web server which runs
# as a TCP/IP based application on port 80.

set st1 [xmyDate]

xmyLoadPkg Tcp

xmyTcp -match ""
xmyTcp connect -appName tcp_1 -host "www.bellcore.com" -port 80 \
             -name a1 -timeout 10

set c1 [a1 -connId]
set listenValue MSG_LISTEN_SEND
set i 1

a1 send -data "HEAD / HTTP/1.0\n\n"
set m1 [a1 receive -data -listen $listenValue]
set t1 [regexp {^HTTP/1.0 200 OK} $m1]
xmyCompare -expr {$t1=="1"}

a1 delete -all
a1 disconnect

puts "good comp = $xmyVar(GoodCompares)"
puts "fail comp = $xmyVar(FailedCompares)"

# This script communicates with the mail server that runs
# as a TCP/IP based application on port 25.

xmyTcp connect -appName tcp_1 -host broccoli.bae -port 25 \
             -name a1 -timeout 10

a1 -listen 0

set m1 [a1 receive -data ]

set t1 [regexp {^220} $m1]
xmyCompare -expr {$t1=="1"}

# Sometimes, the mail server sends back more than one line of
# message. In such cases, this loop will flush out the entire
# message.

set t1 0
while {$t1 == 0} {
```

---

```
        set t1 [catch {a1 receive -data -listen MSG_LISTEN_NEXT\  
                      -timeout 5} err]  
    }  
  
set listenValue MSG_LISTEN_NEXT  
  
a1 send -data "HELO selene.base.bellcore.com\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {pleased to meet you} $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 send -data "NOOP This is a harmless test service.\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {200 OK} $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 send -data "WIZ\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {500 Command unrecognized} $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 send -data "DEBUG\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {500 Command unrecognized} $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 send -data "vrfy decode\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {250 } $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 send -data "QUIT\r\n"  
set m1 [a1 receive -data -listen $listenValue]  
set t1 [regexp {^221} $m1]  
xmyCompare -expr {$t1=="1"}  
  
a1 delete -all  
a1 disconnect  
  
puts "good comp = $xmyVar(GoodCompares)"  
puts "fail comp = $xmyVar(FailedCompares)"  
  
if {$xmyVar(FailedCompares) == 0} {  
    puts "Test passed"  
} else {  
    puts "Test failed"  
}  
}
```

```
set st2 [expr [xmyDate] - $st1]
puts "execution time = $st2 secs"
```



## 17. Batch Tcl Language Extensions

This system design describes MYNAH tools that permit the user to

1. Submit JCL, stored in a UNIX file, to a user-selected MVS host machine for batch execution
2. Optionally edit the JCL to dynamically change JCL parameters
3. Query the host system to determine the status of that batch job
4. Retrieve the JES output of batch jobs
5. Retrieve batch job condition codes
6. Delete batch jobs from the output queue and any temporary files that were created by these tools on Unix.

The designed solution provides batch submission via Tcl.

**NOTE** — The MYNAH Batch Tcl extensions are implemented as Tcl procedures.

### 17.1 Accessing The Batch Procedures

Access to the batch procedure will be provided via the SE. You do not need to use the Tcl **source** statement to access the batch procedure.

### 17.2 Submitting a Batch Job - `batch_submit`

#### Syntax

```
batch_submit -file jclfile -host hostname \  
             -starting_string string -ending_string string \  
             ?-edit {from_string to_string}? ?-timeout seconds?
```

#### Returns

A Tcl keyed list. This keyed list must be saved to a variable for subsequent batch procedures.

On failure an exception is thrown.

#### Description

The **batch\_submit** procedure is used to submit a single batch job for processing. **batch\_submit** attempts to submit the JCL contained in the user-specified file to the user-specified host after optionally editing the JCL if the user provided edits.

**batch\_submit** returns a Tcl keyed list that subsequent MYNAH automated batch job procedures require to perform processing on the batch job. The keyed list returned from each successful batch job submitted via **batch\_submit** *must* be stored into its own variable. The keyed list is used later to determine if the job was submitted successfully, to determine the status of the batch job (i.e., the job is in the input queue, the job is active, or the job is in the JES output queue), to retrieve the JES output of the batch job, and to retrieve individual batch job step results.

More than one batch job may be submitted from a single Tcl script such that batch jobs can execute in parallel on the MVS machine, provided system resources are available and the batch job names are different. Note that a job name is an MVS user id plus an optional suffix. The suffix may be changed to submit multiple jobs to run in parallel.

**batch\_submit** takes the following options:

- file *jclfile*** The name of the *required* file that contains the JCL to be processed be passed on the command line. The full path to the file must be specified.
- host *hostname*** The name of the host machine where the JCL will be processed. The host machine name must be in the *.netrc* file of the UNIX machine submitting the batch job.
- starting\_string *string*** The *starting* string is a unique string that is found on the line immediately proceeding the job STEP information.  
**batch\_submit** *requires* a starting string and ending string to locate STEP results in the JES output. The starting and ending strings must not contain a hyphen.
- ending\_string *string*** The *ending* string is a unique string that is found on the line immediately after the job STEP information.  
**batch\_submit** *requires* a starting string and ending string to locate STEP results in the JES output. The starting and ending strings must not contain a hyphen.
- edit {*from\_string to\_string*}** This identifies a two element Tcl list containing *from* and *to* strings. The *from* string will be searched for in the JCL and, if found, replaced by the *to* string in a copy of the user's JCL. The **-edit** attribute and its associated *from* and *to* strings are optional. Edits are in the form **-edit {*from to*}**. If more than one edit is necessary, the **-edit** attribute and associated two element list may be repeated.

**-timeout seconds**

This identifies the time limit that a job will be waited for when the **batch\_wait** procedure is executed. The **-timeout** attribute and its associated value in seconds are optional. If a timeout value is not specified a default value of 600 seconds is used.

**Example**

The following Tcl script statement demonstrates submitting a JCL stored in a UNIX file called `/u/jcl` to a host machine called **pyibm2**, the editing of a copy of the JCL to change the programmer name from `<PGRM>` to `LP`, the job name from `<JOB>` to `TKTEE66`, and the job class from `<CLASS>` to `X`, and storing of the keyed list into a variable called **job\_list**:

```
> set job_list [ batch_submit -file /u/jcl \  
    -host pyibm2 \  
    -starting_string {BELLCORE JOB SUMM} \  
    -ending_string -edit  
    {"<JOB>"} "TKTEEGG" {ENDED} \  
    -edit {"<NAME>" "LP"} -edit {"<CLASS>" "X"} ]
```

The JCL stored in the file called `/u/jcl` for the above example Tcl script statement could have appeared as follows:

```
//<JOB>X JOB (5,T531), ' <PGRM> ', CLASS=<CLASS>, MSGCLASS=F  
/*ROUTE PRINT RRCDP1  
//STEP01 EXEC PGM=IEBGENER  
//SYSPRINT DD SYSOUT=*  
//SYSUT1DD *  
HI WORLD  
//SYSUT2 DD SYSOUT=(*)  
//SYSIN DD DUMMY
```

**NOTE** — In the above, **MSGCLASS** must be set to *F* to route output to the buffer.

The preceding **batch\_submit** edits the user-provided JCL and places the edited output into a temporary file under `/tmp`. The original JCL file is *not* changed.

The host name must be a name that exists in the `.netrc` file of the UNIX machine submitting the batch job. (See [Section 17.4](#) for information on the `.netrc` file. A suffix may be added.

The editing performed by the preceding **batch\_submit** in the example Tcl script statement would change the programmer name from `<PGRM>` to `LP`, the job name from `<JOB>` to `TKTEE66`, and the job class from `<CLASS>` to `X` for previously shown sample JCL.

**batch\_submit** submits the edited JCL by logging onto the user-specified MVS host machine via the **ftp** command and submitting the JCL.

### Exceptions

This method will fail (throw an exception) for the following conditions:

- Problem with **-file**
    - **-file** must have a value
    - **-file *file\_name*** does not exist
    - **-file *file\_name*** is not readable
    - **-file *file\_name*** is empty
  - Problem with **-host**
    - **-host** must have a value
    - environment variable HOME not defined
    - file *\$HOME/.netrc* does not exist
    - file *\$HOME/.netrc* is not readable
    - file *\$HOME/.netrc* is empty
    - host *hostname* not in *\$HOME/.netrc*
  - Problem with **-edit**

Edit must be of the form **-edit {*from\_string to\_string*}**
  - Problem with **-starting\_string**

**-starting\_string** must have a non-null value
  - Problem with **-ending\_string**

**-ending\_string** must have a non-null value
  - Problem with **-timeout**

**-timeout** must have positive integer value
  - The **ftp** command failed.

ftp command failed
  - Incorrect usage

Usage = `batch_submit -file jclfile \  
-host hostname -starting_string string \  
-ending_string string ?-timeout seconds? \  
?-edit {from to}?`
-

## 17.3 Methods

Just as the other MYNAH extension packages use methods (sub-commands to class commands that perform actions on handles you create) the Batch package has procedures that perform actions on the Tcl keyed lists you create using **batch\_submit**. For the sake of continuity, we will also refer to these procedures as methods as well as procedures.

The general syntax of these methods/procedures is

```
procedure job_list arguments
```

### 17.3.1 batch\_delete

#### Syntax

```
batch_delete job_list
```

#### Description

The **batch\_delete** procedure/method lets you free spooled files associated with a batch job. Its important to remove the spooled files to save space and to improve the performance of the MYNAH batch processing since the **ftp** command that **batch\_submit** and **batch\_wait** use are affected by the number of spooled files.

#### Example

```
> set job_list [ batch_submit -file "/home/my_jcl" \  
    -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
    -ending_string {ENDED} -timeout 600 ]
```

This waits up to ten minutes for the batch job to complete.

```
> set job_status [ batch_wait job_list ]
```

Delete the batch job's JES output.

```
> if { $job_status == "OUTPUT" } {  
    batch_delete job_list  
}
```

#### Exceptions

**batch\_delete** will handle errors by generating a Tcl exception.

- Missing **job\_list**

No value given for parameter **job\_list** to **batch\_delete**

- The **ftp** command failed.

ftp command failed

- The JOB was not found  
JOB NOT FOUND
- The JOB was already deleted  
JOB '*job\_name*' already deleted

### 17.3.2 batch\_host

#### Syntax

```
batch_host job_list
```

#### Returns

```
hostname
```

#### Description

The **batch\_host** procedure/method lets you query for the name of the host machine. **batch\_host** requires the keyed list generated by **batch\_submit**.

#### Example

```
> set job_list [ batch_submit -file "/home/my_jcl" \  
    -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
    -ending_string {ENDED} -timeout 600 ]
```

Determine the host name of the batch job.

```
> set host_name [ batch_host job_list ]  
> puts "host name is $host_name"
```

#### Exceptions

**batch\_host** will generate a Tcl exception if there is a missing **job\_list** (i.e., no value given for parameter **job\_list** to **batch\_host**.)

### 17.3.3 batch\_jobid

#### Syntax

```
batch_jobid job_list
```

#### Returns

JOB##### if successful and where ##### is the job id assigned by the host

#### Description

The **batch\_jobid** procedure/method lets you query for the job id assigned to a batch job by the IBM mainframe. **batch\_jobid** requires the keyed list generated by **batch\_submit**.

#### Example

```
> set job_list [ batch_submit -file "/home/my_jcl" \  
                -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
                -ending_string {ENDED} -timeout 600 ]
```

Determine the name of the batch job.

```
> set job_id [ batch_jobid job_list ]  
> puts "the job id is $job_id"
```

#### Exceptions

**batch\_jobid** will generate a Tcl exception if there is a missing **job\_list** (i.e., no value given for parameter **job\_list** to **batch\_jobid**.)



### 17.3.4 batch\_status

#### Syntax

```
batch_status job_list
```

#### Returns

INPUT, ACTIVE, or OUTPUT

#### Description

The **batch\_status** procedure/method lets you query the IBM mainframe to determine the status of a batch job. **batch\_status** requires the keyed list generated by **batch\_submit**.

If a batch job has completed, **batch\_status** will retrieve a copy of the JES listing segment of the job and extract the condition code lines from the listing for subsequent batch job analysis.

#### Example

```
> set job_list [ batch_submit -file "/home/my_jcl" \  
    -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
    -ending_string {ENDED} -timeout 600 ]
```

Determine the status of the batch job.

```
> set job_status [ batch_status job_list ]  
> if { $job_status == "INPUT" } {  
    puts "Job is queued for execution"  
} elseif { $job_status == "ACTIVE" } {  
    puts "Job is active"  
} else { $job_status == "OUTPUT" } {  
    puts "Job is complete"  
}
```

#### Exceptions

**batch\_status** will generate a Tcl exception under the following conditions:

- Missing **job\_list**

No value given for parameter **job\_list** to **batch\_status**

- The **ftp** command failed.

ftp command failed

### 17.3.5 batch\_step\_count

#### Syntax

```
batch_step_count job_list
```

#### Returns

Number of steps in batch job

#### Description

The **batch\_step\_count** procedure/method lets you query for the number of steps reported in a batch job. **batch\_step\_count** requires the keyed list generated by **batch\_submit**.

#### Example

```
> set job_list [ batch_submit -file "/home/my_jcl" \  
    -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
    -ending_string {ENDED} -timeout 600 ]
```

Wait up to ten minutes for the batch job to complete

```
> set job_status [ batch_wait job_list ]
```

Get the results if the job complete and determine the number of steps reported in this batch job.

```
> if { $job_status == "OUTPUT" } {  
    set steps = batch_step_count job_list  
    puts "this job had $steps reported"  
}
```

#### Exceptions

**batch\_step\_count** will generate a Tcl exception if there is a missing **job\_list** (i.e., no value given for parameter **job\_list** to **batch\_step\_count**.)

### 17.3.6 batch\_step\_result

#### Syntax

```
batch_step_result job_list step_number
```

#### Returns

Result string from JES if step exists

Null string if step does not exist

#### Description

The **batch\_step\_result** procedure/method lets you query for the condition code associated with a user-specified *step number* of a completed batch job.

**batch\_step\_result** requires the keyed list generated by **batch\_submit**.

**batch\_step\_result** can only obtain step results after a **batch\_status** or **batch\_wait** has indicated that the batch job has completed. The following are examples of step results that might be returned:

```
CONDITION CODE: 0000 IEBCGENR  
SYSTEM ABEND: 0806 IEBCGENR
```

## Example

```
set job_list [ batch_submit -file "/home/my_jcl" \  
    -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
    -ending_string {ENDED} -timeout 600 ]  
  
#  
# wait up to 10 minutes for the batch job to complete  
set job_status [ batch_status job_list ]  
#  
# get the results if the job completed  
#  
if { $job_status == "OUTPUT" } {  
#  
# determine the number of steps in the batch job  
#  
    set step_count [ batch_step_result job_list ]  
#  
# get the step result of each step of the job  
#  
    for { set step 1 } { $step <= step_count } \  
        { incr step +1 } {  
  
        set step_result [batch_step_result job_list $step]  
  
        if { $step_result == "" } {  
            puts "$step, No results"  
        } else {  
            puts "$step, $step_result"  
        }  
  
    }  
  
}
```

## Exceptions

**batch\_step\_result** will generate a Tcl exception under the following conditions:

- Missing **job\_list**

No value given for parameter **job\_list** to **batch\_step\_result**

- The batch job has not completed.

batch job '*job*' status is '*status*'

- The step number is not found

Key "<step#>" is not found in the keyed list

### 17.3.7 batch\_wait

#### Syntax

```
batch_wait job_list
```

#### Returns

INPUT, ACTIVE, or OUTPUT

#### Description

The **batch\_wait** procedure/method lets you wait up to a user-defined time in seconds for a batch job to reach a job status of **OUTPUT**. If the batch job completes prior to the user-defined wait time, **batch\_wait** will return with a result of **OUTPUT** prior to the wait time elapsing. If the batch job does not complete prior to the user-defined wait time, the method will return the current status of the job after the user-defined time has elapsed. If the user does not supply a time to wait, a default of 0 seconds will be used.

If a batch job has completed, **batch\_wait** will retrieve a copy of the JES listing segment of the job and extract the condition code lines from the listing for subsequent batch job analysis. **batch\_wait** uses the starting string and ending string defined by **batch\_submit** to locate the condition codes.

#### Example

```
set job_list [ batch_submit -file "/home/my_jcl" \  
                -host "pyibm2" -starting_string {BELLCORE JOB SUMM} \  
                -ending_string {ENDED} -timeout 600 ]  
  
#  
# wait up to 10 minutes for the batch job to complete  
#  
set job_status [ batch_wait job_list ]  
#  
# what was the status  
#  
if { $job_status == "INPUT" } {  
    puts "Job is queued for execution"  
} elseif { $job_status == "ACTIVE" } {  
    puts "Job is active"  
} elseif { $job_status == "OUTPUT" } {  
    puts "Job is complete"  
}
```

## Exceptions

**batch\_wait** will generate a Tcl exception under the following conditions:

- Missing **job\_list**

No value given for parameter **job\_list** to **batch\_step\_count**

- The **ftp** command failed.

ftp command failed

## 17.4 The .netrc file

The SE used to process batch jobs must have a *.netrc* file in its \$HOME directory. The *.netrc* file must have permissions of 0600 (read and write by owner) for the user-id executing the SE.

The *.netrc* file must contain the following for each machine and login to be used:

```
machine <machine_name> login <login> password <password>
```

## 18. DCE Extension Package

This DCE Extension Package provides the functions necessary for interactions with a Distributed Computing Environment (DCE) client or server. Unlike the other MYNAH packages, the DCE scripting language is not available directly from MYNAH. Instead, DCE scripting is available from an external application-specific emulated client or server executable, which the MYNAH Administrator must build, as described in Section 11 of the *MYNAH System Administration Guide*.

Users may use the emulated client or server independently of MYNAH, or they may automate their use from MYNAH with the ASYNC package. The MYNAH installation includes several Tcl routines that use the ASYNC package to automate the execution of DCE scripts and verify their outputs (e.g., **xmyDceStartClient**, **xmyDceStartServer**. See [Section 18.4](#)).

The documentation in this chapter describes the DCE scripting language available in the emulated client and server executables.

[Table 18-1](#) contains brief descriptions of the contents of each subsection in this section.

**Table 18-1.** MYNAH DCE Extension Sections

Section Name	Description	Section Number
DCE Overview	This section contains a basic discussion on DCE.	<a href="#">18.1</a> , <a href="#">Page 18–2</a>
Overview of Scripting	This section provides basics on creating DCE scripts.	<a href="#">18.3</a> , <a href="#">Page 18–4</a>
Using the Emulated Client and Emulated Server in MYNAH System	This section describes how to use the emulated client and emulated server executables to test DCE applications.	<a href="#">18.4</a> , <a href="#">Page 18–5</a>
Interface Object	This section contains the Tcl extensions for working with an interface object.	<a href="#">18.5</a> , <a href="#">Page 18–11</a>
IDL Types	This section contains the Tcl extensions for working with Interface Description Language (IDL) files.	<a href="#">18.6</a> , <a href="#">Page 18–14</a>
RPC Calls in the Emulated Client	This section contains scripting information on working with RPC Calls in the Emulated Client.	<a href="#">18.7</a> , <a href="#">Page 18–69</a>
RPC Calls in the Emulated Server	This section contains scripting information on working with RPC Calls in the Emulated Server.	<a href="#">18.10</a> , <a href="#">Page 18–72</a>

**Table 18-1.** MYNAH DCE Extension Sections

Section Name	Description	Section Number
Constants	This section contains information on the Tcl created constant for the interface.	<a href="#">18.11,</a> <a href="#">Page 18–73</a>
Destroying Objects	This section contains information on destroying interface objects.	<a href="#">18.12,</a> <a href="#">Page 18–74</a>
Deleting Handles and Objects	This section contains information on deleting DCE handles.	<a href="#">18.13,</a> <a href="#">Page 18–75</a>

## 18.1 DCE Overview

This section provides you with a high-level understanding of DCE. It is not meant to be a complete tutorial on DCE.

### 18.1.1 DCE Architecture

DCE provides distributed application programming in the form of the **client-server** model. In this model, a **server** is an application that provides a **service**. A **client**, on the other hand, is an application that requests a server to perform some service on its behalf.

Specifically, DCE uses the **Remote Procedure Call** (RPC) mechanism to accomplish client-server processing. Using RPCs, the client calls a procedure that appears to be a local procedure. In reality, the procedure that is really invoked is one that is defined in a server application.

The RPCs that a client can call (and that a server must provide) are defined in the interface.

### 18.1.2 Interface Definition

The interface provides the cohesion between client and server, defining the operations that a client may call and that a server must provide. Since an operation may take data as input and may produce data as output, the interface must also define the what this data looks like.

The interface itself is defined by a set of **Interface Description Language** (IDL) files. Collectively, the IDL files define the operations the client may call and all data types into and out of the operations.



### 18.1.3 IDL File

An IDL file resembles a C header file. In fact, the syntax of the IDL file is based on the syntax for C declarations.

Within the IDL file you will find type definitions and operation declarations. Type definitions resemble the C **typedef** syntax. Operation declarations resemble ANSI C procedure declarations with the addition of annotations on each procedure parameter. These annotations determine the data flow (client to server, server to client, or both) for each parameter.

## 18.2 Developing a DCE Application

The steps in developing an application depend on whether the application will be a client or a server. Both routes start the same: the interface must be defined.

### 18.2.1 DCE Client Development

Once the interface is defined, the interface must be compiled (using the **idl** tool) to produce client stubs and an interface header file. These stubs define local procedures that resemble the operations defined in the interface. When the client application calls one of these local procedures, the DCE library forwards the request to the server for execution of the actual procedure.

The interface header file is `#include`'d by other source files in the client application. The header file provides C prototypes for the operations defined in the interface, as well as C versions of the type definitions.

The client application must be linked with the generated client stubs and with the DCE runtime libraries.

### 18.2.2 DCE Server Development

In the server side, the interface must also be compiled. This time it produces server stubs in addition to the interface header file. These stubs provide the necessary hooks so that as a request comes in, DCE can invoke the correct server procedure.

The developer must implement the RPC operations defined in the interface. This entails writing C procedures for each operation.

Analogous to the client application, the server application must be linked with the generated server stubs and the DCE runtime library.

## 18.3 Overview of Scripting

Before you begin, the MYNAH administrator must build emulated clients and servers.

The emulated client is essentially an interactive Tcl interpreter with additional commands in support of the DCE domain.

The emulated server is also an interactive Tcl interpreter, but it is more complex than the emulated client due to the fact that DCE is in control instead of the Tcl interpreter. DCE only turns control over to Tcl temporarily when a DCE request comes in.

Once the emulated clients and servers have been built, you can then use them to test DCE applications. [Section 18.4](#) describe the commands used to start the emulated clients and servers.

In the following language overview, the following conventions will be used:

<i>hData</i>	Handle to any data item
<i>hStruct</i>	Handle to a structure
<i>hUnion</i>	Handle to a union
<i>hEnum</i>	Handle to an enum
<i>hInterface</i>	Handle to an interface
<i>hPointer</i>	Handle to a pointer.

### 18.3.1 Emulated Client

Using an emulated client, you interact with a real DCE server by

1. Connecting to a server
2. Creating input data
3. Creating holders for output data
4. Calling the rpc
5. Verifying output values.

### 18.3.2 Emulated Server

Using an emulated server, you interact with a real DCE client by

1. Starting the emulated server, providing a script containing definitions for all RPCs
2. Exercising client application (using other domain extensions)

## 18.4 Using the Emulated Client and Emulated Server in MYNAH System

This section describes how to use the emulated client and emulated server executables to test DCE applications within in the MYNAH System framework.

### 18.4.1 Overview

Using the methods presented below, you may write MYNAH scripts that start an emulated client or emulated server process, and capture all output from each operation that is executed. This captured output is compared against a baselined image, which updates the compares for the MYNAH script.

### 18.4.2 Using the Emulated Client

The following methods are used to start an emulated client.

#### 18.4.2.1 xmyDceStartClient

```
xmyDceStartClient \  
    -user dce-user \  
    -password dce-password \  
    -dir directory \  
    -entry CDS-entry \  
    -script client-script
```

#### Returns

The asynchronous connection handle on which the DCE emulated client is run

#### Description

The **xmyDceStartClient** method first logs into DCE using *dce-user* and *dce-password*. It then starts the emulated client executable found in *directory/client*. The client uses the CDS entry *CDS-entry* for communicating with the server. The client runs the DCE script *directory/client-script*.

The name of each output file is *dce.client.opname.sequence-number*, where *opname* is the name of the operation and *sequence-number* is incremented for each operation that is executed. The baseline images used for comparison are found in the directory *directory/baselined.images*.

**xmyDceStartClient** should be followed by the **xmyDceWaitForClient** command.

## Exceptions

Asynchronous connection exceptions

### Example

```
> set clientConn [xmyDceStartClient \  
-user "ksb" \  
-password "mm_dce" \  
-dir "/u/dce-stuff/tcl-dce/unit-tests/testing"\  
-entry "../test/locnet/empty-g" \  
-script "empty-client-stubs.tcl" \  
]
```

#### 18.4.2.2 xmyDceWaitForClient

```
xmyDceWaitForClient connectionHandle
```

##### Returns

An empty string

##### Description

The **xmyDceWaitForClient** method waits for output from the emulated client running on *connectionHandle*. As it receives output, it compares the new output against the baselined output in *directory/baselined.images*. The comparison is made using the **xmyDiff** command, which updates the compares for the running MYNAH script.

##### Exceptions

Asynchronous connection exceptions

##### Example

```
> xmyDceWaitForClient $clientConn
```

### 18.4.3 Using the Emulated Server

The following methods are used to start an emulated server.

#### 18.4.3.1 xmyDceStartServer

```
xmyDceStartServer \  
-user dce-user \  
-password dce-password \  
-dir directory \  
-entry CDS-entry \  
-script server-script \  
?-timeout timeout?
```

#### Returns

The asynchronous connection handle on which the DCE emulated server is run

#### Description

The **xmyDceStartServer** method first logs into DCE using *dce-user* and *dce-password*. Then it starts the emulated server executable found in *directory/server*. The server creates an entry in the group entry at *CDS-entry* for communicating with the client; it also creates an entry for the server using *CDS-entry.host.pid*. The server runs the DCE script *directory/server-script*. If the timeout parameter is provided, and is non-zero, it represents the amount of time (in minutes) that the server should be allowed to run.

The name of each output file is *dce.server.opname.sequence-number*, where *opname* is the name of the operation and *sequence-number* is incremented for each operation that is executed. The baseline images used for comparison are found in the directory *directory/baselined.images*.

**xmyDceStartServer** should be followed by the **xmyDceWaitForServer** command.

#### Exceptions

Asynchronous connection exceptions

#### Example

```
> set serverConn [xmyDceStartServer \  
-user "ksb" \  
-password "mm_dce" \  
-dir "/u/dce-stuff/tcl-dce/unit-tests/testing" \  
-entry " ./test/locnet/empty-g" \  
-script "empty-server-stubs.tcl" \  
-timeout 5 \  
]
```

### 18.4.3.2 xmyDceWaitForServer

`xmyDceWaitForServer connectionHandle`

#### Returns

An empty string

#### Description

The **xmyDceWaitForServer** method waits for output from the emulated server running on *connectionHandle*. As it receives output, it compares the new output against the baselined output in *directory/baselined.images*. The comparison is made using the **xmyDiff** command, which updates the compares for the running MYNAH script.

#### Exceptions

Asynchronous connection exceptions

#### Example

```
> xmyDceWaitForServer $serverConn
```

## 18.4.4 Using the Emulated Server for Starting a Long-Running Server

Test scripts may use the **xmyDceStartIndependentServer** method to bring up a long-running emulated server process. This method does not perform any comparisons on the outputs.

### 18.4.4.1 xmyDceStartIndependentServer

```
xmyDceStartIndependentServer \  
    -user dce-user \  
    -password dce-password \  
    -dir directory \  
    -entry CDS-entry \  
    -script server-script \  
    -log logFile
```

#### Returns

The process id of the emulated server process

#### Description

The **xmyDceStartIndependentServer** method behaves like **xmyDceStartServer**, however, it creates a long-running server that runs in the background. Therefore, no comparisons are made against baselined outputs. Instead, all output from the server executable is dumped into the log file given by *logFile*.

#### Exceptions

Asynchronous connection exceptions

#### Example

```
> xmyDceStartIndependentServer \  
    -user "ksb" \  
    -password "mm_dce" \  
    -dir "/u/dce-stuff/tcl-dce/unit-tests/testing" \  
    -entry "/./test/locnet/empty-g" \  
    -script "empty-server-stubs.tcl" \  
    -log "iserver.log"
```



## 18.5 Interface Object

The interface is available at runtime through a handle. The name of the handle is based on the name of the interface: **interface-name**. This handle may be used to determine information about the interface at script execution time.

There is only one method, **info**, which takes an argument noting the information that is being queried.

### 18.5.1 name

```
hInterface info name
```

#### Returns

The name of the interface

#### Description

The **name** argument returns the name of the interface from the interface definition.

### 18.5.2 uuid

```
hInterface info uuid
```

#### Returns

The UUID of the interface

#### Description

The **uuid** argument returns the unique identifier of the interface from the interface definition.

### 18.5.3 major-version

```
hInterface info major-version
```

#### Returns

The major version number of the interface

#### Description

The **major-version** argument returns the major version of the interface from the interface definition.

#### 18.5.4 minor-version

```
hInterface info minor-version
```

##### Returns

the minor version number of the interface

##### Description

The **minor-version** argument returns the minor version of the interface from the interface definition.

#### 18.5.5 isClient

```
hInterface info isClient
```

##### Returns

1 if the interface is in an emulated client, 0 otherwise

##### Description

The **isClient** argument determines at runtime if the interface is running in an emulated client or emulated server.

#### 18.5.6 isServer

```
hInterface info isServer
```

##### Returns

1 if the interface is in an emulated server, 0 otherwise

##### Description

The **isServer** argument determines at runtime if the interface is running in an emulated client or emulated server.

### 18.5.7 constants

*hInterface* info constants

#### Returns

The list of all constants defined in the interface

#### Description

The **constants** argument returns a list of all constants defined in the interface.

### 18.5.8 types

*hInterface* info types

#### Returns

The list of all types defined in the interface

#### Description

The **constants** argument returns a list of all types defined in the interface.

### 18.5.9 rpcs

*hInterface* info rpcs

#### Returns

The list of all operations defined in the interface

#### Description

The **rpcs** argument returns a list of all operations defined in the interface.

## 18.6 IDL Types

There are three categories of IDL types methods in the DCE Package:

- Intrinsic**      These are data instances that are the basic building blocks, the foundation pieces on which the IDLs are created.
- Aggregates**    These are data instances that contain other data instances. Their bindings mimic their underlying data layout; the binding contains other bindings. These are all are user-defined types. They can be implemented by using **array** and **pointer** types. Since these constructs are used frequently and would require more Tcl-level manipulations, the fake types were created to mask some of the hassle involved in accessing the types.
- DCE Types**     These are data instances that do not exist as independent types in the DCE specification. The generic interface for these types are presented later. The specific interface depends on the definition of the user-defined type.

Table 18-2 lists the DCE IDL type extensions, organizing them into the categories listed above.

**Table 18-2.** DCE IDL Type Extensions (Sheet 1 of 3)

Category	Method	Description	Section
<b>Intrinsic</b>	<b>bool</b>	Creates a boolean object.	18.6.2, Page 18–19
	<b>byte</b>	Creates a byte object.	18.6.4, Page 18–23
	<b>char</b>	Creates a character (ASCII) object.	18.6.5, Page 18–25
	<b>double</b>	Creates a double (64-bit floating point number) object.	18.6.6, Page 18–27
	<b>enumerations</b>	Creates an enumeration object, which contains a set of symbolic constants	18.6.7, Page 18–29
	<b>error_status_t</b>	Creates an error_status_t object, which is an enumerated type used to contain DCE error codes.	18.6.8, Page 18–31
	<b>float</b>	Creates a float object, which is an 32-bit floating point number.	18.6.9, Page 18–33
	<b>handle_t</b>	Creates a handle_t object, which represents a connection to a server.	18.6.10, Page 18–35

**Table 18-2. DCE IDL Type Extensions (Sheet 2 of 3)**

Category	Method	Description	Section
	<b>hyper</b>	Creates a hyper object, which is an 64-bit signed integer from $-2^{63}$ to $2^{63}-1$ .	<a href="#">18.6.11, Page 18-40</a>
	<b>long</b>	Creates a long object, which is a 32-bit signed integer from $-2^{31}$ to $2^{31}-1$ .	<a href="#">18.6.12, Page 18-42</a>
	<b>pointer</b>	Creates a pointer object, which is an indirect reference to another object.	<a href="#">18.6.14, Page 18-47</a>
	<b>short</b>	Creates a short object, which is a 16-bit signed integer from -32768 to 32767.	<a href="#">18.6.15, Page 18-50</a>
	<b>small</b>	Creates a small object, which is an 8-bit signed integer from -128 to 127	<a href="#">18.6.16, Page 18-52</a>
	<b>uhyper</b>	Creates an unsigned hyper object, which is an 64-bit unsigned integer from 0 to $2^{64}-1$ .	<a href="#">18.6.19, Page 18-58</a>
	<b>ulong</b>	Creates an unsigned long object, which is an 32-bit unsigned integer from 0 to $2^{32}-1$ .	<a href="#">18.6.20, Page 18-60</a>
	<b>ushort</b>	Creates an unsigned short object, which is an 16-bit unsigned integer from 0 to 65535.	<a href="#">18.6.22, Page 18-65</a>
	<b>usmall</b>	Creates an unsigned small object, which is an 8-bit unsigned integer from 0 to 255.	<a href="#">18.6.23, Page 18-67</a>
<b>Aggregates</b>	<b>array</b>	Creates an array object, which is an ordered series of objects.	<a href="#">18.6.1, Page 18-17</a>
	<b>pipe</b>	Creates a pipe object.	<a href="#">18.6.13, Page 18-44</a>
	<b>structure</b>	Creates a structure object, which is a group of related objects.	<a href="#">18.6.18, Page 18-56</a>
	<b>union</b>	Creates a character object. discriminating unions	<a href="#">18.6.21, Page 18-62</a>

**Table 18-2.** DCE IDL Type Extensions (Sheet 3 of 3)

Category	Method	Description	Section
Special Types	<b>buffer</b>	Creates a buffer object.	<a href="#">18.6.3,</a> <a href="#">Page 18–21</a>
	<b>string</b>	Creates a string object.	<a href="#">18.6.17,</a> <a href="#">Page 18–54</a>

All IDL extensions have a “contstructor” method that creates the handle to the IDL. The constructor takes the form **make-*idlname***, where *idlname* is the name of the IDL type.

In addition, the Intrinsic and DCE Types have **set** and **get** methods, which, respectively, let you set and return the values of the handle to the IDL.

## 18.6.1 array

An array is an ordered sequence of objects. This describes the interface to a generic enumerated type.

There is no method for creating a generic array object. However, if a **typedef** exists defining a new type name for an array (with a fixed size), you can create an instance of that particular array.

### 18.6.1.1 make-array Constructor

#### Syntax

```
make-array
```

#### Returns

A handle to the newly created array object.

#### Description

Creates an array object and returns a handle to the object.

#### Exceptions

Out of memory

### 18.6.1.2 elements Method

#### Syntax

```
hArray elements
```

#### Returns

Handles to all the array elements.

#### Description

Returns the handles of all the elements in the array.

### 18.6.1.3 index Method

#### Syntax

```
hArray index ?method args?
```

#### Returns

The result of applying *method* to the object at *index* in the array.

#### Description

Invokes *method* and *args* on the object at the *index* position in the array. If *method* is not given, returns the handle of the object at that position.

#### Example

```
> set a [make-xbbMsgOutput_t]
> $a elements
.xmyDceBinding0 .xmyDceBinding1 .xmyDceBinding2
> $e 0 type get
the-type
```

#### Exceptions

- Index is out of range
- Can't apply *method* and/or *args* to element object



## 18.6.2 bool

A bool is an boolean value. It has two values: **TRUE** and **FALSE**.

### 18.6.2.1 make-bool Constructor

#### Syntax

```
make-bool ?initial-value?
```

#### Returns

A handle to the newly created bool object.

#### Description

Creates a bool object and returns a handle to the bool.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.2.2 get Method

#### Syntax

```
hBool get
```

#### Returns

**TRUE** or **FALSE**

#### Description

Returns the state of the boolean value as either **TRUE** or **FALSE**.

### 18.6.2.3 set Method

#### Syntax

```
hBool set newValue
```

#### Returns

Empty string

#### Description

Sets the value of the bool based on *newValue*, which can be **1**, **TRUE**, **ON**, or **YES** for TRUE values or **0**, **FALSE**, **OFF**, or **NO** for FALSE values.

#### Example

```
> set b [make-bool]
> $b set TRUE
> $b get
TRUE
```

#### Exceptions

Illegal value for *newValue*

### 18.6.3 buffer

A buffer is a null-terminated ASCII character sequence, which has a fixed-size array of characters reserved for it.

#### 18.6.3.1 make-buffer Constructor

##### Syntax

```
make-buffer length ?initial-value?
```

##### Returns

A handle to the newly created buffer object.

##### Description

Creates a buffer object and returns a handle to the buffer. The size of the buffer is given by the *length* parameter.

##### Exceptions

Out of memory

#### 18.6.3.2 get Method

##### Syntax

```
hBuffer get
```

##### Returns

A string.

##### Description

Returns the string stored in the buffer.

### 18.6.3.3 set Method

#### Syntax

```
hBuffer set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the buffer object represented by *hBuffer*. If *newValue* is longer than the buffer allows, the string is truncated.

#### Example

```
> set s [make-buffer 10]
> $s set {abcdefghijklmnop}
> $s get
abcdefghijklmnopki
```

### 18.6.3.4 length Method

```
hBuffer length
```

#### Returns

the length of the buffer

#### Description

Returns the size of the largest string that can be stored in the buffer.

#### Example

```
> set s [make-buffer 10]
> $s set {abcdefghijklmnop}
> $s length
10
```

## 18.6.4 byte

A byte is an 8-bit unsigned integer. It can contain the values from 0 to 255.

### 18.6.4.1 make-byte Constructor

#### Syntax

```
make-byte ?initial-value?
```

#### Returns

A handle to the newly created byte object.

#### Description

Creates a byte object and returns a handle to the byte.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.4.2 get Method

#### Syntax

```
hByte get
```

#### Returns

A number between 0 and 255.

#### Description

Returns the stored number.

### 18.6.4.3 set Method

#### Syntax

```
hByte set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the byte object represented by *hByte*.

#### Example

```
> set b [make-byte]  
> $b set 255  
> $b get  
255
```

#### Exceptions

Illegal value for number

## 18.6.5 char

A **char** is an 8-bit unsigned integer, like the byte type. It can contain the values from 0 to 255. It is treated as an ASCII character.

### 18.6.5.1 make-char Constructor

#### Syntax

```
make-char ?initial-value?
```

#### Returns

A handle to the newly created char object.

#### Description

Creates a char object and returns a handle to the char.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.5.2 get Method

#### Syntax

```
hChar get
```

#### Returns

The ASCII character stored in the char.

#### Description

Returns the character stored.

### 18.6.5.3 set Method

#### Syntax

```
hChar set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the char object represented by *hChar*.

#### Example

```
> set ch [make-char]  
> $ch set c  
> $ch get  
c
```

#### Exceptions

Illegal character



## 18.6.6 double

A double is an 64-bit floating point number.

### 18.6.6.1 make-double Constructor

#### Syntax

```
make-double ?initial-value?
```

#### Returns

A handle to the newly created double object.

#### Description

Creates a double object and returns a handle to the double.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.6.2 get Method

#### Syntax

```
hDouble get
```

#### Returns

A floating point number.

#### Description

Returns the stored number.

### 18.6.6.3 set Method

#### Syntax

```
hDouble set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the double object represented by *hDouble*.

#### Example

```
> set f [make-double]  
> $f set 3.14159265  
> $f get  
3.14159265
```

#### Exceptions

Illegal value for number

## 18.6.7 enumeration

An enumeration is a type that contains a set of symbolic constants, each associated with a distinct value. This describes the interface to a generic enumerated type.

### 18.6.7.1 make-enum Constructor

#### Syntax

```
make-enum ?initial-value?
```

#### Returns

A handle to the newly created enumeration object.

#### Description

Creates an enumerated type object and returns a handle to the object.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.7.2 get Method

#### Syntax

```
hEnum get
```

#### Returns

The symbolic representation of the value.

#### Description

Returns the value of the enumerated type in symbolic representation.

### 18.6.7.3 set Method

#### Syntax

```
hEnum set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the enumerated type object represented by *hEnum*.

#### Example

```
> set e [make-xbbTraceLevel_e]  
> $e set idl_TRACE_0  
> $e get  
idl_TRACE_0
```

#### Exceptions

Illegal value

### 18.6.7.4 values Method

#### Syntax

```
hEnum values
```

#### Returns

The list of all allowed values.

#### Description

Returns the list of all legal values of the enumerated type in symbolic representation.

## 18.6.8 error\_status\_t

An `error_status_t` is an enumerated type used to contain DCE error codes. Refer to the DCE references for the allowed values. It is implemented as an enumerated type, and supports the standard enumeration methods (see Section 18.6.7).

There are currently 273 valid values for `error_status_t`. The most important one is `rpc_s_okay`, which is used to represent a successful RPC call.

### 18.6.8.1 make-error\_status\_t Constructor

#### Syntax

```
make-error_status_t ?initial-value?
```

#### Returns

A handle to the newly created `error_status_t` object.

#### Description

Creates an `error_status_t` object and returns a handle to the object.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.8.2 get Method

#### Syntax

```
hErrorStatusT get
```

#### Returns

The symbolic representation of the value.

#### Description

Returns the value of the `error_status_t` in symbolic representation.

### 18.6.8.3 set Method

*hErrorStatusT* set *newValue*

#### Returns

#### Syntax

Empty string

#### Description

Stores *newValue* into the error\_status\_t object represented by *hErrorStatusT*.

#### Example

```
> set e [make-error_status_t]
> $e set rpc_s_not_listening
> $e get
rpc_s_not_listening
```

#### Exceptions

Illegal value

### 18.6.8.4 values Method

#### Syntax

*hErrorStatusT* values

#### Returns

The list of all allowed values.

#### Description

Returns the list of all legal values of the error\_status\_t in symbolic representation.

## 18.6.9 float

A float is an 32-bit floating point number.

### 18.6.9.1 make-float Constructor

#### Syntax

```
make-float ?initial-value?
```

#### Returns

A handle to the newly created float object.

#### Description

Creates a float object and returns a handle to the float.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.9.2 get Method

#### Syntax

```
hFloat get
```

#### Returns

A floating point number.

#### Description

Returns the stored number.

### 18.6.9.3 set Method

#### Syntax

```
hFloat set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the float object represented by *hFloat*.

#### Example

```
> set f [make-float]  
> $f set 3.14159265  
> $f get  
3.14159265
```

#### Exceptions

Illegal value for number



### 18.6.10 handle\_t

A handle\_t represents a connection to a server. In DCE, this is also known as an **rpc\_binding\_handle\_t**.

#### 18.6.10.1 make-handle\_t Constructor

##### Syntax

```
make-handle_t
```

##### Returns

A handle to the newly created handle\_t object.

##### Description

Creates a handle\_t object and returns a handle to the handle\_t object.

##### Exceptions

Out of memory

#### 18.6.10.2 make uuid\_t Constructor

##### Syntax

```
make-uuid_t ?initialValue?
```

##### Returns

A handle to the newly created uuid\_t object.

##### Description

Creates a uuid\_t object and returns a handle to it. If specified, initialValue is used as the value of the object; otherwise a new UUID value is created.

##### Exceptions

If initialValue is "" or "NULL", the value of the object is the NULL UUID.

### 18.6.10.3 get Method

#### **Syntax**

*hHandle\_t* get

#### **Returns**

The id of the handle.

#### **Description**

Returns the id of the handle\_t object.

### 18.6.10.4 get Method

#### **Syntax**

*hUuid* get

#### **Returns**

Returns the value of the UUID object.

#### 18.6.10.5 set Method

##### Syntax

```
hHandle_t set newValue
```

##### Returns

Empty string

##### Description

Stores *newValue* into the *handle\_t* object represented by *hHandle\_t*.

#### 18.6.10.6 set Method

##### Syntax

```
hUuid_t set newValue
```

##### Returns

Empty string

##### Description

Sets the value of the ZUUID object to *newValue*. If new Value is "" or "NULL", sets the value of the object to the NULL UUID value.

##### Example

```
> set u [make- uuid]  
> u get  
=> 8a781e06-f3d6-11d0-83e6-80606abaaa77  
> u set NULL  
> u get
```

#### 18.6.10.7 bind Method

##### Syntax

```
hHandle_t bind CDSentry
```

##### Returns

Empty string

##### Description

Binds the *handle\_t* object to the server represented by *CDSentry*. *CDSentry* is either a server or a group entry in the Cell Directory Service (CDS).

### Example

```
> set handle [make-handle_t]
> $handle bind ./test/locnet/adv-group
```

### Exceptions

CDS entry does not exist

### 18.6.10.8 setAuthentication Method

#### Syntax

```
hHandle_t setAuthentication protection authenticationService \  
    authorizationService
```

#### Returns

Empty string

#### Description

Sets the authentication of the *handle\_t* object.

The **bind** member function must be called prior to calling this method.

*protection* is the protection level, which can be one of **default**, **none**, **connect**, **call**, **pkt**, **pkt\_integ**, or **pkt\_privacy**. The default value is **default**.

*authenticationService* is the authentication service code, which can be one of **none**, **dce\_secret**, **dce\_public**, and **default**. The default value is **default**.

*authorizationService* is the authorization service code, which can be one of **none**, **name**, or **dce**. The default value is **none**.

#### Example

```
> set handle [make-handle_t]  
> $handle bind ./test/locnet/adv-group  
> $handle setAuthentication pkt_privacy dce_public dce
```

#### Exceptions

Bind has not been called

## 18.6.11 hyper

A hyper is an 64-bit signed integer. It can contain the values from  $-2^{63}$  to  $2^{63}-1$ . Since Tcl does not support 64-bit integers, the Tcl interface uses two 32-bit hexadecimal integers to represent the hyper value. The pair of integers is in high-word, low-word format.

### 18.6.11.1 make-hyper Constructor

#### Syntax

```
make-hyper ?initial-value?
```

#### Returns

A handle to the newly created hyper object.

#### Description

Creates a hyper object and returns a handle to the hyper.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.11.2 get Method

#### Syntax

```
hHyper get
```

#### Returns

The pair of hexadecimal numbers representing the hyper integer.

#### Description

Returns the stored number.

### 18.6.11.3 set Method

#### Syntax

```
hHyper set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the hyper object represented by *hHyper*. *newValue* must be a pair of hexadecimal integers.

#### Example

```
> set i [make-hyper]  
> $i set {0000 0005}  
> $i get  
0000 0005
```

#### Exceptions

Illegal value for number

## 18.6.12 long

A long is an 32-bit signed integer. It can contain the values from  $-2^{31}$  to  $2^{31}-1$ .

### 18.6.12.1 make-long Constructor

#### Syntax

```
make-long ?initial-value?
```

#### Returns

A handle to the newly created long.

#### Description

Creates a long object and returns a handle to the long.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.12.2 get Method

#### Syntax

```
hLong get
```

#### Returns

A number between  $-2^{31}$  to  $2^{31}-1$ .

#### Description

Returns the stored number.



### 18.6.12.3 set Method

#### Syntax

```
hLong set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the long object represented by *hLong*.

#### Example

```
> set i [make-long]
> $i set 5
> $i get
5
```

#### Exceptions

Illegal value for number

### 18.6.13 pipe

A **pipe** is type that allows a large volume of data to be transferred from the client to the server or vice versa. This describes the interface to a generic enumerated type.

This implementation of pipes uses files as the source and sink for the transfer of pipe data. There are two different sets of operations based on whether the pipe is used in an emulated client or an emulated server. Note also that there are two methods for each side of the transfer: one for an input pipe and another for an output pipe. If a pipe is bidirectional (ie, transfers both input and output data), both methods are available.

#### 18.6.13.1 *make-pipe* Constructor

##### Syntax

```
make-pipe
```

##### Returns

A handle to the newly created pipe object.

##### Description

Creates a pipe object and returns a handle to the object.

##### Exceptions

Out of memory

#### 18.6.13.2 *setInputFilename* Method

##### Syntax

```
hPipe setInputFilename filename
```

##### Returns

Empty string

##### Description

The **setInputFilename** method sets the source for an input pipe. It is only available to the client emulator. This method is a setup step. The file is not opened until an RPC that uses the pipe is called.

If the file can not be created, a DCE runtime exception will be thrown.

### 18.6.13.3 setOutputFilename Method

#### Syntax

```
hPipe setOutputFilename filename
```

#### Returns

Empty string

#### Description

The **setOutputFilename** method sets the sink for an output pipe. It is only available to the client emulator. This method is a setup step. The file is not opened until an RPC that uses the pipe is called.

If the file can not be opened, a DCE runtime exception will be thrown.

### 18.6.13.4 dumpFile Method

#### Syntax

```
hPipe dumpFile filename
```

#### Returns

Empty string

#### Description

The **dumpFile** method reads the data from the input pipe and dumps it to the file. It is used by the emulated server.

Unlike the client methods, this method reads the data from the pipe and stores it in the file immediately.

#### Exceptions

Output file, *filename*, can not be created

### 18.6.13.5 readFile Method

#### Syntax

```
hPipe readFile filename
```

#### Returns

Empty string

#### Description

The **readFile** method reads the data from the file and sends it to the output pipe. It is used by the emulated server.

Unlike the client methods, this method opens the file immediately.

#### Exceptions

Input file, *filename*, does not exist

## 18.6.14 pointer

A pointer is an indirect reference to another object. Whereas in **C**, a pointer has a specific type, these pointers are generic. There is no type checking performed on the values being stored in a pointer. The string **NULL** is used to denote a NULL pointer.

### 18.6.14.1 make-pointer Constructor

#### Syntax

```
make-pointer ?initial-value?
```

#### Returns

A handle to the newly created pointer object.

#### Description

Creates a pointer object and returns a handle to the pointer. If *initialValue* is specified, it is the handle to another object — the object to which the pointer is pointing.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.14.2 get Method

#### Syntax

```
hPointer get
```

#### Returns

The handle of the object to which the pointer is pointing.

#### Description

Returns the target object or **NULL** if the object is not pointing to another object.

### 18.6.14.3 set Method

#### Syntax

```
hPointer set newValue
```

#### Returns

Empty string

#### Description

Makes the pointer point to the object associated with *newValue*.

#### Exceptions

- Pointer points to **NULL**
- Illegal value

### 18.6.14.4 -> (dereference) Method

#### Syntax

```
hPointer -> method args
```

#### Returns

The result of invoking *method* on the object being pointed to.

#### Description

Dereferences the pointer object and invokes the specified method (*method*) on the dereferenced object with the associated arguments (*args*).

#### Example

```
> set p [make-pointer]
> set f [make-float 3.14159265]
> $p set $f
> $p -> get
3.14159265
> $p -> set 0.0
> $f get
0.0
```

#### Exceptions

- Pointer points to **NULL**
- *method* and/or *args* does not apply to dereferenced object

#### 18.6.14.5 get-pointer-contents Method

##### **Syntax**

```
hPointer get-pointer-contents
```

##### **Returns**

The address stored in the real pointer.

##### **Description**

Returns the address that is stored in the real pointer, not the name of the handle associated with that object. This method is provided for debugging purposes.

## 18.6.15 short

A short is an 16-bit signed integer. It can contain the values from -32768 to 32767.

### 18.6.15.1 make-short Constructor

#### Syntax

```
make-short ?initial-value?
```

#### Returns

A handle to the newly created short object.

#### Description

Creates a short object and returns a handle to the short.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.15.2 get Method

#### Syntax

```
hShort get
```

#### Returns

A number between -32768 and 32767.

#### Description

Returns the stored number.



### 18.6.15.3 set Method

#### Syntax

```
hShort set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the short object represented by *hShort*.

#### Example

```
> set i [make-short]  
> $i set 5  
> $i get  
5
```

#### Exceptions

Illegal value for number

## 18.6.16 small

A small is an 8-bit signed integer. It can contain the values from -128 to 127.

### 18.6.16.1 make-small Constructor

#### Syntax

```
make-small ?initial-value?
```

#### Returns

A handle to the newly created small object.

#### Description

Creates a small object and returns a handle to the small.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.16.2 get Method

#### Syntax

```
hSmall get
```

#### Returns

A number between -128 and 127.

#### Description

Returns the stored number.

### 18.6.16.3 set Method

#### Syntax

```
hSmall set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the small object represented by *hSmall*.

#### Example

```
> set i [make-small]
> $i set 5
> $i get
5
```

#### Exceptions

Illegal value for number

## 18.6.17 string

A string is an null-terminated ASCII character sequence.

### 18.6.17.1 make-string Constructor

#### Syntax

```
make-string ?initial-value?
```

#### Returns

A handle to the newly created string object.

#### Description

Creates a string object and returns a handle to the string.

#### Exceptions

Out of memory

### 18.6.17.2 get Method

#### Syntax

```
hString get
```

#### Returns

A string.

#### Description

Returns the stored string.

### 18.6.17.3 set Method

#### Syntax

```
hString set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the string object represented by *hString*.

#### Example

```
> set s [make-string]
> $s set {abcdefg hijklmnop}
> $s get
abcdefg kijklmnop
```

## 18.6.18 structure

A structure is a user-defined type that is a group of related data objects. This describes the interface to a generic structure.

There are two constructors available: one for structures that contain a conformant array and one for structures without a conformant array. A conformant array is an array with a size determined at runtime. The second constructor is provided to set this runtime size.

**WARNING** — A structure object defines a method called *members*, which is used to return the names of all the structure's members. This method overrides an actual member named *members*. Therefore, do not use a structure member named *members*.

### 18.6.18.1 make-struct Constructor

#### Syntax

```
make-struct
```

#### Returns

A handle to the newly created structure object.

#### Description

Creates an structure object and returns a handle to the object.

#### Exceptions

Out of memory

### 18.6.18.2 make-struct Constructor Containing a Conformant Array

#### Syntax

```
make-struct size
```

#### Returns

A handle to the newly created structure.

#### Description

Creates an structure object and returns a handle to the object. This is used for structures that contain a conformant array. The size parameter determines the number of elements in the conformant array.

## Exceptions

Out of memory

### 18.6.18.3 members Method

#### Syntax

```
hStruct members
```

#### Returns

The names of all members of the structure.

#### Description

Returns a list of the names of the members of the structure.

### 18.6.18.4 memberName Method

#### Syntax

```
hStruct memberName ?method args?
```

#### Returns

The result of applying *method* to the member given by *memberName*.

#### Description

Retrieves the member of the structure using *memberName*. Invokes *method* and *args* on this member. If *method* is not given, this returns the name of the member object.

#### Example

```
> set envTrace [make-xbbHdr_t]
> $envTrace trace set idl_TRACE_A
> $envTrace log set idl_LOG_LVL2
> $envTrace trace get
idl_TRACE_A
> $envTrace log get
idl_LOG_LVL2
```

#### Exceptions

- No member with name *memberName*
- Can't apply *method* and/or *args* to member object

## 18.6.19 uhyper

A uhyper is an 64-bit unsigned integer. It can contain the values from 0 to  $2^{64}-1$ . Like its signed counterpart, access to the integer is achieved through a pair of high and low words.

### 18.6.19.1 make-uhyper Constructor

#### Syntax

```
make-uhyper ?initial-value?
```

#### Returns

A handle to the newly created uhyper object.

#### Description

Creates an uhyper object and returns a handle to the uhyper.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.19.2 get Method

#### Syntax

```
hUhyper get
```

#### Returns

The pair of hexadecimal numbers representing the uhyper integer.

#### Description

Returns the stored number.



### 18.6.19.3 set Method

#### Syntax

```
hUhyper set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the uhyper object represented by *hUhyper*. *newValue* must be a pair of hexadecimal integers.

#### Example

```
> set i [make-uhyper]  
> $i set {0000 0005}  
> $i get  
0000 0005
```

#### Exceptions

Illegal value for number

## 18.6.20 `ulong`

A `ulong` is an 32-bit unsigned integer. It can contain the values from 0 to  $2^{32}-1$ .

### 18.6.20.1 `make-ulong` Constructor

#### Syntax

```
make-ulong ?initial-value?
```

#### Returns

A handle to the newly created `ulong` object.

#### Description

Creates a long object and returns a handle to the `ulong`.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.20.2 `get` Method

#### Syntax

```
hUlong get
```

#### Returns

A number between 0 and  $2^{32}-1$ .

#### Description

Returns the stored number.

### 18.6.20.3 set Method

#### Syntax

```
hUlong set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the ulong object represented by *hUlong*.

#### Example

```
> set i [make-ulong]  
> $i set 5  
> $i get  
5
```

#### Exceptions

Illegal value for number

## 18.6.21 union

A union is a user-defined type, much like a structure. However, all members shared the same memory, so only one member is valid at any given time. A union has an additional member, known as the discriminant, which is valid at all times. The discriminant is the key that determines which of the other members is valid. In order to access a member, that member must first be valid.

This describes the interface to a generic union.

**WARNING** — A union object defines a method called *members*, which is used to return the names of all the union's members. This method overrides an actual member named *members*. Therefore, do not use a union member named *members*.

### 18.6.21.1 make-union Constructor

#### Syntax

```
make-union
```

#### Returns

A handle to the newly created union object.

#### Description

Creates a union object and returns a handle to the object.

#### Exceptions

Out of memory

### 18.6.21.2 members Method

#### Syntax

```
hUnion members
```

#### Returns

The names of all members of the union.

#### Description

Returns a list of the names of the members of the union. This list does not include the discriminant.

### 18.6.21.3 memberName Method

#### Syntax

```
hUnion memberName ?method args?
```

#### Returns

The result of applying *method* to the member given by *memberName*.

#### Description

Retrieves the member of the union using *memberName*. Invokes *method* and *args* on this member. If *method* is not given, returns the name of the member object.

If the member is not currently valid, an exception is thrown.

#### Exceptions

- No member with name *memberName*
- Can't apply *method* and/or *args* to member object
- Member is not valid

### 18.6.21.4 tagName Method

#### Syntax

```
hUnion tagName
```

#### Returns

The name of the tag containing the discriminant of the union.

#### Description

Returns the name of the discriminant of the union.

### 18.6.21.5 *tagName* Method to Retrieve Discriminant

#### Syntax

```
hUnion tagName ?method args?
```

#### Returns

The result of applying *method* to the discriminant given by *tagName*.

#### Description

Retrieves the discriminant of the union using *tagName*. Invokes *method* and *args* on this member. If *method* is not given, returns the name of the discriminant object.

#### Exceptions

- No member with name *memberName*
- Can't apply *method* and/or *args* to discriminant object

### 18.6.21.6 *currentTag* Method

#### Syntax

```
hUnion currentTag
```

#### Returns

The name of the union member that is currently valid (based on discriminant).

#### Description

Returns the name of the union member that is currently valid. This depends on the value of the discriminant of the union.

#### Example

```
> set u [make-myUnion]
> $u tagName
theTag
> $u currentTag
alpha
> $u alpha get
a
> $u beta get
error: beta is not active; alpha is currently active
```

#### Exceptions

Discriminant value out of domain

## 18.6.22 ushort

A ushort is an 16-bit unsigned integer. It can contain the values from 0 to 65535.

### 18.6.22.1 make-ushort Constructor

#### Syntax

```
make-ushort ?initial-value?
```

#### Returns

A handle to the newly created ushort object.

#### Description

Creates a short object and returns a handle to the ushort.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.22.2 get

#### Syntax

```
hUshort get
```

#### Returns

A number between 0 and 65535.

#### Description

Returns the stored number.

### 18.6.22.3 set

#### Syntax

```
hUshort set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the ushort object represented by *hUshort*.

#### Example

```
> set i [make-ushort]  
> $i set 5  
> $i get  
5
```

#### Exceptions

Illegal value for number



## 18.6.23 usmall

A **usmall** is an 8-bit unsigned integer. It can contain the values from 0 to 255.

### 18.6.23.1 make-usmall Constructor

#### Syntax

```
make-usmall ?initial-value?
```

#### Returns

A handle to the newly created usmall object.

#### Description

Creates a small object and returns a handle to the usmall.

#### Exceptions

- Out of memory
- Illegal initial value

### 18.6.23.2 get Method

#### Syntax

```
hUsmall get
```

#### Returns

A number between 0 and 255.

#### Description

Returns the stored number.

### 18.6.23.3 set Method

#### Syntax

```
hUsmall set newValue
```

#### Returns

Empty string

#### Description

Stores *newValue* into the usmall object represented by *hUsmall*.

#### Example

```
> set i [make-usmall]
> $i set 5
> $i get
5
```

#### Exceptions

Illegal value for number

## 18.7 RPC Calls in the Emulated Client

ATcl command is created for each operation defined in the interface. The command name is the name of the operation. The parameters to the command are the handles to the actual data objects to be used for the transfer. All handles must point to valid data objects. Input parameters must be initialized; output parameters do not have to be initialized.

### Syntax

```
RPC ?arg ...?
```

### Returns

Handle to the return value of the RPC call, as defined in the interface definition.

### Description

This is how to call an RPC. Each parameter in the interface definition (including output parameters) must be provided via handles to the real data.

### Example

In this example, result is an **error\_status\_t** object which contains the DCE status of the RPC call. The value **rpc\_s\_okay** means that the call was successful from DCE's point of view.

```
> set result [xbdValidateAddr $handle $streetAddr \  
              $status $msg $output]  
> $result get  
rpc_s_okay
```

### Exceptions

- Call timed out
- **RPC** is not defined in the interface
- Wrong number of arguments

## 18.8 Printing Objects

### 18.8.1 print

The following print routine is valid for all types defined in the IDL.

#### Syntax

```
$handle print label ?fileId?
```

#### Returns

Printout of the specified object or an empty string.

#### Description

The **print** method dumps the contents of a data handle in text format. If the object contains nested objects (e.g., arrays, structures, unions, pointers), the contained objects are also displayed.

If *fileId* is provided, the output goes to the file handle. *fileId* must be created using Tcl's open command. If *fileId* is not provided, the output goes to standard output.

*label* is used as the label of the main object.

#### Example

```
> set x [make-mystruct1_t]
> $x print x
x (struct) = 'mystruct1_t' {
  a_char (char) = 'c'
  a_short (short) = 0
}
```

#### Exceptions

*fileId* was not opened for writing

## 18.9 Getting the Type of an Object - `typeOfHandle`

All objects may retrieve their type using the `typeOfHandle` method.

### Syntax

```
handle typeOfHandle
```

### Returns

A string representing the type of the object

### Description

The `typeOfHandle` method returns the type of the object. The current types returned are **BYTE**, **CHAR**, **SMALL**, **USMALL**, **SHORT**, **USHORT**, **LONG**, **ULONG**, **HYPER**, **UHYPER**, **FLOAT**, **DOUBLE**, **BUFFER**, **STRING**, **ENUM**, **STRUCT**, **UNION**, **ARRAY**, **POINTER**, **HANDLE\_T**, **ERROR\_STATUS\_T**, **BOOLEAN**, **PIPE**.

### Example

```
> set x [make-mystruct1_t]
> $x typeOfHandle
STRUCT
```

## 18.10 RPC Calls in the Emulated Server

In the emulated server, DCE is in control until an RPC request is made. At that point, the Tcl command with the name of the operation is called. Handles are created for each of the parameters; these handles are passed on the command line. The Tcl command is a user-defined procedure which is responsible for producing valid output values in the output parameters, and for returning a valid return value.

The following procedure represents a template for the RPC procedures. In this example, the operation takes two input parameters (*handle* and *streetAddr*), and produces three output parameters (*status*, *msg*, and *output*). In addition, the operation returns an object of type **error\_status\_t** indicating the status of the RPC call.

```
proc xbdValidateAddr {handle streetAddr status msg output} {  
    puts "entered xbdValidateAddr"  
    # display streetAddr  
    ...  
    # compute status, msg, and output  
    ...  
    return [make-error_status_t rpc_s_okay]  
}
```

If any error occurs within a procedure for an operation, the emulated server replies with an error status of **rpc\_s\_unknown\_reject**.

## 18.11 Constants

A Tcl command is created for each constant defined in the interface. The command name is the name of the constant. The return value of the command is the value of the constant, as a string.

### Syntax

*constantName*

### Returns

The value of the constant defined in the interface

### Description

Constants can represent numeric or textural values.

## 18.12 Destroying Objects

All objects instantiated may be removed using the **destroy** method.

### 18.12.1 **destroy**

#### **Syntax**

```
handle destroy
```

#### **Returns**

An empty string

#### **Description**

The **destroy** method removes the handle from Tcl's command space. It also frees any resources associated with the handle. Subsequent use of the handle will result in an error.

If the object is part of a larger object (e.g., a member of a structure), the memory associated with the object is not freed until the container object is deleted. Only the name of the Tcl handle is deleted.

This is equivalent to using the low-level Tcl **rename** command as follows in the example.

#### **Example**

Both of these are equivalent:

```
> $object destroy  
> rename $object {}
```



## 18.13 Deleting Handles and Objects

The **xmyDceScope** method is used to automatically delete objects that were created. In addition, there are a series of methods that can be used to support **xmyDceScope**.

### 18.13.1 xmyDceScope

#### Syntax

```
xmyDceScope body
```

#### Returns

The result of executing *body*

#### Description

The **xmyDceScope** command evaluates the Tcl commands in *body*, ensuring that all objects created in *body* are deleted when finished. This is done regardless of the reason that *body* exits, through error, normal exit, or one of Tcl's flow control statements (**return**, **continue**, **break**).

This method is particularly useful around calls to RPCs to ensure that all data produced as a result of calling the RPC is deleted.

There is currently a limitation that there can only be one scope active at a time. Therefore, scopes can not be nested.

#### Example

```
> xmyDceScope {  
    set in [make-long 5];           # create an input parameter  
    set out [make-pointer];        # create an output parameter  
    rpc-call $in $out;             # call the RPC  
    $out print out;                # print the output parameter  
};                                  # delete in and out
```

#### Exceptions

Another scope is active

### 18.13.2 Methods Supporting the Deletion of Objects

These commands are provided for backward-compatibility. They should not be used in new scripts. The new **xmyDceScope** command should be used instead.

#### 18.13.2.1 xmyDceDeleteHandles

##### Syntax

```
xmyDceDeleteHandles ?handle1? ... ?HandleN?
```

##### Returns

An empty string

##### Description

The **xmyDceDeleteHandles** command deletes all the handles given as arguments. There is no error checking done to determine if the handles exist. This is used for bulk deletion of handles.

##### Examples

This deletes the handles *clientConn1* and *clientConn2*.

```
> xmyDceDeleteHandles clientConn1 clientConn2
```

This delete all handles.

```
> xmyDceDeleteHandles [info commands .xmyDceBinding*]
```

### 18.13.2.2 xmyDceDeleteAllHandles

#### Syntax

```
xmyDceDeleteAllHandles
```

#### Returns

An empty string

#### Description

The **xmyDceDeleteAllHandles** command deletes all handles used by DCE. These are commands that match **.xmyDceBinding\***. There is no error checking.

#### Examples

These two example are equivalent.

```
> xmyDceDeleteHandles [info commands .xmyDceBinding*]  
> xmyDceDeleteAllHandles
```

### 18.13.2.3 xmyDceDeleteDataHandles

#### Syntax

```
xmyDceDeleteDataHandles
```

#### Returns

An empty string

#### Description

The **xmyDceDeleteDataHandles** command deletes all handles that are not of type **handle\_t**.

#### Example

This delete all data handles.

```
> xmyDceDeleteDataHandles
```

#### 18.13.2.4 xmyDceSaveHandles

##### Syntax

DCE Package:Handles:Restoring

```
xmyDceSaveHandles
```

##### Returns

An empty string

##### Description

The **xmyDceSaveHandles** command saves the list of all handles currently in use. The **xmyDceRestoreHandles** command deletes all handles not in this list. The list is stored in the **xmyG\_HandlesToSave** associative array.

##### Example

This saves and restores a set of handles.

```
> xmyDceSaveHandles  
> #contents of a script  
> xmyDceRestoreHandles
```

#### 18.13.2.5 xmyDceRestoreHandles

##### Syntax

```
xmyDceRestoreHandles
```

##### Returns

An empty string

##### Description

The **xmyDceRestoreHandles** command restores the set of handles to the set previously marked with **xmyDceSaveHandles**. It does this by deleting all of the handles that were not marked using **xmyDceSaveHandles**.

##### Example

This saves and restores a set of handles.

```
> xmyDceSaveHandles  
> # contents of a script  
> xmyDceRestoreHandles
```

## 18.14 Getting the Interface- xmyDceInterface

You may get the name of the current interface handle using the **xmyDceInterface** command.

### Syntax

```
xmyDceInterface
```

### Returns

The name of the interface handle

### Description

The **xmyDceInterface** command returns the name of the interface that is being used in the emulated client or emulated server.

### Example

```
> set interface [xmyDceInterface]
> $interface name
tutorial
> $interface uuid
000b6ed6-debb-11a1-bcc2-80606abaaa77
```

## 18.15 DCE/Async Commands

The **xmyDceRecordEnterOperation**, **xmyDceRecordExitOperation**, and **xmyDceCallRpc** commands are used for integrating with the MYNAH System using the TermAsync package. They are only used in the emulated client, and have no effect if not running under the TermAsync package (i.e., **XMY\_DCE\_RUNNING\_UNDER\_ASYNC** is not set).

These commands are used in the template scripts produced by the parser.

### 18.15.1 xmyDceRecordEnterOperation

#### Syntax

```
xmyDceRecordEnterOperation operationName
```

#### Returns

An empty string

#### Description

The **xmyDceRecordEnterOperation** command records the entry into the operation.

#### Example

```
> xmyDceRecordEnterOperation rpc-1  
> rpc-1 $handle $output;           # call the RPC  
> $output print output;           # dump the output parameter  
> xmyDceRecordExitOperation rpc-1 "OKAY"
```

## 18.15.2 xmyDceRecordExitOperation

### Syntax

```
xmyDceRecordExitOperation operationName status
```

### Returns

An empty string

### Description

The **xmyDceRecordExitOperation** command records the exit status of the operation.

*status* must be one of **OKAY**, **EVAL\_FAILED**, **PARAM\_BAD**, **ILLEGAL\_RETURN**, **RETURN\_BAD**, **CLIENT\_OP\_FAILED**

### Example

```
xmyDceRecordEnterOperation rpc-1  
rpc-1 $handle $output;           # call the RPC  
$output print output;           # dump the output parameter  
xmyDceRecordExitOperation rpc-1 "OKAY"
```

### 18.15.3 xmyDceCallRpc

#### Syntax

```
xmyDceCallRpc rpc ?args?
```

#### Returns

The result of calling *rpc*

#### Description

The **xmyDceCallRpc** command calls the RPC with the arguments, catching any Tcl error response. If an error occurs, it calls **xmyDceRecordExitOperation** with **CLIENT\_OP\_FAILED** status and rethrows the error.

#### Example

Record an exit due to an error return from the RPC.

```
xmyDceRecordEnterOperation rpc-1  
xmyDceCallRpc rpc-1 $handle $output; # call the RPC  
$output print output; # dump the outputs  
xmyDceRecordExitOperation rpc-1 "OKAY"
```



## 19. GUI Tcl Language Extensions

The GUI test domain of the MYNAH system provides the ability to test GUI applications running under the X Window System or Microsoft® Windows® 3.1, Windows95, or Windows NT® systems. It does this by interfacing to existing vendor tools (e.g., QA Partner™ and SQA®).

There are no language extensions provided specifically for the GUI test domain. Users write test scripts for the specific tool they are using. The MYNAH System treats these scripts just like any other MYNAH script. They must, however, be executed as special engines that are configured for the appropriate vendor tool. They may execute the scripts using the MYNAH GUI or the MYNAH CLUI, or as a child script of another MYNAH script using the Child Script language extensions. See the description of Child Script language extensions in [Section 8](#).

### 19.1 Accessing the MYNAH Symbol Table

The MYNAH System is shipped with scripts that let the GUI test tools access the MYNAH symbol table, which is important for data flow between SEs.

**NOTE** — These scripts are implemented for QA Partner, only. They have not yet been implemented for SQA.

To use these scripts, you must edit their GUI test script (e.g., a QA Partner script) to include the appropriate script as determined by [Table 19-1](#).

**Table 19-1.** Choosing a GUI Test Tool Include Script

If you use this GUI tool ...	Enter this line in your GUI test script
QA Partner	use "<XMYDIR>/lib/qap/xmy.inc" <sup>a</sup>
SQA	TBD

a. You cannot use the environment variable \$XMYDIR; you must enter the full path to \$XMYDIR.

You can use the general MYNAH Tcl extensions (**xmySymTblExists**, **xmySymTblGet**, and **xmySymTblPut**) to manipulate the Symbol Table. In addition, you can use **xmyMYNAHIsRunning** to determine if the GUI tool is running under MYNAH control

**NOTE** — For information on the Symbol Table and the general MYNAH Tcl extensions, see [Section 6](#).

Table 19-2 lists extensions (and their syntax) you must enter in your GUI test script to manipulate the Symbol Table.

**Table 19-2.** GUI Test Tool Symbol Table Extensions

If you use this GUI tool ...	Enter these lines in your GUI test script to manipulate the Symbol Table
QA Partner	BOOLEAN exists = xmySymTblExists("SymbolName") STRING value = xmySymTblGet("SymbolName") xmySymTblPut("SymbolName", "value") BOOLEAN mynah = xmyMYNAHIsRunning()
SQA	TBD

## 19.2 SQA Pointer Scripts

### Syntax

```
# xmyPointerScript
set xmyPointerScript(res) {}
set xmyPointerScript(remoteScript) {}
xmyPointerScriptEnd
```

### Description

By default, the MYNAH System uses the *xmyConfig Engine* entry's **ExecScript** parameter to forward execution requests to a Remote Execution Server (RES) running on a PC. The RES acts as an agent for the SE, running the script with the SQA tool.

An SE that uses **ExecScript** does not run the user script within the SE; the script specified by the **ExecScript** parameter is run in the SE. The user script is passed in the global variable **xmyVar(ScriptName)**. The user script on UNIX points to the real script on the PC.

In order to determine to which PC the execution request should be sent, the SE consults the Remote Execution Server DataBase (RESDB) containing the RESs for a particular SEGroup within an SD. This database is accessed through Tcl.

Instead of using the **ExecScript** parameter, you may want create a **pointer script** on UNIX choose a specific RES on which to run the script.

**NOTE** — You may wish to create a MYNAH Script object for the pointer script. This step is optional, and is necessary only if you want to use the MYNAH test management functions.

The pointer script documents where to find the real vendor, mapping the script on UNIX to the real script on the remote machine (typically a PC). It may also be used to bypass the RESDB to force the script to run on a specific host.

The pointer script is sourced at the global level after the **ExecScript** is sourced but before it starts any processing.

The pointer script requires the following methods.

**NOTE** — There should be nothing else in the pointer script; comments are allowed.

<b># xmyPointerScript</b>	A required header comment that signifies that this is a pointer script. If the script does not begin with this comment, the execution aborts.
<b>xmyPointerScript(res)</b>	A list containing the host and port of the RES that should be used for executing this script. If <b>xmyPointerScript(res)</b> is set to an empty string, the RES will be chosen from the RESDB.
<b>xmyPointerScript(remoteScript)</b>	The name of the script on the remote machine. If set to the empty string, the basename of the script is used in computing the name of the remote script.
<b>xmyPointerScriptEnd</b>	A required footer comment.

### Example

```
# xmyPointerScript
set xmyPointerScript(res) {klehrpc.pc259 30001}
set xmyPointerScript(remoteScript) {c:\scripts\test.scr}
xmyPointerScriptEnd
```



## 20. Conversion Runtime Procedures

This section describes the Tcl procedures supplied with the MYNAH System that support the runtime environment for scripts converted from MYNAH 4.x. These procedures are provided to help you better understand the converted scripts that invoke these procedures.

**NOTE** — While these procedures do not provide much utility for new scripts developed using the MYNAH 5.3 Tcl extensions, you can create scripts using these procedures.

Where appropriate the following section headings will list the MYNAH 5.3 Tcl procedure first and then the MYNAH 4.x command, e.g., **xmyCompareLines** / **compare-lines**.

In addition, each section begins with a table mapping the MYNAH Tcl procedure with the corresponding MYNAH 4.x command(s). If no corresponding MYNAH 4.x command exists, this table cell will contain NA.

### 20.1 FIN Scripts

This section contains the procedures that were created for working with FIN scripts only.

[Table 20-1](#) list the MYNAH 5.3 Tcl procedure, the MYNAH 4.x FIN command, and the section where the description of the MYNAH 5.3 Tcl procedure can be found.

**Table 20-1.** FIN Commands to MYNAH 5.3 Mappings

MYNAH 5.3 Tcl Procedure	MYNAH 4.x FIN command(s)	Section
<b>ASYNConnect</b>	NA	<a href="#">Section 20.1.1</a>
<b>xmyBreakLines</b>	<b>compare-lines,</b> <b>print-response,</b> <b>log-for-phaser</b>	<a href="#">Section 20.1.2</a>
<b>xmyCompareLines</b>	<b>compare-lines</b>	<a href="#">Section 20.1.3</a>
<b>xmyGetEnvFin</b>	<b>getenv</b>	<a href="#">Section 20.1.4</a>
<b>xmyLastPart</b>	<b>last-part</b>	<a href="#">Section 20.1.5</a>
<b>xmy_ListToAttributeFin</b>	<b>atr</b>	<a href="#">Section 20.1.6</a>
<b>xmyRecordCompareFin</b>	<b>test, compare-lines</b>	<a href="#">Section 20.1.7</a>
<b>xmySetOutputLevelFin</b>	<b>print-level</b>	<a href="#">Section 20.1.8</a>
<b>xmyTransKeyFin</b>	NA	<a href="#">Section 20.1.9</a>

### 20.1.1 ASYNCconnect

#### Syntax

```
ASYNCconnect
```

#### Return

Async connection handle

#### Description

The **ASYNCconnect** procedure returns an existing Async connection handle or, if one does not exist, creates and returns a new Async connection handle.

#### Example

```
> ASYNCconnect
```

## 20.1.2 xmyBreakLines / (compare-lines, print-response, log-for-phaser)

### Syntax

```
xmyBreakLines async_response ?list_of_modifiers?
```

### Return

A list of lines

### Description

The **xmyBreakLines** procedure breaks the lines of a response into a list of lines, according to the modifiers list, and returns it. This procedure is used to implement the FIN commands listed above.

**xmyBreakLines** takes the following attributes:

- |                          |   |
|--------------------------|---|
| <i>async_response</i>    | The output of a handle's <b>response</b> method.  |
| <i>list_of_modifiers</i> | The optional modifiers list specified for the <b>compare-lines</b> , <b>print-response</b> , or <b>log-for-phaser</b> FIN commands. |

### Examples

- The MYNAH 4.X **compare-lines** code (comparing patterns)

```
compare-lines from-pattern "abc"  
to-pattern "-echoke"  
columns 1 99  
expect  
:abababababab  
end
```

translates to

```
xmyRecordCompareFin $conn_async \  
  [xmyCompareLines $conn_async \  
    [xmyBreakLines [$conn_async response] \  
  [list [list from-pattern [xmyTCLTransRE "abc"]] \  
    [list to-pattern \  
  [xmyTCLTransRE "-echoke"]] {columns 1 99}]] {  
  "abababababab"  
  }]  
}]
```

- The MYNAH 4.X **compare-lines** code (comparing lines)

```
compare-lines from-line 1
to-line 5 fields 1 5 field-delimiter " "
mask "abc" "123"
expect
:abababababab
end
```

translates to

```
xmyRecordCompareFin $conn_async \
    [xmyCompareLines $conn_async \
        [xmyBreakLines [$conn_async response] \
            [list {from-line 1} {to-line 5} \
                {fields 1 5} {field-delimiter " "} \
                [list mask [xmyTCLTransRE "abc"] "123"]]]] {
    "abababababab"
} ]
```

- The MYNAH 4.X **log-for-phaser** code

The MYNAH 4.X code

```
log-for-phaser from-line 1
to-line 3
expect
:ananana
end
```

translates to

```
foreach XX_1 [xmyBreakLines [$conn_async \
    response] [list {from-line 1} {to-line 3}]] {
    xmyPrint -text "++ ${XX_1}"
}
```



### 20.1.3 xmyCompareLines / compare-lines

#### Syntax

```
xmyCompareLines conn_async async_lines expected_lines
```

#### Return

0 - if the comparison failed  
1 - if the comparison was successful

#### Description

The **xmyCompareLines** procedure compares two sets of lines, performing wildcard matching based on the Async handle's **-wildcard** attribute. The result of the comparison, either 0 or 1, is returned. The value 0 means failure, and 1 means success. See also [Section 20.1.2](#), **xmyBreakLines / (compare-lines, print-response, log-for-phaser)**.

**xmyCompareLines** takes the following attributes:

<i>conn_async</i>	A handle to an asynchronous connection.
<i>async_lines</i>	The lines from the <i>conn_async</i> handle.
<i>expected_lines</i>	The number of expected lines.

#### Example

The MYNAH 4.X code

```
compare-lines from-pattern "abc"  
to-pattern "-echoke"  
columns 1 99  
expect  
:abababababab  
end
```

translates to

```
xmyRecordCompareFin $conn_async \  
  [xmyCompareLines $conn_async [xmyBreakLines \  
    [$conn_async response] \  
    [list [list from-pattern [xmyTCLTransRE "abc"]]] \  
    [list to-pattern \  
      [xmyTCLTransRE "-echoke"]]] {columns 1 99}]] {  
  "abababababab"  
}]
```

#### 20.1.4 xmyGetEnvFin / getenv

##### Syntax

```
xmyGetEnvFin env_variable
```

##### Return

A string containing the value of the *env\_variable*

##### Description

The **xmyGetEnvFin** procedure gets an environment variable value and returns it. If the variable does not exist, a string containing a single space is returned.

**xmyGetEnvFin** takes the following attribute:

*env\_variable*      A string containing the environment variable name.

##### Example

The MYNAH 4.X code

```
set x = getenv( "HOME" )
```

translates to

```
set x [xmyGetEnvFin "HOME"]
```

## 20.1.5 xmyLastPart / last-part

### Syntax

```
xmyLastPart conn_async ?number_of_chars?
```

### Return

A string

### Description

The **xmyLastPart** procedure emulates the FIN's built-in **last-part** function. If a non-zero *number\_of\_chars* is passed, then that number of characters is returned from the end of the response. Otherwise, enough characters to make the response unique are returned.

**xmyLastPart** takes the following attributes:

<i>conn_async</i>	A handle to an asynchronous connection
<i>number_of_chars</i>	The number of characters from the end of the response

### Example

The MYNAH 4.X code

```
wait-until ( ( last-part( 2 ) ) == "9H" )
```

translates to

```
$conn_async wait { [string compare \  
    [xmyLastPart $conn_async 2] "9H" ] == 0 }
```

### 20.1.6 xmy\_ListToAttributeFin / atr

#### Syntax

```
xmy_ListToAttributeFin list_of_attributes
```

#### Return

A number

#### Description

The **xmy\_ListToAttributeFin** procedure translates a MYNAH 5.3 ASYNC character attribute list into a FIN character attribute number and returns it.

**xmy\_ListToAttributeFin** takes the following attribute:

*list\_of\_attributes* Lists the attributes returned by the **getAttributes** method.

#### Example

The MYNAH 4.X code

```
set attribute = atr( Row, Column )
```

translates to

```
set attribute [xmy_ListToAttributeFin [$conn_async \  
    getAttributes -position [list $Row $Column]]]
```

## 20.1.7 xmyRecordCompareFin / (test, compare-lines)

### Syntax

```
xmyRecordCompareFin conn_async expr_result
```

### Return

A number

### Description

The **xmyRecordCompareFin** procedure records the results of a comparison in the **xmyCompare** global variable code and the MYNAH **xmyVar** variables, such as **xmyVar(GoodCompares)** and **xmyVar(FailedCompares)**. However, it does not affect the handle's comparison value and therefore need not be called if the comparison is done through a handle method. The value of the *expr\_result* parameter is returned.

**xmyRecordCompareFin** takes the following attributes:

- |                    |   |
|--------------------|---|
| <i>conn_async</i>  | Specifies a handle to an asynchronous connection. |
| <i>expr_result</i> | The result of an expression, usually 0 or 1       |

### Examples

- The MYNAH 4.X **test** code

```
test x == 10  
expect  
:1  
end
```

translates to

```
xmyRecordCompareFin $conn_async [expr {[string compare \  
    [expr {$x == 10}] "1"] == 0}]
```

- The MYNAH 4.X **compare-lines** code

```
compare-lines from-pattern "abc"  
to-pattern "-echoke"  
columns 1 99  
expect  
:abababababab  
end
```

translates to

```
xmyRecordCompareFin $conn_async [xmyCompareLines\  
    $conn_async \  
    [xmyBreakLines [$conn_async response] \  
    [list [list from-pattern \  
    ]
```

```
|      [xmyTCLTransRE "abc"]] [list to-pattern \  
|          [xmyTCLTransRE "-echoke"]] \  
|      {columns 1 99}]] {  
|          "abababababab"  
|      }]  
|
```

### 20.1.8 xmySetOutputLevelFin / print-level

#### Syntax

```
xmySetOutputLevelFin
```

#### Return

None

#### Description

The **xmySetOutputLevelFin** procedure sets the output level to a value corresponding to the **xmyPrintLevel** (FIN print-level) value. This procedure may be useful if the user is familiar with setting the FIN print-level but not the MYNAH 5.3

**xmyVar(OutputLevel)** .

**xmySetOutputLevelFin** will perform the following **print-level** translations:

<i>0</i>	set xmyVar(OutputLevel) {}
<i>1</i>	set xmyVar(OutputLevel) {error compare \ usage sutimage}}
<i>5</i>	set xmyVar(OutputLevel) {error sutimage}}
<i>6</i>	set xmyVar(OutputLevel) {error suttiming}}
<i>default</i>	set xmyVar(OutputLevel) {error childscr compare \ script summary sutimage testobj user}}

#### Example

The MYNAH 4.X code

```
set print-level = 0
```

translates to

```
set xmyPrintLevel 0; xmySetOutputLevelFin
```

### 20.1.9 xmyTransKeyFin

#### Syntax

```
xmyTransKeyFin keyname
```

#### Return

A string

#### Description

The **xmyTransKeyFin** procedure translates a key name from FIN into a MYNAH 5.X ASYNC connection key name and returns it.

**xmyTransKeyFin** takes the following attribute:

***keyname***            A string containing the name of the key, e.g., ***BS***.

#### Example

The MYNAH 4.X code

```
push BS
```

translates to

```
$conn_async send -key [xmyTransKeyFin BS]
```



## 20.2 FUR Scripts

This section contains the procedures that were created for working with FUR scripts only.

[Table 20-2](#) list the MYNAB 5.3 Tcl procedure, the MYNAB 4.x FUR command, and the section where the description of the MYNAB 5.3 Tcl procedure can be found.

**Table 20-2.** FUR Commands to MYNAB 5.3 Mappings

MYNAB 5.3 Tcl Procedure	MYNAB 4.x FUR Command(s)	Section
<b>3270connect</b>	NA	<a href="#">Section 20.2.1</a>
<b>xmyAddMask</b>	<b>add_mask</b>	<a href="#">Section 20.2.2</a>
<b>xmyDisableMask</b>	<b>disable_mask</b>	<a href="#">Section 20.2.3</a>
<b>xmyEnableMask</b>	<b>enable_mask</b>	<a href="#">Section 20.2.4</a>
<b>xmyFieldBegin</b>	<b>fldbeg, fldbeg_tag</b>	<a href="#">Section 20.2.5</a>
<b>xmyFieldNext</b>	<b>fldnext</b>	<a href="#">Section 20.2.6</a>
<b>xmyFieldNextTag</b>	<b>fldnext_tag</b>	<a href="#">Section 20.2.7</a>
<b>xmyGetEnvFur</b>	<b>getenv</b>	<a href="#">Section 20.2.8</a>
<b>xmy_ListToAttributeFur</b>	<b>atr, atr_tag</b>	<a href="#">Section 20.2.9</a>
<b>xmy_ListToPositionFur</b>	<b>col, fldbeg, fldbeg_tag, fldnext, fldnext_tag</b>	<a href="#">Section 20.2.10</a>
<b>xmyMoveCursorPattern</b>	<b>move_cursor_pattern</b>	<a href="#">Section 20.2.11</a>
<b>xmyReconnect</b>	<b>reconnect</b>	<a href="#">Section 20.2.12</a>
<b>xmyRecordCompareFur</b>	<b>test</b>	<a href="#">Section 20.2.13</a>
<b>xmySetOutputLevelFur</b>	<b>print-level</b>	<a href="#">Section 20.2.14</a>

## 20.2.1 3270connect

### Syntax

```
3270connect
```

### Return

3270 connection handle

### Description

The **3270connect** procedure returns an existing 3270 connection handle or, if one does not exist, creates and returns a new 3270 connection handle.

### Example

```
3270connect
```

## 20.2.2 xmyAddMask / add\_mask

### Syntax

```
xmyAddMask mask_name mask_pattern
```

### Return

- 0 - if the *mask\_name* already existed
- 1 - if the *mask\_name* was added successfully

### Description

The **xmyAddMask** procedure creates masks to be used by a 3270 connection. *mask\_name* is used as an index into the global **xmyMask** array, and the *mask\_pattern* is used to create an **xmyMask**. If the mask name and pattern match an existing mask, no mask is created. Otherwise, a new mask is created and stored, along with any previous masks in the **xmyMask** array.

**xmyAddMask** takes the following attributes:

- |                     |  |
|---------------------|--|
| <i>mask_name</i>    | The name of the mask that should be added to the global list of masks. |
| <i>mask_pattern</i> | The pattern of the mask.   |

### Example

The MYNAH 4.X code

```
set result = add_mask("DATE",  
"[0-1][0-9]/[0-3][0-9]/[0-9][0-9]")
```

translates to

```
set result [xmyAddMask "DATE" [xmyTCLTransRE \  
"\[0-1\]\[0-9\]/\[0-3\]\[0-9\]/\[0-9\]\[0-9\]"]]
```

### 20.2.3 xmyDisableMask / disable\_mask

#### Syntax

```
xmyDisableMask conn_3270 mask_list
```

#### Return

- 0 - if no masks were disabled
- 1 - if any masks were disabled

#### Description

The **xmyDisableMask** procedure disables a set of masks on a 3270 connection. If the *mask\_list* is empty, all enabled masks in the connection **conn\_3270** are disabled. Otherwise, all masks in the **xmyMask**'s global array under the names given will be disabled.

**xmyDisableMask** takes the following attributes:

- |                  |   |
|------------------|---|
| <i>conn_3270</i> | A handle to a 3270 connection                   |
| <i>mask_list</i> | A comma and space separated list of mask names. |

#### Examples

- For one mask

The MYNAH 4.X code

```
set result = disable_mask("DATE")
```

translates to

```
set result [xmyDisableMask $conn_3270 "DATE"]
```

- For a list of masks

The MYNAH 4.X code

```
set result = disable_mask("DATE,TIME")
```

translates to

```
set result [xmyDisableMask $conn_3270 "DATE,TIME"]
```

- For all masks

The MYNAH 4.X code

```
set result = disable_mask("")
```

translates to

```
set result [xmyDisableMask $conn_3270 ""]
```

## 20.2.4 xmyEnableMask / enable\_mask

### Syntax

```
xmyEnableMask conn_3270 mask_list
```

### Return

- 0 - if no masks were enabled
- 1 - if any masks were enabled

### Description

The **xmyEnableMask** procedure enables a set of masks on a 3270 connection. If the *mask\_list* is empty, all masks referenced by the global array **xmyMask** are enabled. Otherwise, all masks in the **xmyMask**'s array under the names given will be enabled. The masks not known through **xmyMask** will not be enabled through this call.

**xmyEnableMask** takes the following attributes:

- |                  |   |
|------------------|---|
| <i>conn_3270</i> | A handle to a 3270 connection.                  |
| <i>mask_list</i> | A comma and space separated list of mask names. |

### Examples

- For one mask

The MYNAH 4.X code

```
set result = enable_mask("DATE")
```

translates to

```
set result [xmyEnableMask $conn_3270 "DATE"]
```

- For a list of masks

The MYNAH 4.X code

```
set result = enable_mask("DATE,TIME")
```

translates to

```
set result [xmyEnableMask $conn_3270 "DATE,TIME"]
```

- For all masks

The MYNAH 4.X code

```
set result = enable_mask("")
```

translates to

```
set result [xmyEnableMask $conn_3270 ""]
```

## 20.2.5 xmyFieldBegin / fldbeg, fldbeg\_tag

### Syntax

```
xmyFieldBegin conn_3270 3270_position
```

### Return

A Tcl list for the beginning of a field in the format *{row column}*

### Description

The **xmyFieldBegin** procedure finds the beginning of a field and returns it as a list.

**xmyFieldBegin** takes the following attributes:

- |                      |  |
|----------------------|--|
| <i>conn_3270</i>     | A handle to a 3270 connection  |
| <i>3270_position</i> | The location of the field being requested.<br>Either of the following formats is valid: <ul style="list-style-type: none"><li>• <i>{-position {row column}}</i></li><li>• <i>{-tag tag -offset offset}</i></li></ul> |

### Examples

- **fldbeg** using variables

The MYNAH 4.X code

```
set position = fldbeg(rows, columns)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldBegin $conn_3270 [list -position\  
             [list $rows $columns]]]]
```

- **fldbeg** using row/column values

The MYNAH 4.X code

```
set position = fldbeg(24, 2)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldBegin $conn_3270 \  
             [list -position [list 24 2]]]]
```

- **fldbeg\_tag** with zero offset into the field

The MYNAH 4.X code

```
set position = fldbeg_tag("employee", 0)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             xmyFieldBegin $conn_3270 \  
             [list -tag "employee"]]]
```

- **fldbeg\_tag** with offset into field of 2

The MYNAH 4.X code

```
set position = fldbeg_tag("employee", 2)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldBegin $conn_3270 \  
             [list -tag "employee" -offset 2]]]
```

## 20.2.6 xmyFieldNext / fldnext

### Syntax

```
xmyFieldNext conn_3270 row column ?protected?
```

### Return

A Tcl list for the next field in the format *{row column}*

### Description

The **xmyFieldNext** procedure returns the location of the next field.

**xmyFieldNext** takes the following attributes:

<i>conn_3270</i>	A handle to a 3270 connection.
<i>row</i>	Specifies the starting row. Enter a value from 1 to 27, depending on the emulated screen size.  A value less than 1 returns the location of the first unprotected field.
<i>column</i>	Specifies the starting column. Enter a value from 1 to 132, depending on the emulated screen size.
<i>protected</i>	Specifies whether the field is protected. <i>protected</i> is one of the following:  <i>1</i> = Processing protected field  <i>0</i> = Not processing.  Default = 0.

### Examples

- Using variables

The MYNAH 4.X code

```
set position = fldnext(rows, columns)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
[xmyFieldNext $conn_3270 $rows $columns]]
```



- Using row/column values and offset of 2 into the field

The MYNAH 4.X code

```
set position = fldnext(24, 2, 2)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldNext $conn_3270 24 2 2]]
```

- For the next protected field

The MYNAH 4.X code

```
set position = fldnext(rows, columns, 1)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldNext $conn_3270 $rows $columns 1]]
```

## 20.2.7 xmyFieldNextTag / fldnext\_tag

### Syntax

```
xmyFieldNextTag conn_3270 tag offset protected
```

### Return

A Tcl list for the next field in the format *{row column}*

### Description

The **xmyFieldNextTag** procedure returns the location of the next field.

**xmyFieldNextTag** takes the following attributes:

<i>conn_3270</i>	A handle to a 3270 connection
<i>tag</i>	The tag name as the starting point
<i>offset</i>	The offset from the tag
<i>protected</i>	Specifies whether the field is protected <i>1</i> = Processing protected field <i>0</i> = Not processing. Default = 0.

### Examples

- With zero offset into the field

The MYNAH 4.X code

```
set position = fldnext_tag("employee", 0)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldNextTag $conn_3270 "employee" 0]]
```

- With offset into the field of 2

The MYNAH 4.X code

```
set position = fldnext_tag("employee", 2)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldNextTag $conn_3270 "employee" 2]]
```

- For the next protected field, with zero offset into the field

The MYNAH 4.X code

```
set position = fldnext_tag("employee", 0, 1)
```

translates to

```
set position [xmy_ListToPositionFur $conn_3270 \  
             [xmyFieldNextTag $conn_3270 "employee" 0 1]]
```

## 20.2.8 xmyGetEnvFur / getenv

### Syntax

```
xmyGetEnvFur env_variable
```

### Return

A string containing the value of the requested variable, or an empty string if the variable does not exist.

### Description

The **xmyGetEnvFur** procedure gets an environment variable value and returns it.

**xmyGetEnvFur** takes the following attribute:

*env\_variable*      A string containing the environment variable name.

### Example

The MYNAH 4.X code

```
set var = getenv("HOME")
```

translates to

```
set var [xmyGetEnvFur "HOME"]
```

## 20.2.9 xmy\_ListToAttributeFur / (atr, atr\_tag)

### Syntax

```
xmy_ListToAttributeFur list_of_attributes
```

### Return

A number

### Description

The **xmy\_ListToAttributeFur** procedure translates a MYNAH 5.3 3270 field attribute list into a FUR field attribute number.

**xmy\_ListToAttributeFur** takes the following attribute:

*list\_of\_attributes* Lists the attributes returned by the **getAttributes** method.

### Examples

- **atr**

The MYNAH 4.X code

```
set attribute = atr(Row,Column)
```

translates to

```
set attribute [xmy_ListToAttributeFur [$conn_3270 \  
getAttribute -position [list $Row $Column]]]
```

- **atr\_tag** with zero offset into the field

The MYNAH 4.X code

```
set attribute = atr_tag("tag_name", 0)
```

translates to

```
set attribute [xmy_ListToAttributeFur [$conn_3270 \  
getAttribute -tag "tag_name"]]
```

- **atr\_tag** with offset into field of 2

The MYNAH 4.X code

```
set attribute = atr_tag("tag_name", 2)
```

translates to

```
set attribute [xmy_ListToAttributeFur [$conn_3270 \  
getAttribute -tag "tag_name" -offset 2]]
```

### 20.2.10 **xmy\_ListToPositionFur** / (col, fldbeg, fldbeg\_tag, fldnext, fldnext\_tag)

#### Syntax

```
xmy_ListToPositionFur conn_3270 list_row_col
```

#### Return

A number that corresponds to the FUR position value

#### Description

The **xmy\_ListToPositionFur** procedure translates a row-column position list into a FUR position number.

**xmy\_ListToPositionFur** takes the following attributes:

*conn\_3270*            A handle to a 3270 connection.

*list\_row\_col*        A list having the row and the column.

#### Example

```
set positionNumber [xmy_ListToPositionFur $conn_3270 \  
                  [xmyFieldNext $conn_3270 1 2]]
```

## 20.2.11 xmyMoveCursorPattern / move\_cursor\_pattern

### Syntax

```
xmyMoveCursorPattern conn_3270 pattern \  
    ?occurrence ?row ?column ?attribute????
```

### Return

0 - if the pattern is not found  
1 - if the pattern is found

### Description

The **xmyMoveCursorPattern** procedure moves the cursor to the desired pattern.

**xmyMoveCursorPattern** takes the following attributes:

<i>conn_3270</i>	A handle to a 3270 connection
<i>pattern</i>	The pattern to search for
<i>occurrence</i>	A number specifying which occurrence of the pattern
<i>row</i>	The row from where to start looking
<i>column</i>	The column from where to start looking
<i>attribute</i>	A string to specify 3270 attributes for the pattern, consisting of one or more of the following characters: <ul style="list-style-type: none"><li><b>a</b> Match all attributes (default)</li><li><b>u</b> Match unprotected</li><li><b>m</b> Modified unprotected</li><li><b>p</b> Numeric protected</li><li><b>h</b> Highlighted numeric protected</li><li><b>i</b> Invisible modified numeric protected</li></ul>

### Example

The MYNAH 4.X code

```
set position = move_cursor_pattern("employee: ")
```

translates to

```
set position [move_cursor_pattern $conn_3270 "employee: "]
```

## 20.2.12 xmyReconnect / reconnect

### Syntax

```
xmyReconnect conn_3270_var
```

### Return

0 - if it fails to reconnect  
1 - if it reconnected successfully

### Description

The **xmyReconnect** procedure recreates a 3270 connection attempting to maintain as much state as possible across the connections. It will not maintain certain statistically oriented attributes, such as **-dataBytesReceived** or **-lastKeyPressed**.

**xmyReconnect** takes the following attribute

*conn\_3270\_var*    The variable that has the handle to a 3270 connection.

### Example

The MYNAH 4.X code

```
set position = reconnect()
```

translates to

```
set position [xmyReconnect conn_3270]
```



### 20.2.13 xmyRecordCompareFur / test

#### Syntax

```
xmyRecordCompareFur conn_3270 expr_result
```

#### Return

A number

#### Description

The **xmyRecordCompareFur** procedure records the results of a comparison in the global variable **xmyCompareCode** and the MYNAH **xmyVar** variables, such as **xmyVar(GoodCompares)** and **xmyVar(FailedCompares)**. However it does not affect the handle's comparison value and therefore need not be called if the comparison is done through a handle method. The value of the *expr\_result* parameter is returned.

**xmyRecordCompareFur** takes the following attributes:

<i>conn_3270</i>	A handle to a 3270 connection
<i>expr_result</i>	The result of an expression, usually 0 or 1

#### Example

The MYNAH 4.X code

```
set x = 1  
test x == 1  
expect  
:1  
end
```

translates to

```
set x 1  
  
xmyRecordCompareFur $conn_3270 [expr {[string compare \  
    [expr {$x == 1}] "1"] == 0}]
```

## 20.2.14 xmySetOutputLevelFur / print-level

### Syntax

```
xmySetOutputLevelFur
```

### Return

None

### Description

The **xmySetOutputLevelFur** procedure sets the output level to a value corresponding to the **xmyPrintLevel** (FUR print-level) value. This procedure may be useful if you are familiar with setting the FUR print-level but not the MYNAH 5.3 **xmyVar(OutputLevel)**.

**xmySetOutputLevelFur** will perform the following **print-level** translations:

<i>0</i>	set xmyVar(OutputLevel) {}
<i>1</i>	set xmyVar(OutputLevel) {error compare \ usage sutimage}}
<i>5</i>	set xmyVar(OutputLevel) {error sutimage}}
<i>6</i>	set xmyVar(OutputLevel) {error suttiming}}
<i>default</i>	set xmyVar(OutputLevel) {error childscr compare \ script summary sutimage testobj user}}

### Example

The MYNAH 4.X code

```
set print-level = 3
```

translates to

```
set xmyPrintLevel 3; xmySetOutputLevelFur
```

## 20.3 FIN and FUR Scripts

This section contains the procedures that were created for working with both FIN and FUR scripts.

[Table 20-3](#) list the MYNAH 5.3 Tcl procedure, the MYNAH 4.x FIN and FUR command, and the section where the description of the MYNAH 5.3 Tcl procedure can be found.

**Table 20-3.** FIN and FUR Commands to MYNAH 5.3 Mappings

MYNAH 5.3 Tcl Procedure	MYNAH 4.x FIN and FUR Command(s)	Section
<b>xmyEOF</b>	<b>eof</b>	<a href="#">Section 20.3.1</a>
<b>xmyAddMonth</b>	<b>addmonth</b>	<a href="#">Section 20.3.2</a>
<b>xmyAToN</b>	<b>aton</b>	<a href="#">Section 20.3.3</a>
<b>xmyBreakPoint</b>	<b>breakpoint</b>	<a href="#">Section 20.3.4</a>
<b>xmyCallPrompt</b>	<b>prompt</b>	<a href="#">Section 20.3.5</a>
<b>xmyCallShell</b>	<b>shell</b>	<a href="#">Section 20.3.6</a>
<b>xmyExpand</b>	<b>\$</b>	<a href="#">Section 20.3.7</a>
<b>xmyFindLibPath</b>	<b>load</b>	<a href="#">Section 20.3.8</a>
<b>xmyKeylGetKey</b>	<b>dbget-key</b>	<a href="#">Section 20.3.9</a>
<b>xmyMultiPrompt</b>	<b>multiprompt</b>	<a href="#">Section 20.3.10</a>
<b>xmyMultiPromptField</b>	NA	<a href="#">Section 20.3.11</a>
<b>xmy_Open</b>	<b>open</b>	<a href="#">Section 20.3.12</a>
<b>xmyRand</b>	<b>rand</b>	<a href="#">Section 20.3.13</a>
<b>xmyReadbreak</b>	<b>read</b>	<a href="#">Section 20.3.14</a>
<b>xmySetZero</b>	NA	<a href="#">Section 20.3.15</a>
<b>xmySubString</b>	<b>substring</b>	<a href="#">Section 20.3.16</a>
<b>xmyTCLTransRE</b>	<b>rematch, adiff, addmask</b>	<a href="#">Section 20.3.17</a>
<b>xmyTrim</b>	<b>trim</b>	<a href="#">Section 20.3.18</a>
<b>xmyTypeOf</b>	<b>typeof</b>	<a href="#">Section 20.3.19</a>

### 20.3.1 xmyEOF / eof

#### Syntax

```
xmy_EOF fp
```

#### Return

1 if EOF  
0 if not EOF

#### Description

The **xmy\_EOF** procedure checks if the last character of a file has been read.

**xmy\_EOF** takes the following attribute

*fp* A file pointer.

#### Example

The MYNAH 4.X code

```
while ( !eof( file_ponter ) )  
    set x = x + 1  
    continue  
endwhile
```

translates to

```
while {! [xmy_EOF $file_ponter]} {  
    incr x 1  
    continue  
}
```

### 20.3.2 **xmyAddMonth / addmonth**

#### **Syntax**

`xmyAddMonth date months`

#### **Return**

The date in seconds after adding months to it

#### **Description**

The **xmyAddMonth** procedure lets you add a number of months to a date.

**xmyAddMonth** takes the following attributes:

*date*      The result of **xmyDate**.

*months*    A number specifying the number of months to be added.

#### **Example**

The MYNAH 4.X code

```
set x = addmonth( today, 3 )
```

which adds 3 months to the current date, translates to

```
xmyAddMonth [xmyDate] 3
```

### 20.3.3 xmyAToN / aton

#### Syntax

`xmyAToN number_string`

#### Return

A number contained in the string, if possible, to convert. Returns a 0 if the conversion fails.

#### Description

The **xmyAToN** procedure emulates FIN/FUR's built-in **aton** function, converting strings to numbers. The value it returns is canonical, but no error checking is done on the input. This is implemented with C's **atof** and **atoi**.

**xmyAToN** takes the following attribute:

***number\_string***     A string having a number in it.

#### Example

The MYNAH 4.X code

```
set x = aton( "09.44e-34" )
```

translates to

```
set x [xmyAToN "09.44e-34"]
```

### 20.3.4 xmyBreakPoint / breakpoint

#### Syntax

```
xmyBreakPoint
```

#### Return

None

#### Description

The **xmyBreakPoint** procedure implements FIN/FUR's **breakpoint** command, letting you insert a break point into a script.

#### Example

The MYNAH 4.X code

```
breakpoint set x aton( "09.44e-34" )
```

translates to

```
xmyBreakpoint; set x [xmyAToN "09.44e-34"]
```

### 20.3.5 xmyCallPrompt / prompt

#### Syntax

```
xmyCallPrompt prompt ?default ?noecho??
```

#### Return

The return value of **xmyPrompt**

#### Description

The **xmyCallPrompt** procedure emulates the FIN/FUR built-in **prompt** function. **xmyCallPrompt** is used mainly by embedded engines.

**xmyCallPrompt** takes the following attributes:

- |                       |   |
|-----------------------|---|
| <b><i>prompt</i></b>  | The string to be used as the prompt   |
| <b><i>default</i></b> | The default value for the variable. If this is not supplied, the default value is an empty string.  |
| <b><i>noecho</i></b>  | Specifies whether or not the input should be echoed. <ul style="list-style-type: none"><li>• <b>1</b> = no echo</li><li>• <b>0</b> = echo</li></ul> |
- Default value = 0.

#### Examples

The MYNAH 4.X code

```
set x = prompt( "prompt_string" )  
set x = prompt( "prompt_string", default )  
set x = prompt( "prompt_string", 0 )  
set x = prompt( "prompt_string", 1 )
```

translates, respectively, to

```
set x [xmyCallPrompt "prompt_string"]  
set x [xmyCallPrompt "prompt_string" $default]  
set x [xmyCallPrompt "prompt_string" 0]  
set x [xmyCallPrompt "prompt_string" 1]
```



### 20.3.6 xmyCallShell / shell

#### Syntax

```
xmyCallShell shell_command
```

#### Return

None

#### Description

The **xmyCallShell** procedure calls a shell command. At run-time, the MYNAH 4.3 **shell "adiff"** command is replaced by the MYNAH 5.3 **xmyCmd diff** method.

**xmyCallShell** takes the following attribute:

***shell\_command*** A string containing the shell command.

#### Example

The MYNAH 4.X code

```
shell "pwd"
```

translates to

```
set xmyReturnCode [xmyCallShell "pwd"]
```

### 20.3.7 xmyExpand / \$

#### Syntax

```
xmyExpand file_name
```

#### Return

An expanded *file\_name* as a string

#### Description

The **xmyExpand** procedure performs environment variable expansion on a string.

**xmyExpand** takes the following attribute:

*file\_name*            A string containing a file name with environment variables.

#### Example

The MYNAH 4.X code

```
set x = $( "$HOME/scripts" )
```

translates to

```
set x [xmyExpand "\$HOME/scripts"]
```

### 20.3.8 xmyFindLibPath ( load )

#### Syntax

```
xmyFindLibFile file
```

#### Return

A string containing the file name with a path

#### Description

The **xmyFindLibFile** procedure looks up a file on `$xmyVar(LibraryPath)`.

In FIN/FUR, the built-in **load** command would use the library path provided in the user's `.Xdefaults` file to search for the script being loaded. To emulate this functionality, the **xmyFindLibFile** procedure uses the `LibraryPath` of the MYNAH 5.X engine as indicated in the configuration file to search for the SE.

**xmyFindLibFile** takes the following attribute:

***file*** A string containing the file name.

#### Example

The MYNAH 4.X code

```
load abc
```

translates to

```
xmySource [xmyFindLibFile "abc.tcl"]
```

### 20.3.9 xmyKeylGetKey / dbget-key

#### Syntax

```
xmyKeylGetKey key
```

#### Return

A string containing the key

#### Description

The **xmyKeylGetKey** procedure returns the key corresponding to the value in the **xmyFinFurDB** keyed list.

**xmyKeylGetKey** takes the following attribute:

*key* The value of a key.

#### Examples

The MYNAH 4.X code

```
set x = multiprompt()
```

translates to

```
set x [xmyMultiPrompt]
```

### 20.3.10 xmyMultiPrompt / multiprompt

#### Syntax

```
xmyMultiPrompt
```

#### Return

1 if you are using an embedded SE  
0 if you are not using an embedded SE

#### Description

The **xmyMultiPrompt** procedure requests input from a user, using the prompts and variables specified by the previous **xmyMultiPromptField** calls. **xmyMultiPrompt** uses **xmy\_PromptArgs** and **xmy\_PromptVars** to get the arguments to **xmyPrompt** and the variables in which to store the results. **xmyMultiPrompt** does nothing if the **xmyVar(EngineType)** is not embedded.

#### Examples

The MYNAH 4.X code

```
set x = multiprompt()
```

translates to

```
set x [xmyMultiPrompt]
```

This example sets two prompts and calls **xmyMultiPrompt**. The password prompt will not be echoed.

```
> xmyMultiPromptField var1 "user name : "  
"mynah"xmyMultiPromptField var2 \  
"password : " " " 1xmyMultiPrompt
```

### 20.3.11 xmyMultiPromptField

#### Syntax

```
xmyMultiPromptField prompt_variable prompt ?default ?noecho??
```

#### Return

None

#### Description

The **xmyMultiPromptField** procedure sets up an additional prompt for the next call to **xmyMultiPrompt**. If you use a background SE, **xmyMultiPromptField** sets *prompt\_variable* to the default value. Otherwise **xmyMultiPromptField** adds the *prompt\_variable* and *prompt* information to the global variables **xmy\_PromptVars** and **xmy\_PromptArgs**, respectively, for use by **xmyMultiPrompt**.

**xmyMultiPromptField** takes the following attributes:

<i>prompt_variable</i>	The variable to be used to store the input for this prompt.
<i>prompt</i>	The string to be used as the prompt.
<i>default</i>	The default value for the variable. If this is not supplied, the default value is an empty string.
<i>noecho</i>	Specifies whether or not the input should be echoed. <ul style="list-style-type: none"><li>• <i>1</i> = no echo</li><li>• <i>0</i> = echo</li></ul> Default value = 0.

#### Examples

The MYNAH 4.X code

```
set x = multiprompt-field( enter_name )  
set x = multiprompt-field( enter_name, default )  
set x = multiprompt-field( enter_name, 0 )  
set x = multiprompt-field( enter_name, 1 )
```

translates, respectively, to

```
xmyMultiPromptField x "enter_name"  
xmyMultiPromptField x "enter_name" $default  
xmyMultiPromptField x "enter_name" 0  
xmyMultiPromptField x "enter_name" 1
```

This example sets two prompts and calls **xmyMultiPrompt**. The password prompt will not be echoed.

```
> xmyMultiPromptField var1 "user name : " "mynah"  
> xmyMultiPromptField var2 "password : " " " 1  
> xmyMultiPrompt
```

### 20.3.12 xmy\_Open / open

#### Syntax

```
xmy_Open file mode
```

#### Return

A file pointer if successful, 0 if failure

#### Description

The **xmy\_Open** procedure opens a file, returning a 0 if the file could not be opened. If the file is opened, **xmy\_Open** returns a file pointer in the format **file\_###**, where **###** is a number.

**xmy\_Open** takes the following attributes:

- file** A string containing the file name.
- mode** Sets the file mode
- **r** = read
  - **w** = write
  - **a** = append

#### Example

The MYNAH 4.X code

```
set x = open( "/tmp/abc", "r" )
```

translates to

```
set x [xmy_Open "/tmp/abc" "r"]
```



### 20.3.13 xmyRand / rand

#### Syntax

```
xmyRand rand_value
```

#### Return

A number

#### Description

The **xmyRand** procedure lets you delete a batch job.

If *rand\_value*

- $\leq 0$ , **xmyRand** returns the next number in a counter.
- $< 0$ , the counter is first initialized to the absolute value of *rand\_value*.
- $= 0$  and the counter has not been accessed before, it is first initialized to the process id. The **xmyRandCounter** variable stores the counter globally.
- $> 0$ , **xmyRand** returns a random number between 0 and *rand\_value* - 1.

**xmyRand** takes the following attribute:

*rand\_value*      A number.

#### Example

The MYNAH 4.X code

```
set x = rand( 1 )  
set x = rand( 0 )  
set x = rand( -1 )
```

translates, respectively, to

```
set x [xmyRand 1]  
set x [xmyRand 0]  
set x [xmyRand [expr {- 1}]]
```

### 20.3.14 xmyReadbreak / read

#### Syntax

```
xmyReadBreak line list_of_vars
```

#### Return

None

#### Description

The **xmyReadBreak** procedure breaks up an input line and places the fields into the variables based on the **xmyReadDelimiter** global variable.

**xmyReadBreak** takes the following attributes:

*line*                    A line containing multiple fields

*list\_of\_vars*          A list of variables

#### Example

The MYNAH 4.X code

```
read fp, variable2
```

translates to

```
xmyReadBreak [gets $fp] {variable2} 0
```

In this example, *fp* is a file pointer. After the statement is executed, the variables *fld1* and *fld2* will contain the first two fields of the input line and *fld3* will contain the remainder of the line.

```
> xmyReadBreak [gets $fp] {fld1 fld2 fld3}
```

### 20.3.15 xmySetZero

#### Syntax

```
xmySetZero array_name subscript op
```

#### Return

None

#### Description

The **xmySetZero** procedure makes sure elements of arrays translated from FIN/FUR have a value of 0 when first accessed. This should be used as a trace procedure on the array.

**xmySetZero** takes the following attributes:

<i>array_name</i>	An array that needs initialization
<i>subscript</i>	A subscript that is valid in Tcl
<i>op</i>	The operation to be performed on the array, which is any combination of the following: <ul style="list-style-type: none"><li>• <i>r</i> = read</li><li>• <i>w</i> = write</li><li>• <i>u</i> = inset</li></ul>

#### Example

When the following statement is executed, Tcl invokes **xmySetZero** with the three arguments whenever the array IntArray is read or unset.

```
> trace variable IntArray ru xmySetZero
```

### 20.3.16 xmySubString / substring

#### Syntax

```
xmySubstring string start ?num_of_char?
```

#### Return

A string that is a substring of the parameter string

#### Description

The **xmySubstring** procedure emulates FIN/FUR's built-in **substring** function and indexes the string from 1 rather than 0.

**xmySubstring** takes the following attributes:

*string*                    The string from which to get the substring.

*start*                    A number specifying the starting position.

*num\_of\_char*            A number specifying the number of characters from the start.

#### Example

The MYNAH 4.X code

```
set x = substr( string, start )  
set x = substr( string, start, 5 )
```

translates, respectively, to

```
set x [xmySubstring $string $start]  
set x [xmySubstring $string $start 5]
```

This example returns *mynah project*.

```
> xmySubstring "the mynah project" 5
```

### 20.3.17 xmyTCLTransRE / (rematch, adiff, addmask)

#### Syntax

```
xmyTCLTransRE reg_expr
```

#### Return

A Tcl regular expression

#### Description

The **xmyTCLTransRE** procedure is used during the translation of **rematch**, **adiff**, and **addmask** to FIN/FUR/ADDAM regular expressions into TCL regular expressions.

**xmyTCLTransRE** takes the following attribute:

*reg\_expr*            A FIN/FUR regular expression.

#### Example

The MYNAH 4.X code

```
rematch( "[a-z]" );
```

translates to

```
regexp [ xmyTCLTransRE "[a-z]" ] [ $handle -data ]
```

### 20.3.18 xmyTrim / trim

#### Syntax

```
xmyTrim string ?mode ?chars??
```

#### Return

The trimmed string

#### Description

The **xmyTrim** procedure emulates FIN/FUR's built-in **trim** function.

**xmyTrim** takes the following attributes:

- string***      The string to be trimmed.
- mode***        A number controlling how the characters are stripped.
- **1** - Strip from the end of the string only
  - **2** - Strip from the beginning of the string only
  - **3** - Strip from both ends of the string only
  - **4** - Strip from the entire string.
- Default = 1.
- chars***        The characters that need to be stripped.
- Default = " ".

#### Example

The MYNAH 4.X code

```
set x = trim( string )  
set x = trim( string, 1 )  
set x = trim( string, 2 )  
set x = trim( string, 3 )  
set x = trim( string, 4 )  
set x = trim( string, mode, "abcd" )
```

translates, respectively, to

```
set x [xmyTrim $string]  
set x [xmyTrim $string 1]  
set x [xmyTrim $string 2]  
set x [xmyTrim $string 3]  
set x [xmyTrim $string 4]  
set x [xmyTrim $string $mode "abcd"]
```

### 20.3.19 xmyTypeOf / typeof

#### Syntax

```
xmyTypeOf any_value
```

#### Return

The type of *any\_value* as a string

#### Description

The **xmyTypeOf** procedure emulates FIN/FUR's built-in **typeof** function.

**xmyTypeOf** takes the following attribute:

<i>any_value</i>	Any value, i.e., an integer, floating point number, string, or file pointer.
------------------	--

#### Example

The MYNAH 4.X code

```
set x = typeof( variable )
```

translates to

```
set x [xmyTypeOf $variable]
```

This example returns *float*.

```
> xmyTypeOf 5.67
```

## 20.4 Converted ADDAM Scripts

This section contains the procedures that were created for working with ADDAM scripts only.

[Table 20-4](#) list the MYNAH 5.3 Tcl procedure, the MYNAH 4.x ADDAM command, and the section where the description of the MYNAH 5.3 Tcl procedure can be found.

**Table 20-4.** ADDAM Commands to MYNAH 5.3 Mappings

MYNAH 5.3 Tcl Procedure	MYNAH 4.x ADDAM Command(s)	Section
<b>checktags</b>	<b>checktags</b>	<a href="#">Section 20.4.1</a>
<b>create_dot_out_file</b>	NA	<a href="#">Section 20.4.2</a>
<b>export</b>	<b>export</b>	<a href="#">Section 20.4.3</a>
<b>extratags</b>	<b>extratags</b>	<a href="#">Section 20.4.4</a>
<b>fcifcomp</b>	<b>fcifcomp</b>	<a href="#">Section 20.4.5</a>
<b>fciffield</b>	<b>fciffield</b>	<a href="#">Section 20.4.6</a>
<b>fcifmatch</b>	<b>fcifmatch</b>	<a href="#">Section 20.4.7</a>
<b>get_parm</b>	NA	<a href="#">Section 20.4.8</a>
<b>postincr</b>	NA	<a href="#">Section 20.4.9</a>
<b>printf</b>	<b>printf</b>	<a href="#">Section 20.4.10</a>
<b>prt3270_connect</b>	NA	<a href="#">Section 20.4.11</a>
<b>readfile</b>	<b>readfile</b>	<a href="#">Section 20.4.12</a>
<b>reorder</b>	<b>reorder</b>	<a href="#">Section 20.4.13</a>
<b>setvl</b>	<b>setvl</b>	<a href="#">Section 20.4.14</a>
<b>soprespc</b>	<b>soprespc</b>	<a href="#">Section 20.4.15</a>
<b>sprintf</b>	<b>sprintf</b>	<a href="#">Section 20.4.16</a>
<b>substr</b>	<b>substr</b>	<a href="#">Section 20.4.17</a>
<b>top_connect</b>	NA	<a href="#">Section 20.4.18</a>
<b>vl</b>	<b>vl</b>	<a href="#">Section 20.4.19</a>
<b>xmyImport</b>	<b>import</b>	<a href="#">Section 20.4.20</a>



## 20.4.1 checktags / checktags

### Syntax

```
checktags handle ?list_of_tags?
```

### Return

Number of additional tags

### Description

The **checktags** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The FCIF **compare** method is used to compare the given FCIF message against the list of tags. The number of additional tags in the FCIF message is returned.

See [Section 14](#) for details on the FCIF **compare** method.

**checktags** takes the following attributes:

- |                     |  |
|---------------------|--|
| <i>handle</i>       | Specifies the connection handle.                       |
| <i>list_of_tags</i> | Specifies an optional list of tags, e.g., {tag1 tag2}. |

### Example

The MYNAH 4.X code

```
checktags( "allowed list1" );
```

translates to

```
checktags $handle "allowed list1"
```

## 20.4.2 create\_dot\_out\_file

### Syntax

```
create_dot_out_file handle
```

### Return

Null

### Description

The **create\_dot\_out\_file** procedure copies the message file pointed to by the connection handle into the file *<script name>.out\_file* in the output directory.

**create\_dot\_out\_file** takes the following attribute:

***handle***                    The connection handle of the desired message file.

### Example

```
> create_dot_out_file $conn1
```

### 20.4.3 export / export

#### Syntax

```
export tag value
```

#### Return

The value *value* added to the symbol table

#### Description

The **export** procedure updates the symbol table with the given *tag* and *value* attributes.

#### Example

The MYNAH 4.X code

```
export( "a", "a" );
```

translates to

```
export "a" "a"
```

#### 20.4.4 extratags / extratags

##### Syntax

```
extratags handle ?list_of_tags?
```

##### Return

Number of additional tags

##### Description

The **extratags** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. FCIF **extraTags** method is used to compare the given FCIF message against the list of tags. The list of additional tags in the FCIF message is returned.

See [Section 14](#) for details on the FCIF **compare** method.

**extratags** takes the following attributes:

<i>handle</i>	Specifies the connection handle.
<i>list_of_tags</i>	Specifies an optional list of tags, e.g., {tag1 tag2}.

##### Example

The MYNAH 4.X code

```
extratags( "allowed list1" );
```

translates to

```
extratags $handle "allowed list1"
```

## 20.4.5 fcifcomp / fcifcomp

### Syntax

```
fcifcomp handle section_name section_number tag offset length \  
         relational_operator value
```

### Return

- 1 - indicates a match but a failed comparison
- 0 - indicates no matches
- 1 - indicates a match and the comparison(s) matched successfully

### Description

The **fcifcomp** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The FCIF **compareTags** method is used to compare the given FCIF message for the given tag against the given value. The return code is set depending on the results of the comparison.

See [Section 14](#) for details on the FCIF **compareTags** method.

**fcifcomp** takes the following attributes:

<i>handle</i>	Specifies the connection handle.
<i>section_name</i>	Description of the tag using the section name.
<i>section_number</i>	Description of the tag using the section number.
<i>tag</i>	Description of the tag using the tag name.
<i>offset</i>	Specifies the number of bytes from the beginning of the section.
<i>length</i>	Specifies the length of the tag.
<i>relational_operator</i>	Specifies the relational operator used when comparing the received value with the expect value.
<i>value</i>	Value against which the received value will be compared.

### Example

The MYNAH 4.X code

```
fcifcomp("CRS",0,"REC.ACL(2).CTID(1)",0,-1,"=",\  
        "TN[2016260422]");
```

translates to

```
fcifcomp $handle "CRS" 0 "REC.ACL(2).CTID(1)" 0 \  
        [ expr - 1 ] "=" "TN\[2016260422\]"
```

## 20.4.6 fciffield / fciffield

### Syntax

```
fciffield handle output section_name section_number \  
         tag offset length
```

### Return

Value of the tag found in the FCIF message

### Description

The **fciffield** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The FCIF **getTag** method is used to get the value of the tag described by the parameter's section name, section number, tag name, offset, and length.

See [Section 14](#) for details on the FCIF **getTag** method.

**fciffield** takes the following attributes:

<i>handle</i>	Specifies the connection handle.
<i>output</i>	Specifies the output containing the value of the requested tag.
<i>section_name</i>	Description of the tag using the section name.
<i>section_number</i>	Description of the tag using the section number.
<i>tag</i>	Description of the tag using the tag name.
<i>offset</i>	Specifies the offset of the tag.
<i>length</i>	Specifies the length of the tag.

### Example

The MYNAH 4.X code

```
fciffield(y,"CRS",0,"REC.ACL(2).ICE(1)",0,-1);
```

translates to

```
fciffield $handle y "CRS" 0 "REC.ACL(2).ICE(1)" 0 [ expr - 1 ]
```

## 20.4.7 fcifmatch / fcifmatch

### Syntax

```
fcifmatch handle function order number suffix
```

### Return

- 0 - if any of the matches fail
- 1 - if all of the matches are successful

### Description

The **fcifmatch** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The message is compared against the following regular expressions:

```
^.....<function>  
^.....<order>  
^.....<number>  
^.....<number>  
^.....<suffix>
```

**fcifmatch** takes the following attributes:

- |                 |  |
|-----------------|--|
| <i>handle</i>   | Specifies the connection handle.                                   |
| <i>function</i> | Specifies the FCIF header function types (positions 6-8).          |
| <i>order</i>    | Specifies the FCIF header order type (position 12).                |
| <i>number</i>   | Specifies the FCIF header order number (positions 13-24 or 15-26). |
| <i>suffix</i>   | Specifies the FCIF header correction suffix (position 21)          |

### Example

The MYNAH 4.X code

```
fcifmatch( " " , " " , "329ADAMS092" , " " );
```

translates to

```
fcifmatch $handle " " " "329ADAMS092" " "
```

## 20.4.8 `get_parm`

### Syntax

```
get_parm parameter_name
```

### Return

Value of the symbol table value  
-1 if the parameter does not exist

### Description

The **`get_parm`** procedure checks if the given parameter exists in the symbol table. If it is found, the corresponding value is returned. Else the local parameter list is searched. If it is found, the corresponding value is returned. Else the global parameter list is searched. If it is found, the corresponding value is returned. Else, -1 is returned.

**`get_parm`** takes the following attribute:

*parameter\_name*     The name of the required parameter.

### Example

```
> get_parm $host_name
```



## 20.4.9 `postincr`

### Syntax

```
postincr variable increment_value
```

### Return

Original value of the variable

### Description

The **postincr** procedure increments the value of the variable by the value of the increment.

**postincr** takes the following attributes:

*variable* Specifies the variable to be incremented.

*increment\_value* Specifies the incremental numeric value.

### Example

```
> postincr $t1 5
```

## 20.4.10 printf / printf

### Syntax

```
printf format arguments
```

### Return

0

### Description

The **printf** procedure formats a string based on the format and arguments supplied. The output is written to stdout.

**printf** takes the following attributes:

<i>format</i>	Specifies the format to be applied to the string.
<i>arguments</i>	Specifies any optional format arguments to be applied to the string.

### Example

The MYNAH 4.X code

```
printf( "%s", "abc" );
```

translates to

```
printf "%s" "abc"
```

## 20.4.11 prt3270\_connect

### Syntax

```
prt3270_connect
```

### Return

PRT3270 connection handle

### Description

The **prt3270\_connect** procedure returns an existing PRT3270 connection handle or if one does not exist, it creates and returns a new PRT3270 connection handle.

If a new connection handle is created, then the protocol handler name is taken from the local runtime. It results in an error if the protocol handler is not defined in the local runtime.

The listen mode attribute for connection is set to the value of the variable **SCRIPT\_START\_TIME**. If this variable is not defined, then the attribute is set to **MSG\_LISTEN\_NOW**.

### Example

```
> prt3270_connect
```

## 20.4.12 readfile / readfile

### Syntax

```
readfile variable filename
```

### Return

null ("") - if the file is not readable  
The file contents if the file is read successfully

### Description

The **readfile** procedure reads the specified file and populates the given Tcl variable.

**readfile** takes the following attributes:

<i>variable</i>	Specifies the Tcl variable to be populated by the contents of the read in file.
<i>filename</i>	Specifies the name of the file to be read.

### Example

The MYNAH 4.X code

```
readfile( y, "/tmp/bryan" );
```

translates to

```
readfile y "/tmp/bryan"
```

### 20.4.13 reorder / reorder

#### Syntax

```
reorder handle aggr_to_reorder ?list_of_tags?
```

#### Return

None

#### Description

The **reorder** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The FCIF **reorder** command is used to reorder the aggregates of both the current and the master FCIF, using the values of tags inside the aggregates to determine the new ordering of the given FCIF message for the given tag against the given value.

See [Section 14](#) for details on the FCIF **reorder** method.

**reorder** takes the following attributes:

<i>handle</i>	Specifies the connection handle.
<i>aggr_to_reorder</i>	Specifies the aggregate to reorder.
<i>list_of_tags</i>	Specifies the tags inside the aggregates that are used to determine the new ordering of the given FCIF message.

#### Example

The MYNAH 4.X code

```
reorder( y, "tag1", "tag2", y, y, y, y, "abc" );
```

translates to

```
reorder $handle $y "tag1" "tag2" $y $y $y $y "abc"
```

#### | 20.4.14 `setvl / setvl`

##### Syntax

```
setvl value
```

##### Return

Value

##### Description

| The `setvl` procedure enters a new tag, called *VL\_OVERRIDE*, in the local runtime tag and sets it to the given *value*.

##### Example

```
> setvl "val_vl"
```

## 20.4.15 `soprespc` / `soprespc`

### Syntax

```
soprespc handle response_code
```

### Return

1 if a match is found, else 0

### Description

The **soprespc** procedure creates an FCIF message handle using the data from the message pointed to by the connection handle. The FCIF **compareTags** method is used to check for a tag "SN" with the given response code.

See [Section 14](#) for details on the FCIF **compareTags** method.

**soprespc** takes the following attributes:

- |                      |   |
|----------------------|---|
| <i>handle</i>        | Specifies the connection handle.                          |
| <i>response_code</i> | Specifies the response code used to check for the SN tag. |

### Example

The MYNAH 4.X code

```
soprespc( "code" );
```

translates to

```
soprespc $handle "code"
```

## 20.4.16 sprintf / printf

### Syntax

```
printf variable format ?arguments?
```

### Return

0

### Description

The **sprintf** procedure formats a string based on the format and arguments supplied. The given Tcl variable contains the formatted string.

**sprintf** takes the following attributes:

- |                  |   |
|------------------|---|
| <i>variable</i>  | Specifies the Tcl variable containing the formatted string.   |
| <i>format</i>    | Specifies the format to be applied to the string.             |
| <i>arguments</i> | Specifies any optional arguments to be applied to the string. |

### Example

The MYNAH 4.X code

```
sprintf( y, "%s %s %d %d %d %d %d", y, "xyz", 5, 6, 7, 8, 9 );
```

translates to

```
sprintf y "%s %s %d %d %d %d %d" $y "xyz" 5 6 7 8 9
```



## 20.4.17 substr / substr

### Syntax

```
substr output_string input_string offset ?length?
```

### Return

Substring value

### Description

The **substr** procedure extracts a substring from the given input string. The substring parameters are offset and length. The extracted substring is returned in the given output string parameter.

**substr** takes the following attributes:

<i>output_string</i>	Specifies the variable that will contain the output string.
<i>input_string</i>	Specifies the input string or a variable containing the input string.
<i>offset</i>	Specifies the substring offset.
<i>length</i>	Specifies the substring length.

### Example

The MYNAH 4.X code

```
substr( y, y, x, x );
```

translates to

```
substr y $y $x $x
```

## | 20.4.18 top\_connect

### Syntax

```
top_connect
```

### Return

TOP connection handle

### Description

The **top\_connect** procedure returns an existing TOP connection handle or if one does not exist, it creates and returns a new TOP connection handle.

| If a new connection handle is created, then the protocol handler name is taken from the local runtime. It results in an error if the protocol handler is not defined in the local runtime.

The listen mode attribute for connection is set to the value of the variable **SCRIPT\_START\_TIME**. If this variable is not defined, then the attribute is set to **MSG\_LISTEN\_NOW**.

### Example

| > top\_connect

## 20.4.19 `vl / vl`

### Syntax

`vl`

### Return

Value of tag `vl` if found, else -1

### Description

The `vl` procedure looks for a tag called `VL` in the symbol table. If the tag is not found, `vl` next looks in the local and global runtime parameters. If the tag is found, the value of the tag is returned. If the tag is not found, nothing is returned.

### Example

The MYNAH 4.X code

```
vl;
```

translates to

```
set val_vl [vl]
```

## 20.4.20 xmyImport / import

### Syntax

```
xmyImport variable_name
```

### Return

Value of passed variable or string if found, else Null ("")

### Description

The **xmyImport** procedure returns the current value of a passed variable. The processing searches for this passed tag value in, in descending order, the Symbol Table, the localruntime array, and the globalruntime array. If it is found in any of these three places, **xmyImport** returns the found value. If it is not found in any of these three places, **xmyImport** returns a NULL ("") value.

### Examples

The MYNAH 4.X code

```
import( y, "w" );
```

translates to

```
set y [ xmyImport "w" ]
```

This example shows returning a value from a passed variable.

```
> set x "tag_1"  
set value1 [ xmyImport $x ]
```

This example shows returning a value from a string.

```
> set value1 [ xmyImport "tag_1" ]
```

## 20.5 Converted Tsf Scripts

This section contains the procedures that were created for working with Tsf scripts only.

[Table 20-4](#) list the MYNAH 5.3 Tcl procedure, the MYNAH 4.x Tsf command, and the section where the description of the MYNAH 5.3 Tcl procedure can be found.

**Table 20-5.** Tsf Commands to MYNAH 5.3 Mappings

MYNAH 5.3 Tcl Procedure	MYNAH 4.x Tsf Command(s)	Section
<code>add_to_syntab_if_not_already_there</code>	NA	<a href="#">Section 20.5.1</a>
<code>send_app_to_app_message</code>	NA	<a href="#">Section 20.5.2</a>
<code>send_script</code>	NA	<a href="#">Section 20.5.3</a>
<code>send_script_and_check_threshold</code>	NA	<a href="#">Section 20.5.4</a>
<code>set_up_parent_script</code>	NA	<a href="#">Section 20.5.5</a>
<code>wait_for_child_scripts</code>	NA	<a href="#">Section 20.5.6</a>
<code>xmyAddToSymTbl</code>	NA	<a href="#">Section 20.5.7</a>
<code>xmyRunTestEvents</code>	NA	<a href="#">Section 20.5.8</a>

### 20.5.1 `add_to_syntab_if_not_already_there`

#### Syntax

```
add_to_syntab_if_not_already_there var value
```

#### Return

None

#### Description

The **`add_to_syntab_if_not_already_there`** procedure adds the specified variable and the corresponding value to the symbol table if the variable does not exist in the symbol table. If the variable exists in the symbol table, nothing is done.

**`add_to_syntab_if_not_already_there`** takes the following attributes:

*var* Specifies the name of the variable.

*value* Specifies the value of the variable.

#### Example

```
> add_to_syntab_if_not_already_there host_name pyibml
```

## 20.5.2 send\_app\_to\_app\_message

### Syntax

```
send_app_to_app_message handle script ?attributes?
```

### Return

An error if the send fails, else “success”

### Description

The **send\_app\_to\_app\_message** procedure processes the given Template script by substituting the variable names with values from the symbol table. The processed message is sent to the protocol handler using the given connection handle. The optional **send** attributes are used by the **send** method.

**send\_app\_to\_app\_message** takes the following attributes:

<i>handle</i>	Specifies the connection handle.
<i>script</i>	Specifies the name of the template script to be processed.
<i>attributes</i>	Specifies the optional attributes to be sent to the handle.

### Example

```
> send_app_to_app_message $conn1 /u/madmin/scripts/sl
```

### 20.5.3 send\_script

#### Syntax

```
send_script se_group script ?attributes?
```

#### Return

The string the child script execution returns

#### Description

The **send\_script** procedure sets the given attributes as local run time in the symbol table. It also sets the script start time in the local run time, if the tag exists in the local run time. The given script is sent to the given SE Group for processing or it is locally processed if single engine execution is specified.

The return code resulting from the child script execution is returned.

**send\_script** takes the following attributes:

<i>se_group</i>	Specifies the SE Group processing the script.
<i>script</i>	Specifies the name of the script to be sent to the SE Group.
<i>attributes</i>	Specifies any optional attributes to be set in the symbol table.

#### Example

```
> send_script SeGpl /opt/SUNWmyn/scripts/sl.tcl
```



## 20.5.4 send\_script\_and\_check\_threshold

### Syntax

```
send_script_and_check_threshold se_group script ?attributes?
```

### Return

The string "success" if the child script succeeds. The script terminates in case of an error and the error count exceeds a given threshold.

### Description

The **send\_script\_and\_check\_threshold** procedure sets the given attributes as local run time in the symbol table. It also sets the script start time in the local run time, if the tag exists in the local run time. The given script is sent to the given SE Group for processing or it is locally processed if single engine execution is specified.

If the given script execution fails, then the error count is incremented. If the error count exceeds the given threshold, then the script execution terminates. Else "success" is returned.

**send\_script\_and\_check\_threshold** takes the following attributes:

<i>se_group</i>	Specifies the SE Group processing the script.
<i>script</i>	Specifies the name of the child script to be sent to the SE Group.
<i>attributes</i>	Specifies any optional attributes to be set in the symbol table.

### Example

```
> send_script_and_check_threshold \  
    SeGp1 /opt/SUNWmyn/scripts/s1.tcl
```

## 20.5.5 set\_up\_parent\_script

### Syntax

```
set_up_parent_script threshold_limit user_db_file_name
```

### Return

Null ("")

### Description

The **set\_up\_parent\_script** procedure adds the specified threshold limit to the symbol table. **set\_up\_parent\_script** also read the specified user *db* file.

**set\_up\_parent\_script** takes the following attributes:

<i>threshold_limit</i>	Specifies the threshold limit to be added to the symbol table. Default = 0.
<i>user_db_file_name</i>	Specifies the name of the user database file. Default = "" (null).

### Example

```
> set_up_parent_script 1 /opt/SUNWmyn/mynah_home/data/userdb
```

## 20.5.6 wait\_for\_child\_scripts

### Syntax

```
wait_for_child_scripts msg_handles_list
```

### Return

Exits if the threshold is exceeded, else returns Null ("")

### Description

The **wait\_for\_child\_scripts** procedure waits for the child scripts, specified in the list of message handles, to complete. If any of the message handles fails, the script threshold count is increased. If the count is greater than the threshold limit, all child scripts specified in the list of message handles are cancelled and the parent script exits with the string *exceeded threshold*.

**wait\_for\_child\_scripts** takes the following attribute:

*msg\_handles\_list*    The list of message handles.

### Example

```
> wait_for_child_scripts $mh set mh {m1 m2 m3 m4}
```

## 20.5.7 xmyAddToSymTbl

### Syntax

```
xmyAddToSymTbl list_of_variable/value_pairs
```

### Return

None

### Description

The **xmyAddToSymTbl** procedure updates the symbol table with the given variable/value pairs if the given variable does not already exist in the symbol table.

**xmyAddToSymTbl** takes the following attribute:

*list\_of\_variable/value\_pairs*      Sets of variables and values to be added to the symbol table.

### Example

```
> xmyAddToSymTbl {  
  { X_RCOMB "1.9"      }  
  { X_TECH   "KYL"     }  
  { X_CNTR   "SCRIPTCTR" }  
  { X_do-center "sctr"  }  
  { X_do-signon "tph"   }  
  { X_do-password "1234tomh" }  
  { X_JOBID1 "x"       }  
  { X_SEQ1   "x"       }  
}
```

## 20.5.8 xmyRunTestEvents

### Syntax

```
xmyRunTestEvents list_of_events
```

### Return

None

### Description

The **xmyRunTestEvents** procedure processes a Tcl list of "events" that look similar to the statements found in a 4.3 TSF (Test Specification File).

The test events can be of the following types:

- Any event starting with "~" is treated as a comment and is ignored.
- **testcase begin**: To signify the beginning of a test case. This is equivalent to **xmyBegin** method, e.g.,  
{testcase 3178 begin}.
- **testcase end**: To signify the ending of a test case. This is equivalent to the **xmyEnd** method, e.g.,  
{testcase 3178 end}.
- **3270**: Represents a 3270 testlet to be executed, e.g.,  
{step 9999 3270 \$se\_Gp01 \$P1/logout.fur.tcl {}}.
- The step is identified by a numeric id, followed by the SE Group in which this script should be executed, followed by the *testletscript* which needs to be executed.
- **ASync**: Represents an ASync testlet to be executed, e.g.,  
{step 9999 ASync \$se\_Gp01 \$P2/f02.fin.tcl {}}.
- The step is identified by a numeric id, followed by the SE Group in which this script should be executed, followed by the *testletscript* that needs to be executed.
- **SND**: Represents a TOPCOM message which needs to be sent, e.g.,  
{step 9999 SND \$ph\_sndDCI \$P2/RVWBLK03}.
- The step is identified by a numeric id, followed by the TOPCOM protocol handler to which the message is to be sent, followed by the filename that contains the message to be sent.
- **RCV**: Means that a TOPCOM message needs to be received, e.g.,  
{step 9999 RCV \$se\_Gp02 \$P2/RVWBLK03.spec.tcl\  
{protocol\_handler "prtDCI"}}.

- The step is identified by a numeric id, followed by the SE Group in which this script should be executed, followed by the testlet name that has the logic to do the TOPCOM receive, followed by the protocol handler name that should be used for the TOPCOM receive.
- **DCE:** Represents a DCE testlet to be executed, e.g.,  
{step 9999 DCE \$se\_Gp01 \$P2/f02.fin.tcl {}}.
- The step is identified by a numeric id, followed by the SE Group in which this script should be executed, followed by the *testletscript* that needs to be executed.

**xmyRunTestEvents** takes the following attribute:

*list\_of\_events*            A list of events.

### Example

```
> xmyRunTestEvents {
  {testcase 3178 begin}
  {step 10 3270 $se_group $P1/child_script_1 \
    {{X_ims-wfado "SL3"} {X_logdata "abc def_ghi"}}}
  {testcase 3178 end}
  {~step 180 SND $se_group $P1/RVWBLK01}
}
```

## Appendix A: Basic Tcl Commands

This Appendix contains hard copy versions of the manual pages for the the basic Tcl commands.

As in Section 6, in this Appendix the terms *fileName* and *fileId* are used. While they seem similar, possibly synonymous, they are very different.

*fileName* is the name of a file in the operating system, and *fileId* is an identifier Tcl creates when you open *fileName* using the **open** (Appendix A.39) command; *fileId* is a handle to the open *fileName*. For example, assume you have a file called *Login\_script1* and you want to open it. You could type the following:

```
> open Login_script1  
file3
```

*Login\_script1* is a *fileName* and **file3** is a *fileId*. As with all handles, you can assign a *fileId* to a variable, such as in

```
> set x [open Login_script1]  
file3
```

## A.1 **append**

### Syntax

```
append varName value ?value value ...?
```

### Description

The **append** command appends all of the *value* arguments to the current value of variable **varName**. If **varName** doesn't exist, it is given a value equal to the concatenation of all the *value* arguments. This command provides an efficient way to build up long variables incrementally. For example

```
append a $b
```

is much more efficient than

```
set a $a$b
```

if **\$a** is long.



## A.2 array

### Syntax

```
array option arrayName ?arg arg ...?
```

### Description

The **array** command performs one of several operations on the variable given by *arrayName*. *arrayname* must be the name of an existing array variable. The **option** argument determines what action is carried out by the command. The legal **options** (which may be abbreviated) are:

**array anymore** *arrayName searchId*

Returns 1 if there are any more elements left to be processed in an array search, 0 if all elements have already been returned. *SearchId* indicates which search on *arrayName* to check, and must have been the return value from a previous invocation of **array startsearch**. This option is particularly useful if an array has an element with an empty name, since the return value from **array nextelement** won't indicate whether the search has been completed.

**array donesearch** *arrayName searchId*

This command terminates an array search and destroys all the state associated with that search. *SearchId* indicates which search on *arrayName* to destroy, and must have been the return value from a previous invocation of **array startsearch**. Returns an empty string.

**array names** *arrayName*

Returns a list containing the names of all of the elements in the array. If there are no elements in the array then an empty string is returned.

**array nextelement** *arrayName searchId*

Returns the name of the next element in *arrayName*, or an empty string if all elements of *arrayName* have already been returned in this search. The *searchId* argument identifies the search, and must have been the return value of an **array startsearch** command. Warning: if elements are added to or deleted from the array, then all searches are automatically terminated just as if **array donesearch** had been invoked; this will cause **array nextelement** operations to fail for those searches.

**array size** *arrayName*

Returns a decimal string giving the number of elements in the array.

**array startsearch** *arrayName*

This command initializes an element-by-element search through the array given by *arrayName*, such that invocations of the **array nextelement** command will return the names of the individual elements in the array. When the search has been completed, the **array donesearch** command should be invoked. The return value is a search identifier that must be used in **array nextelement** and **array donesearch** commands; it allows multiple searches to be underway simultaneously for the same array.

## A.3 break

### Syntax

```
break
```

### Description

The **break** command may be invoked only inside the body of a looping command such as **for** or **foreach** or **while**. It returns a `TCL_BREAK` code to signal the innermost containing loop command to return immediately.

## A.4 case

### Syntax

```
case string ?in? patList body ?patList body ...?  
case string ?in? {patList body ?patList body ...?}
```

### Description

**NOTE** — The **case** command is obsolete and is supported only for backward compatibility. At some point in the future it may be removed entirely. You should use the **switch** command instead.

The **case** command matches *string* against each of the *patList* arguments in order. Each *patList* argument is a list of one or more patterns. If any of these patterns matches *string* then **case** evaluates the following *body* argument by passing it recursively to the Tcl interpreter and returns the result of that evaluation. Each *patList* argument consists of a single pattern or list of patterns. Each pattern may contain any of the wild-cards described under **string match**. If a *patList* argument is **default**, the corresponding body will be evaluated if no *patList* matches *string*. If no *patList* argument matches *string* and no default is given, then the **case** command returns an empty string.

Two syntaxes are provided for the *patList* and *body* arguments. The first uses a separate argument for each of the patterns and commands; this form is convenient if substitutions are desired on some of the patterns or commands. The second form places all of the patterns and commands together into a single argument; the argument must have proper list structure, with the elements of the list being the patterns and commands. The second form makes it easy to construct multi-line case commands, since the braces around the whole list make it unnecessary to include a backslash at the end of each line. Since the *patList* arguments are in braces in the second form, no command or variable substitutions are performed on them; this makes the behavior of the second form different than the first form in some cases.

## A.5 catch

### Syntax

```
catch script ?varName?
```

### Description

The **catch** command may be used to prevent errors from aborting command interpretation. **catch** calls the Tcl interpreter recursively to execute *script*, and always returns a TCL\_OK code, regardless of any errors that might occur while executing *script*. The return value from **catch** is a decimal string giving the code returned by the Tcl interpreter after executing *script*. This will be 0 (TCL\_OK) if there were no errors in *script*; otherwise it will have a non-zero value corresponding to one of the exceptional return codes (see tcl.h for the definitions of code values). If the *varName* argument is given, then it gives the name of a variable; **catch** will set the variable to the string returned from *script* (either a result or an error message).

## A.6 cd

### Syntax

```
cd ?dirName?
```

### Description

**cd** change the current working directory to *dirName*, or to the home directory (as specified in the HOME environment variable) if *dirName* is not given. If *dirName* starts with a tilde, then tilde-expansion is done as described for **Tcl\_TildeSubst**. Returns an empty string.

## A.7 close

### Syntax

```
close fileId
```

### Description

Closes the file given by *fileId*. *fileid* must be the return value from a previous invocation of the **open** command; after this command, it should not be used anymore. If *fileId* refers to a command pipeline instead of a file, then **close** waits for the children to complete. The normal result of this command is an empty string, but errors are returned if there are problems in closing the file or waiting for children to complete.

## A.8 concat

### Syntax

```
concat ?arg arg ...?
```

### Description

This command treats each argument as a list and concatenates them into a single list. It also eliminates leading and trailing spaces in the *arg*'s and adds a single separator space between *arg*'s. It permits any number of arguments. For example, the command

```
concat a b {c d e} {f {g h}}
```

will return

```
a b c d e f {g h}
```

as its result.

If no *args* are supplied, the result is an empty string.



## A.9 continue

### Syntax

```
continue
```

### Description

The **continue** command may be invoked only inside the body of a looping command such as **for** or **foreach** or **while**. It returns a `TCL_CONTINUE` code to signal the innermost containing loop command to skip the remainder of the loop's body but continue with the next iteration of the loop.

## A.10 eof

### Syntax

```
eof fileId
```

### Description

The **eof** command returns 1 if an end-of-file condition has occurred on *fileId*, 0 otherwise. *fileid* must have been the return value from a previous call to **open**, or it may be **stdin**, **stdout**, or **stderr** to refer to one of the standard I/O channels.

## A.11 error

### Syntax

```
error message ?info? ?code?
```

### Description

Returns a `TCL_ERROR` code, which causes command interpretation to be unwound. *Message* is a string that is returned to the application to indicate what went wrong.

If the *info* argument is provided and is non-empty, it is used to initialize the global variable **errorInfo**. **errorInfo** is used to accumulate a stack trace of what was in progress when an error occurred; as nested commands unwind, the Tcl interpreter adds information to **errorInfo**. If the *info* argument is present, it is used to initialize **errorInfo** and the first increment of unwind information will not be added by the Tcl interpreter. In other words, the command containing the **error** command will not appear in **errorInfo**; in its place will be *info*. This feature is most useful in conjunction with the **catch** command: if a caught error cannot be handled successfully, *info* can be used to return a stack trace reflecting the original point of occurrence of the error:

```
catch {...} errMsg set savedInfo $errorInfo ... error \  
$errMsg $savedInfo
```

If the *code* argument is present, then its value is stored in the **errorCode** global variable. This variable is intended to hold a machine-readable description of the error in cases where such information is available; see the section BUILT-IN VARIABLES below for information on the proper format for the variable. If the *code* argument is not present, then **errorCode** is automatically reset to “NONE” by the Tcl interpreter as part of processing the error generated by the command.

## A.12 eval

### Syntax

```
eval arg ?arg ...?
```

### Description

The **eval** command concatenates all its arguments in the same fashion as the **concat** command, passes the concatenated string to the Tcl interpreter recursively, and returns the result of that evaluation (or any error generated by it). **eval** takes one or more arguments, which together comprise a Tcl script containing one or more commands.

## A.13 `exec`

### Syntax

```
exec ?switches? arg ?arg ...?
```

### Description

The **exec** command treats its arguments as the specification of one or more subprocesses to execute. The arguments take the form of a standard shell pipeline where each *arg* becomes one word of a command, and each distinct command becomes a subprocess.

If the initial arguments to **exec** start with `-` then they are treated as command-line switches and are not part of the pipeline specification. The following switches are currently supported:

- keepnewline** Retains a trailing newline in the pipeline's output. Normally a trailing newline will be deleted.
- Marks the end of switches. The argument following this one will be treated as the first arg even if it starts with a `-`.

If an *arg* (or pair of *arg*'s) has one of the forms described below then it is used by **exec** to control the flow of input and output among the subprocess(es). Such arguments will not be passed to the subprocess(es). In forms such as “`<fileName`” *fileName* may either be in a separate argument from “`<`” or in the same argument with no intervening space (i.e. “`<fileName`”).

- |** Separates distinct commands in the pipeline. The standard output of the preceding command will be piped into the standard input of the next command.
- |\&** Separates distinct commands in the pipeline. Both standard output and standard error of the preceding command will be piped into the standard input of the next command. This form of redirection overrides forms such as `2>` and `>&`.
- <fileName** The file named by *fileName* is opened and used as the standard input for the first command in the pipeline.
- <@fileId** *fileId* must be the identifier for an open file, such as the return value from a previous call to **open**. It is used as the standard input for the first command in the pipeline. *FileId* must have been opened for reading.
- <<value** *Value* is passed to the first command as its standard input.
- >fileName** Standard output from the last command is redirected to the file named *fileName*, overwriting its previous contents.

- 2> fileName* Standard error from all commands in the pipeline is redirected to the file named *fileName*, overwriting its previous contents.
- >& fileName* Both standard output from the last command and standard error from all commands are redirected to the file named *fileName*, overwriting its previous contents.
- >> fileName* Standard output from the last command is redirected to the file named *fileName*, appending to it rather than overwriting it.
- 2>> fileName* Standard error from all commands in the pipeline is redirected to the file named *fileName*, appending to it rather than overwriting it.
- >>& fileName* Both standard output from the last command and standard error from all commands are redirected to the file named *fileName*, appending to it rather than overwriting it.
- >@ fileId* **fileid** must be the identifier for an open file, such as the return value from a previous call to **open**. Standard output from the last command is redirected to *fileId*'s file, which must have been opened for writing.
- 2>@ fileId* **fileid** must be the identifier for an open file, such as the return value from a previous call to **open**. Standard error from all commands in the pipeline is redirected to *fileId*'s file. The file must have been opened for writing.
- >&@ fileId* **fileid** must be the identifier for an open file, such as the return value from a previous call to **open**. Both standard output from the last command and standard error from all commands are redirected to *fileId*'s file. The file must have been opened for writing.

If standard output has not been redirected then the **exec** command returns the standard output from the last command in the pipeline. If any of the commands in the pipeline exit abnormally or are killed or suspended, then **exec** will return an error and the error message will include the pipeline's output followed by error messages describing the abnormal terminations; the **errorCode** variable will contain additional information about the last abnormal termination encountered. If any of the commands writes to its standard error file and that standard error isn't redirected, then **exec** will return an error; the error message will include the pipeline's standard output, followed by messages about abnormal terminations (if any), followed by the standard error output.

If the last character of the result or error message is a newline then that character is normally deleted from the result or error message. This is consistent with other Tcl return values, which don't normally end with newlines.

However, if **-keepnewline** is specified then the trailing newline is retained.

If standard input isn't redirected with “<” or “<<” or “<@” then the standard input for the first command in the pipeline is taken from the application's current standard input.

If the last *arg* is “&” then the pipeline will be executed in background. In this case the **exec** command will return a list whose elements are the process identifiers for all of the subprocesses in the pipeline.

The standard output from the last command in the pipeline will go to the application's standard output if it hasn't been redirected, and error output from all of the commands in the pipeline will go to the application's standard error file unless redirected.

The first word in each command is taken as the command name; tilde-substitution is performed on it, and if the result contains no slashes then the directories in the PATH environment variable are searched for an executable by the given name. If the name contains a slash then it must refer to an executable reachable from the current directory. No “glob” expansion or other shell-like substitutions are performed on the arguments to commands.

## A.14 exit

### Syntax

```
exit ?returnCode?
```

### Description

Terminate the process, returning *returnCode* to the system as the exit status. If *returnCode* isn't specified then it defaults to 0.



## A.15 `expr`

### Syntax

```
expr arg ?arg arg ...?
```

### Description

Concatenates *arg*'s (adding separator spaces between them), evaluates the result as a Tcl expression, and returns the value.

The operators permitted in Tcl expressions are a subset of the operators permitted in C expressions, and they have the same meaning and precedence as the corresponding C operators. Expressions almost always yield numeric results (integer or floating-point values). For example, the expression

```
expr 8.2 + 6
```

evaluates to 14.2. Tcl expressions differ from C expressions in the way that operands are specified. Also, Tcl expressions support non-numeric operands and string comparisons.

### Operands

A Tcl expression consists of a combination of operands, operators, and parentheses. White space may be used between the operands and operators and parentheses; it is ignored by the expression processor. Where possible, operands are interpreted as integer values. Integer values may be specified in decimal (the normal case), in octal (if the first character of the operand is **0**), or in hexadecimal (if the first two characters of the operand are **0x**). If an operand does not have one of the integer formats given above, then it is treated as a floating-point number if that is possible. Floating-point numbers may be specified in any of the ways accepted by an ANSI-compliant C compiler (except that the 'f', 'F', 'l', and 'L' suffixes will not be permitted in most installations). For example, all of the following are valid floating-point numbers: 2.1, 3., 6e4, 7.91e+16. If no numeric interpretation is possible, then an operand is left as a string (and only a limited set of operators may be applied to it).

Operands may be specified in any of the following ways:

- [1] As an numeric value, either integer or floating-point.
- [2] As a Tcl variable, using standard `$` notation. The variable's value will be used as the operand.
- [3] As a string enclosed in double-quotes. The expression parser will perform backslash, variable, and command substitutions on the information between the quotes, and use the resulting value as the operand
- [4] As a string enclosed in braces. The characters between the open brace and matching close brace will be used as the operand without any substitutions.

- [5] As a Tcl command enclosed in brackets. The command will be executed and its result will be used as the operand.
- [6] As a mathematical function whose arguments have any of the above forms for operands, such as “**sin(\$x)**”. See below for a list of defined functions.

Where substitutions occur above (e.g. inside quoted strings), they are performed by the expression processor. However, an additional layer of substitution may already have been performed by the command parser before the expression processor was called. As discussed below, it is usually best to enclose expressions in braces to prevent the command parser from performing substitutions on the contents.

For some examples of simple expressions, suppose the variable **a** has the value 3 and the variable **b** has the value 6. Then the command on the left side of each of the lines below will produce the value on the right side of the line:

```
expr 3.1 + $a           6.1
expr 2 + "$a.$b"       5.6
expr 4* [llength "6 2"] 8
expr {{word one} < "word $a"} 0
```

## Operators

The valid operators are listed below, grouped in decreasing order of precedence:

- ~ !**           Unary minus, bit-wise NOT, logical NOT. None of these operands may be applied to string operands, and bit-wise NOT may be applied only to integers.
- \* / %**           Multiply, divide, remainder. None of these operands may be applied to string operands, and remainder may be applied only to integers.  
The remainder will always have the same sign as the divisor and an absolute value smaller than the divisor.
- + -**            Add and subtract. Valid for any numeric operands.
- << >>**           Left and right shift. Valid for integer operands only.
- < > <= >=**       Boolean less, greater, less than or equal, and greater than or equal. Each operator produces 1 if the condition is true, 0 otherwise. These operators may be applied to strings as well as numeric operands, in which case string comparison is used.
- == !=**           Boolean equal and not equal. Each operator produces a zero/one result. Valid for all operand types.
- &**                Bit-wise AND. Valid for integer operands only.
- ^**                Bit-wise exclusive OR. Valid for integer operands only.

---

	Bit-wise OR. Valid for integer operands only.
&&	Logical AND. Produces a 1 result if both operands are non-zero, 0 otherwise. Valid for numeric operands only (integers or floating-point).
	Logical OR. Produces a 0 result if both operands are zero, 1 otherwise. Valid for numeric operands only (integers or floating-point).
x?:y:z	If-then-else, as in C. If <i>x</i> evaluates to non-zero, then the result is the value of <i>y</i> . Otherwise the result is the value of <i>z</i> . The <i>x</i> operand must have a numeric value.

See the C manual for more details on the results produced by each operator. All of the binary operators group left-to-right within the same precedence level. For example, the command

```
expr 4*2 < 7
```

returns 0.

The **&&**, **||**, and **?:** operators have “lazy evaluation”, just as in C, which means that operands are not evaluated if they are not needed to determine the outcome. For example, in the command

```
expr {$v ? [a] : [b]}
```

only one of **[a]** or **[b]** will actually be evaluated, depending on the value of **\$v**. Note, however, that this is only true if the entire expression is enclosed in braces; otherwise the Tcl parser will evaluate both **[a]** and **[b]** before invoking the **expr** command.

## Math Functions

Tcl supports the following mathematical functions in expressions:

**acos** **cos** **hypot** **sinh** **asincosh** **log** **sqrt** **atanexp** **log10** **tan** **atan2**  
**floor** **pow** **tanh** **ceil** **mod** **sin**

Each of these functions invokes the math library function of the same name; see the manual entries for the library functions for details on what they do. Tcl also implements the following functions for conversion between integers and floating-point numbers:

<b>abs</b> ( <i>arg</i> )	Returns the absolute value of <i>arg</i> . <i>Arg</i> may be either integer or floating-point, and the result is returned in the same form.
<b>double</b> ( <i>arg</i> )	If <i>arg</i> is a floating value, returns <i>arg</i> , otherwise converts <i>arg</i> to floating and returns the converted value.
<b>int</b> ( <i>arg</i> )	If <i>arg</i> is an integer value, returns <i>arg</i> , otherwise converts <i>arg</i> to integer by truncation and returns the converted value.

---

**round(*arg*)** If *arg* is an integer value, returns *arg*, otherwise converts *arg* to integer by rounding and returns the converted value.

In addition to these predefined functions, applications may define additional functions using **Tcl\_CreateMathFunc()**.

### Types, Overflow, and Precision

All internal computations involving integers are done with the C type *long*, and all internal computations involving floating-point are done with the C type *double*. When converting a string to floating-point, exponent overflow is detected and results in a Tcl error. For conversion to integer from string, detection of overflow depends on the behavior of some routines in the local C library, so it should be regarded as unreliable. In any case, integer overflow and underflow are generally not detected reliably for intermediate results. Floating-point overflow and underflow are detected to the degree supported by the hardware, which is generally pretty reliable.

Conversion among internal representations for integer, floating-point, and string operands is done automatically as needed. For arithmetic computations, integers are used until some floating-point number is introduced, after which floating-point is used. For example,

```
expr 5 / 4
```

returns 1, while

```
expr 5 / 4.0 expr 5 / ( [string length "abcd"] + 0.0 )
```

both return 1.25.

Floating-point values are always returned with a “.” or an “e” so that they will not look like integer values. For example,

```
expr 20.0/5.0
```

returns “4.0”, not “4”. The global variable **tcl\_precision** determines the the number of significant digits that are retained when floating values are converted to strings (except that trailing zeroes are omitted). If **tcl\_precision** is unset then 6 digits of precision are used. To retain all of the significant bits of an IEEE floating-point number set **tcl\_precision** to 17; if a value is converted to string with 17 digits of precision and then converted back to binary for some later calculation, the resulting binary value is guaranteed to be identical to the original one.

### String Operations

String values may be used as operands of the comparison operators, although the expression evaluator tries to do comparisons as integer or floating-point when it can. If one of the operands of a comparison is a string and the other has a numeric value, the numeric operand is converted back to a string using the C *sprintf* format specifier **%d** for integers and **%g** for floating-point values. For example, the commands

```
expr {"0x03" > "2"} expr {"0y" < "0x12"}
```

both return 1. The first comparison is done using integer comparison, and the second is done using string comparison after the second operand is converted to the string "18".

## A.16 file

### Syntax

```
file option name ?arg arg ...?
```

### Description

The **file** command provides several operations on a file's name or attributes. *name* is the name of a file; if it starts with a tilde, then tilde substitution is done before executing the command (see the manual entry for **Tcl\_TildeSubst** for details). *Option* indicates what to do with the file name. Any unique abbreviation for *option* is acceptable. The valid options are:

**file atime** *name*

Returns a decimal string giving the time at which file *name* was last accessed. The time is measured in the standard POSIX fashion as seconds from a fixed starting time (often January 1, 1970). If the file doesn't exist or its access time cannot be queried then an error is generated.

**file dirname** *name*

Returns all of the characters in *name* up to but not including the last slash character. If there are no slashes in *name* then returns `“.”`. If the last slash in *name* is its first character, then return `“/”`.

**file executable** *name*

Returns **1** if file *name* is executable by the current user, **0** otherwise.

**file exists** *name*

Returns **1** if file *name* exists and the current user has search privileges for the directories leading to it, **0** otherwise.

**file extension** *name*

Returns all of the characters in *name* after and including the last dot in *name*. If there is no dot in *name* then returns the empty string.

**file isdirectory** *name*

Returns **1** if file *name* is a directory, **0** otherwise.

**file isfile** *name*

Returns **1** if file *name* is a regular file, **0** otherwise.

**file lstat** *name varName*

Same as **stat** option (see below) except uses the *lstat* kernel call instead of *stat*. This means that if *name* refers to a symbolic link the information returned in *varName* is for the link rather than the

file it refers to. On systems that don't support symbolic links this option behaves exactly the same as the **stat** option.

**file mtime** *name*

Returns a decimal string giving the time at which file *name* was last modified. The time is measured in the standard POSIX fashion as seconds from a fixed starting time (often January 1, 1970). If the file doesn't exist or its modified time cannot be queried then an error is generated.

**file owned** *name*

Returns **1** if file *name* is owned by the current user, **0** otherwise.

**file readable** *name*

Returns **1** if file *name* is readable by the current user, **0** otherwise.

**file readlink** *name*

Returns the value of the symbolic link given by *name* (i.e. the name of the file it points to). If *name* isn't a symbolic link or its value cannot be read, then an error is returned. On systems that don't support symbolic links this option is undefined.

**file rootname** *name*

Returns all of the characters in *name* up to but not including the last "." character in the name. If *name* doesn't contain a dot, then returns *name*.

**file size** *name*

Returns a decimal string giving the size of file *name* in bytes. If the file doesn't exist or its size cannot be queried then an error is generated.

**file stat** *name varName*

Invokes the **stat** kernel call on *name*, and uses the variable given by *varName* to hold information returned from the kernel call. *VarName* is treated as an array variable, and the following elements of that variable are set: **atime**, **ctime**, **dev**, **gid**, **ino**, **mode**, **mtime**, **nlink**, **size**, **type**, **uid**. Each element except **type** is a decimal string with the value of the corresponding field from the **stat** return structure; see the manual entry for **stat** for details on the meanings of the values. The **type** element gives the type of the file in the same form returned by the command **file type**. This command returns an empty string.

**file tail** *name*

Returns all of the characters in *name* after the last slash. If *name* contains no slashes then returns *name*.

**file type** *name*

Returns a string giving the type of file *name*, which will be one of **file**, **directory**, **characterSpecial**, **blockSpecial**, **fifo**, **link**, or **socket**.

**file writable** *name*

Returns **1** if file *name* is writable by the current user, **0** otherwise.



## A.17 flush

### Syntax

```
flush fileId
```

### Description

Flushes any output that has been buffered for *fileId*. *fileId* must have been the return value from a previous call to **open**, or it may be **stdout** or **stderr** to access one of the standard I/O streams; it must refer to a file that was opened for writing. The command returns an empty string.

## A.18 for

### Syntax

```
for start test next body
```

### Description

**for** is a looping command, similar in structure to the C **for** statement. The *start*, *next*, and *body* arguments must be Tcl command strings, and *test* is an expression string. The **for** command first invokes the Tcl interpreter to execute *start*. Then it repeatedly evaluates *test* as an expression; if the result is non-zero it invokes the Tcl interpreter on *body*, then invokes the Tcl interpreter on *next*, then repeats the loop. The command terminates when *test* evaluates to 0. If a **continue** command is invoked within *body* then any remaining commands in the current execution of *body* are skipped; processing continues by invoking the Tcl interpreter on *next*, then evaluating *test*, and so on. If a **break** command is invoked within *body* or *next*, then the **for** command will return immediately. The operation of **break** and **continue** are similar to the corresponding statements in C. **For** returns an empty string.

## A.19 foreach

### Syntax

```
foreach varname list body
```

### Description

In this command *varname* is the name of a variable, *list* is a list of values to assign to *varname*, and *body* is a Tcl script. For each element of *list* (in order from left to right), **foreach** assigns the contents of the field to *varname* as if the **lindex** command had been used to extract the field, then calls the Tcl interpreter to execute *body*. The **break** and **continue** statements may be invoked inside *body*, with the same effect as in the **for** command. **Foreach** returns an empty string.

## A.20 format

### Syntax

```
format formatString ?arg arg ...?
```

### Description

This command generates a formatted string in the same way as the ANSI C **sprintf** procedure (it uses **sprintf** in its implementation). *FormatString* indicates how to format the result, using % conversion specifiers as in **sprintf**, and the additional arguments, if any, provide values to be substituted into the result. The return value from **format** is the formatted string.

### Details On Formatting

The command operates by scanning *formatString* from left to right. Each character from the format string is appended to the result string unless it is a percent sign. If the character is a % then it is not copied to the result string. Instead, the characters following the % character are treated as a conversion specifier. The conversion specifier controls the conversion of the next successive *arg* to a particular format and the result is appended to the result string in place of the conversion specifier. If there are multiple conversion specifiers in the format string, then each one controls the conversion of one additional *arg*. The **format** command must be given enough *args* to meet the needs of all of the conversion specifiers in *formatString*.

Each conversion specifier may contain up to six different parts: an XPG3 position specifier, a set of flags, a minimum field width, a precision, a length modifier, and a conversion character. Any of these fields may be omitted except for the conversion character. The fields that are present must appear in the order given above. The paragraphs below discuss each of these fields in turn.

If the % is followed by a decimal number and a \$, as in “%2\$d”, then the value to convert is not taken from the next sequential argument. Instead, it is taken from the argument indicated by the number, where 1 corresponds to the first *arg*. If the conversion specifier requires multiple arguments because of \* characters in the specifier then successive arguments are used, starting with the argument given by the number. This follows the XPG3 conventions for positional specifiers. If there are any positional specifiers in *formatString* then all of the specifiers must be positional.

The second portion of a conversion specifier may contain any of the following flag characters, in any order:

- Specifies that the converted argument should be left-justified in its field (numbers are normally right-justified with leading spaces if needed).
- + Specifies that a number should always be printed with a sign, even if positive.

- space* Specifies that a space should be added to the beginning of the number if the first character isn't a sign.
- 0** Specifies that the number should be padded on the left with zeroes instead of spaces.
- #** Requests an alternate output form. For **o** and **O** conversions it guarantees that the first digit is always **0**. For **x** or **X** conversions, **0x** or **0X** (respectively) will be added to the beginning of the result unless it is zero. For all floating-point conversions (**e**, **E**, **f**, **g**, and **G**) it guarantees that the result always has a decimal point. For **g** and **G** conversions it specifies that trailing zeroes should not be removed.

The third portion of a conversion specifier is a number giving a minimum field width for this conversion. It is typically used to make columns line up in tabular printouts. If the converted argument contains fewer characters than the minimum field width then it will be padded so that it is as wide as the minimum field width. Padding normally occurs by adding extra spaces on the left of the converted argument, but the **0** and **-** flags may be used to specify padding with zeroes on the left or with spaces on the right, respectively. If the minimum field width is specified as **\*** rather than a number, then the next argument to the **format** command determines the minimum field width; it must be a numeric string.

The fourth portion of a conversion specifier is a precision, which consists of a period followed by a number. The number is used in different ways for different conversions. For **e**, **E**, and **f** conversions it specifies the number of digits to appear to the right of the decimal point. For **g** and **G** conversions it specifies the total number of digits to appear, including those on both sides of the decimal point (however, trailing zeroes after the decimal point will still be omitted unless the **#** flag has been specified). For integer conversions, it specifies a minimum number of digits to print (leading zeroes will be added if necessary). For **s** conversions it specifies the maximum number of characters to be printed; if the string is longer than this then the trailing characters will be dropped. If the precision is specified with **\*** rather than a number then the next argument to the **format** command determines the precision; it must be a numeric string.

The fourth part of a conversion specifier is a length modifier, which must be **h** or **l**. If it is **h** it specifies that the numeric value should be truncated to a 16-bit value before converting. This option is rarely useful. The **l** modifier is ignored.

The last thing in a conversion specifier is an alphabetic character that determines what kind of conversion to perform. The following conversion characters are currently supported:

- d** Convert integer to signed decimal string.
- u** Convert integer to unsigned decimal string.

- i** Convert integer to signed decimal string; the integer may either be in decimal, in octal (with a leading **0**) or in hexadecimal (with a leading **0x**).
- o** Convert integer to unsigned octal string.
- x** or **X** Convert integer to unsigned hexadecimal string, using digits “0123456789abcdef” for **x** and “0123456789ABCDEF” for **X**.
- c** Convert integer to the 8-bit character it represents.
- s** No conversion; just insert string.
- f** Convert floating-point number to signed decimal string of the form *xx.yyy*, where the number of *y*’s is determined by the precision (default: 6). If the precision is 0 then no decimal point is output.
- e** or **e** Convert floating-point number to scientific notation in the form *x.yyye±zz*, where the number of *y*’s is determined by the precision (default: 6). If the precision is 0 then no decimal point is output. If the **E** form is used then **E** is printed instead of **e**.
- g** or **G** If the exponent is less than  $-4$  or greater than or equal to the precision, then convert floating-point number as for **%e** or **%E**. Otherwise convert as for **%f**. Trailing zeroes and a trailing decimal point are omitted.
- %** No conversion: just insert **%**.

For the numerical conversions the argument being converted must be an integer or floating-point string; format converts the argument to binary and then converts it back to a string according to the conversion specifier.

### Differences From Ansi Sprintf

The behavior of the format command is the same as the ANSI C **sprintf** procedure except for the following differences:

- [1] **%p** and **%n** specifiers are not currently supported.
- [2] For **%c** conversions the argument must be a decimal string, which will then be converted to the corresponding character value.
- [3] The **I** modifier is ignored; integer values are always converted as if there were no modifier present and real values are always converted as if the **I** modifier were present (i.e. type **double** is used for the internal representation). If the **h** modifier is specified then integer values are truncated to **short** before conversion.

## A.21 gets

### Syntax

```
gets fileId ?varName?
```

### Description

The **gets** command reads the next line from the file given by *fileId* and discards the terminating newline character. If *varName* is specified then the line is placed in the variable by that name and the return value is a count of the number of characters read (not including the newline). If the end of the file is reached before reading any characters then -1 is returned and *varName* is set to an empty string. If *varName* is not specified then the return value will be the line (minus the newline character) or an empty string if the end of the file is reached before reading any characters. An empty string will also be returned if a line contains no characters except the newline, so **eof** may have to be used to determine what really happened. If the last character in the file is not a newline character then **gets** behaves as if there were an additional newline character at the end of the file. *fileid* must be **stdin** or the return value from a previous call to **open**; it must refer to a file that was opened for reading.

Any existing end-of-file or error condition on the file is cleared at the beginning of the **gets** command.

## A.22 glob

### Syntax

```
glob ?switches? pattern ?pattern ...?
```

### Description

The command performs file name “globbing” in a fashion similar to the csh shell. It returns a list of the files whose names match any of the *pattern* arguments.

If the initial arguments to **glob** start with – then they are treated as switches. The following switches are currently supported:

- nocomplain** Allows an empty list to be returned without error; without this switch an error is returned if the result list would be empty.
- – Marks the end of switches. The argument following this one will be treated as a *pattern* even if it starts with a –.

The *pattern* arguments may contain any of the following special characters:

- ? Matches any single character.
- \* Matches any sequence of zero or more characters.
- [*chars*] Matches any single character in *chars*. If *chars* contains a sequence of the form *a–b* then any character between *a* and *b* (inclusive) will match.
- \*x* Matches the character *x*.
- {*a,b,...*} Matches any of the strings *a*, *b*, etc.

As with csh, a “.” at the beginning of a file’s name or just after a “/” must be matched explicitly or with a {} construct. In addition, all “/” characters must be matched explicitly.

If the first character in a *pattern* is “~” then it refers to the home directory for the user whose name follows the “~”. If the “~” is followed immediately by “/” then the value of the HOME environment variable is used.

The **glob** command differs from csh globbing in two ways. First, it does not sort its result list (use the **lsort** command if you want the list sorted).

Second, **glob** only returns the names of files that actually exist; in csh no check for existence is made unless a pattern contains a ?, \*, or [] construct.



## A.23 global

### Syntax

```
global varname ?varname ...?
```

### Description

The command is ignored unless a Tcl procedure is being interpreted. If so then it declares the given *varname*'s to be global variables rather than local ones. For the duration of the current procedure (and only while executing in the current procedure), any reference to any of the *varnames* will refer to the global variable by the same name.

## A.24 history

### Syntax

```
history ?option? ?arg arg ...?
```

### Description

The **history** command performs one of several operations related to recently-executed commands recorded in a history list. Each of these recorded commands is referred to as an “event”. When specifying an event to the **history** command, the following forms may be used:

- [1] A number: if positive, it refers to the event with that number (all events are numbered starting at 1). If the number is negative, it selects an event relative to the current event (**-1** refers to the previous event, **-2** to the one before that, and so on).
- [2] A string: selects the most recent event that matches the string. An event is considered to match the string either if the string is the same as the first characters of the event, or if the string matches the event in the sense of the **string match** command.

The **history** command can take any of the following forms:

#### **history**

Same as **history info**, described below.

#### **history add** *command* ?**exec**?

Adds the *command* argument to the history list as a new event. If **exec** is specified (or abbreviated) then the command is also executed and its result is returned. If **exec** isn’t specified then an empty string is returned as result.

#### **history change** *newValue* ?*event*?

Replaces the value recorded for an event with *newValue*. *Event* specifies the event to replace, and defaults to the *current* event (not event **-1**). This command is intended for use in commands that implement new forms of history substitution and wish to replace the current event (which invokes the substitution) with the command created through substitution. The return value is an empty string.

#### **history event** ?*event*?

Returns the value of the event given by *event*. *Event* defaults to **-1**. This command causes history revision to occur: see below for details.

**history info** *?count?*

Returns a formatted string (intended for humans to read) giving the event number and contents for each of the events in the history list except the current event. If *count* is specified then only the most recent *count* events are returned.

**history keep** *count*

This command may be used to change the size of the history list to *count* events. Initially, 20 events are retained in the history list. This command returns an empty string.

**history nextid**

Returns the number of the next event to be recorded in the history list. It is useful for things like printing the event number in command-line prompts.

**history redo** *?event?*

Re-executes the command indicated by *event* and return its result. *Event* defaults to **-1**. This command results in history revision: see below for details.

**history substitute** *old new ?event?*

Retrieves the command given by *event* (**-1** by default), replace any occurrences of *old* by *new* in the command (only simple character equality is supported; no wild cards), execute the resulting command, and return the result of that execution. This command results in history revision: see below for details.

**history words** *selector ?event?*

Retrieves from the command given by *event* (**-1** by default) the words given by *selector*, and return those words in a string separated by spaces. The **selector** argument has three forms. If it is a single number then it selects the word given by that number (**0** for the command name, **1** for its first argument, and so on). If it consists of two numbers separated by a dash, then it selects all the arguments between those two. Otherwise **selector** is treated as a pattern; all words matching that pattern (in the sense of **string match**) are returned. In the numeric forms **\$** may be used to select the last word of a command. For example, suppose the most recent command in the history list is

```
format {%s is %d years old} Alice  
[expr $ageInMonths/12]
```

Below are some history commands and the results they would produce:

```
history words $ [expr $ageInMonths/12]
history words 1-2 {%s is %d years old} Alice
history words *a*o* {%s is %d years old} \
    [expr $ageInMonths/12]
```

**History words** results in history revision: see below for details.

## History Revision

The history options **event**, **redo**, **substitute**, and **words** result in “history revision”. When one of these options is invoked then the current event is modified to eliminate the history command and replace it with the result of the history command. For example, suppose that the most recent command in the history list is

```
set a [expr $b+2]
```

and suppose that the next command invoked is one of the ones on the left side of the table below. The command actually recorded in the history event will be the corresponding one on the right side of the table.

```
history redo set a [expr $b+2]
history s a b set b [expr $b+2]
set c [history w 2] set c [expr $b+2]
```

History revision is needed because event specifiers like **-1** are only valid at a particular time: once more events have been added to the history list a different event specifier would be needed.

History revision occurs even when **history** is invoked indirectly from the current event (e.g. a user types a command that invokes a Tcl procedure that invokes **history**): the top-level command whose execution eventually resulted in a **history** command is replaced.

If you wish to invoke commands like **history words** without history revision, you can use **history event** to save the current history event and then use **history change** to restore it later.

## A.25 if

### Syntax

```
if expr1 ?then? body1 elseif expr2 ?then? body2 \  
    elseif ... ?else? ?bodyN?
```

### Description

The **if** command evaluates *expr1* as an expression (in the same way that **expr** evaluates its argument). The value of the expression must be a boolean (a numeric value, where 0 is false and anything is true, or a string value such as **true** or **yes** for true and **false** or **no** for false); if it is true then *body1* is executed by passing it to the Tcl interpreter. Otherwise *expr2* is evaluated as an expression and if it is true then **body2** is executed, and so on. If none of the expressions evaluates to true then *bodyN* is executed. The **then** and **else** arguments are optional “noise words” to make the command easier to read. There may be any number of **elseif** clauses, including zero. *BodyN* may also be omitted as long as **else** is omitted too. The return value from the command is the result of the body script that was executed, or an empty string if none of the expressions was non-zero and there was no *bodyN*.

## A.26 incr

### Syntax

```
incr varName ?increment?
```

### Description

Increments the value stored in the variable whose name is *varName*. The value of the variable must be an integer. If *increment* is supplied then its value (which must be an integer) is added to the value of variable *varName*; otherwise 1 is added to *varName*. The new value is stored as a decimal string in variable *varName* and also returned as result.

## A.27 info

### Syntax

```
info option ?arg arg ...?
```

### Description

The command provides information about various internals of the Tcl interpreter. The legal *option*'s (which may be abbreviated) are:

**info args** *procname*

Returns a list containing the names of the arguments to procedure *procname*, in order. *Procname* must be the name of a Tcl command procedure.

**info body** *procname*

Returns the body of procedure *procname*. *Procname* must be the name of a Tcl command procedure.

**info cmdcount**

Returns a count of the total number of commands that have been invoked in this interpreter.

**info commands** *?pattern?*

If *pattern* isn't specified, returns a list of names of all the Tcl commands, including both the built-in commands written in C and the command procedures defined using the **proc** command. If *pattern* is specified, only those names matching *pattern* are returned. Matching is determined using the same rules as for **string match**.

**info complete** *command*

Returns 1 if *command* is a complete Tcl command in the sense of having no unclosed quotes, braces, brackets or array element names. If the command doesn't appear to be complete then 0 is returned. This command is typically used in line-oriented input environments to allow users to type in commands that span multiple lines; if the command isn't complete, the script can delay evaluating it until additional lines have been typed to complete the command.

**info default** *procname arg varname*

*Procname* must be the name of a Tcl command procedure and *arg* must be the name of an argument to that procedure. If *arg* doesn't have a default value then the command returns 0. Otherwise it returns 1 and places the default value of *arg* into variable *varname*.

**info exists** *varName*

Returns **1** if the variable named *varName* exists in the current context (either as a global or local variable), returns **0** otherwise.

**info globals** *?pattern?*

If *pattern* isn't specified, returns a list of all the names of currently-defined global variables. If *pattern* is specified, only those names matching *pattern* are returned. Matching is determined using the same rules as for **string match**.

**info level** *?number?*

If *number* is not specified, this command returns a number giving the stack level of the invoking procedure, or 0 if the command is invoked at top-level. If *number* is specified, then the result is a list consisting of the name and arguments for the procedure call at level *number* on the stack. If *number* is positive then it selects a particular stack level (1 refers to the top-most active procedure, 2 to the procedure it called, and so on); otherwise it gives a level relative to the current level (0 refers to the current procedure, -1 to its caller, and so on). See the **uplevel** command for more information on what stack levels mean.

**info library**

Returns the name of the library directory in which standard Tcl scripts are stored. The default value for the library is compiled into Tcl, but it may be overridden by setting the `TCL_LIBRARY` environment variable. If there is no `TCL_LIBRARY` variable and no compiled-in value then an error is generated. See the **library** manual entry for details of the facilities provided by the Tcl script library. Normally each application will have its own application-specific script library in addition to the Tcl script library; I suggest that each application set a global variable with a name like `$app_library` (where *app* is the application's name) to hold the location of that application's library directory.

**info locals** *?pattern?*

If *pattern* isn't specified, returns a list of all the names of currently-defined local variables, including arguments to the current procedure, if any. Variables defined with the **global** and **upvar** commands will not be returned. If *pattern* is specified, only those names matching *pattern* are returned. Matching is determined using the same rules as for **string match**.

**info patchlevel**

Returns a decimal integer giving the current patch level for Tcl.



The patch level is incremented for each new release or patch, and it uniquely identifies an official version of Tcl.

**info procs** *?pattern?*

If *pattern* isn't specified, returns a list of all the names of Tcl command procedures. If *pattern* is specified, only those names matching *pattern* are returned. Matching is determined using the same rules as for **string match**.

**info script**

If a Tcl script file is currently being evaluated (i.e. there is a call to **Tcl\_EvalFile** active or there is an active invocation of the **source** command), then this command returns the name of the innermost file being processed. Otherwise the command returns an empty string.

**info tclversion**

Returns the version number for this version of Tcl in the form *x.y*, where changes to *x* represent major changes with probable incompatibilities and changes to *y* represent small enhancements and bug fixes that retain backward compatibility.

**info vars** *?pattern?*

If *pattern* isn't specified, returns a list of all the names of currently-visible variables, including both locals and currently-visible globals. If *pattern* is specified, only those names matching *pattern* are returned. Matching is determined using the same rules as for **string match**.

## A.28 join

### Syntax

```
join list ?joinString?
```

### Description

The *list* argument must be a valid Tcl list. This command returns the string formed by joining all of the elements of *list* together with *joinString* separating each adjacent pair of elements. The *joinString* argument defaults to a space character.

## A.29 lappend

### Syntax

```
lappend varName value ?value value ...?
```

### Description

The command treats the variable given by *varName* as a list and appends each of the *value* arguments to that list as a separate element, with spaces between elements. If *varName* doesn't exist, it is created as a list with elements given by the *value* arguments. **Lappend** is similar to **append** except that the *values* are appended as list elements rather than raw text. This command provides a relatively efficient way to build up large lists. For example, “**lappend a \$b**” is much more efficient than “**set a [concat \$a [list \$b]]**” when **\$a** is long.

## A.30 library

### Syntax

```
auto_execok cmd  
auto_load cmd  
auto_mkindex dir pattern pattern ...  
auto_reset  
parray arrayName  
unknown cmd ?arg arg ...?
```

### Description

Tcl includes a library of Tcl procedures for commonly-needed functions. The procedures defined in the Tcl library are generic ones suitable for use by many different applications. The location of the Tcl library is returned by the **info library** command. In addition to the Tcl library, each application will normally have its own library of support procedures as well; the location of this library is normally given by the value of the **\$app\_library** global variable, where *app* is the name of the application. For example, the location of the Tk library is kept in the variable **\$tk\_library**.

To access the procedures in the Tcl library, an application should source the file **init.tcl** in the library, for example with the Tcl command

```
source [info library]/init.tcl
```

This will define the unknown procedure and arrange for the other procedures to be loaded on-demand using the auto-load mechanism defined below.

### Command Procedures

The following procedures are provided in the Tcl library:

#### **auto\_execok** *cmd*

Determines whether there is an executable file by the name *cmd*. This command examines the directories in the current search path (given by the PATH environment variable) to see if there is an executable file named *cmd* in any of those directories. If so, it returns 1; if not it returns 0. **Auto\_exec** remembers information about previous searches in an array named **auto\_execs**; this avoids the path search in future calls for the same *cmd*. The command **auto\_reset** may be used to force **auto\_execok** to forget its cached information.

#### **auto\_load** *cmd*

This command attempts to load the definition for a Tcl command named *cmd*. To do this, it searches an *auto-load path*, which is a list of one or more directories. The auto-load path is given by the

global variable `$auto_path` if it exists. If there is no `$auto_path` variable, then the `TCLLIBPATH` environment variable is used, if it exists. Otherwise the auto-load path consists of just the Tcl library directory. Within each directory in the auto-load path there must be a file `tclIndex` that describes one or more commands defined in that directory and a script to evaluate to load each of the commands. The `tclIndex` file should be generated with the `auto_mkindex` command. If `cmd` is found in an index file, then the appropriate script is evaluated to create the command.

The `auto_load` command returns 1 if `cmd` was successfully created. The command returns 0 if there was no index entry for `cmd` or if the script didn't actually define `cmd` (e.g. because index information is out of date). If an error occurs while processing the script, then that error is returned. `Auto_load` only reads the index information once and saves it in the array `auto_index`; future calls to `auto_load` check for `cmd` in the array rather than re-reading the index files. The cached index information may be deleted with the command `auto_reset`. This will force the next `auto_load` command to reload the index database from disk.

**auto\_mkindex** *dir pattern pattern ...*

Generates an index suitable for use by `auto_load`. The command searches *dir* for all files whose names match any of the *pattern* arguments (matching is done with the `glob` command), generates an index of all the Tcl command procedures defined in all the matching files, and stores the index information in a file named `tclIndex` in *dir*. For example, the command

```
auto_mkindex foo *.tcl
```

will read all the `.tcl` files in subdirectory `foo` and generate a new index file `foo/tclIndex`.

`Auto_mkindex` parses the Tcl scripts in a relatively unsophisticated way: if any line contains the word `proc` as its first characters then it is assumed to be a procedure definition and the next word of the line is taken as the procedure's name. Procedure definitions that don't appear in this way (e.g. they have spaces before the `proc`) will not be indexed.

**auto\_reset**

Destroys all the information cached by `auto_execok` and `auto_load`. This information will be re-read from disk the next time it is needed. `Auto_reset` also deletes any procedures listed in the auto-load index, so that fresh copies of them will be loaded the next time that they're used.

**parray** *arrayName*

Prints on standard output the names and values of all the elements in the array *arrayName*. **ArrayName** must be an array accessible to the caller of **parray**. It may be either local or global.

**unknown** *cmd* ?*arg arg ...?*

This procedure is invoked automatically by the Tcl interpreter whenever the name of a command doesn't exist. The **unknown** procedure receives as its arguments the name and arguments of the missing command.

**Unknown** first calls **auto\_load** to load the command. If this succeeds, then it executes the original command with its original arguments. If the auto-load fails then **unknown** calls **auto\_execok** to see if there is an executable file by the name *cmd*. If so, it invokes the Tcl **exec** command with *cmd* and all the *args* as arguments. If *cmd* can't be auto-executed, **unknown** checks to see if the command was invoked at top-level and outside of any script. If so, then **unknown** takes two additional steps. First, it sees if *cmd* has one of the following three forms: **!!**, **!event**, or **^old^new?^?**. If so, then **unknown** carries out history substitution in the same way that **cs** would for these constructs. Second, and last, **unknown** checks to see if *cmd* is a unique abbreviation for an existing Tcl command. If so, it expands the command name and executes the command with the original arguments. If none of the above efforts has been able to execute the command, **unknown** generates an error return. If the global variable **auto\_noload** is defined, then the auto-load step is skipped. If the global variable **auto\_noexec** is defined then the auto-exec step is skipped. Under normal circumstances the return value from **unknown** is the return value from the command that was eventually executed.

## Variables

The following global variables are defined or used by the procedures in the Tcl library:

**auto\_execs**

Used by **auto\_execok** to record information about whether particular commands exist as executable files.

**auto\_index**

Used by **auto\_load** to save the index information read from disk.

**auto\_noexec**

If set to any value, then **unknown** will not attempt to auto-exec any commands.

**auto\_noload**

If set to any value, then **unknown** will not attempt to auto-load any commands.

**auto\_path**

If set, then it must contain a valid Tcl list giving directories to search during auto-load operations.

**env(TCL\_LIBRARY)**

If set, then it specifies the location of the directory containing library scripts (the value of this variable will be returned by the command **info library**). If this variable isn't set then a default value is used.

**env(TCLLIBPATH)**

If set, then it must contain a valid Tcl list giving directories to search during auto-load operations. This variable is only used if **auto\_path** is not defined.

**unknown\_active**

This variable is set by **unknown** to indicate that it is active. It is used to detect errors where **unknown** recurses on itself infinitely. The variable is unset before **unknown** returns.

## A.31 `lindex`

### Syntax

```
lindex list index
```

### Description

This command treats *list* as a Tcl list and returns the *index*'th element from it (0 refers to the first element of the list). In extracting the element, *lindex* observes the same rules concerning braces and quotes and backslashes as the Tcl command interpreter; however, variable substitution and command substitution do not occur. If *index* is negative or greater than or equal to the number of elements in *value*, then an empty string is returned.



## A.32 **linsert**

### **Syntax**

```
linsert list index element ?element element ...?
```

### **Description**

The **linsert** command produces a new list from *list* by inserting all of the *element* arguments just before the *index*th element of *list*. Each *element* argument will become a separate element of the new list. If *index* is less than or equal to zero, then the new elements are inserted at the beginning of the list. If *index* is greater than or equal to the number of elements in the list, then the new elements are appended to the list.

## A.33 list

### Syntax

```
list ?arg arg ...?
```

### Description

The command returns a list comprised of all the *args*, or an empty string if no *args* are specified.

Braces and backslashes get added as necessary, so that the **index** command may be used on the result to re-extract the original arguments, and also so that **eval** may be used to execute the resulting list, with *arg1* comprising the command's name and the other *args* comprising its arguments. **List** produces slightly different results than **concat**: **concat** removes one level of grouping before forming the list, while **list** works directly from the original arguments. For example, the command

```
list a b {c d e} {f {g h}}
```

will return

```
a b {c d e} {f {g h}}
```

while **concat** with the same arguments will return

```
a b c d e f {g h}
```

## A.34 llength

### Syntax

```
llength list
```

### Description

The **llength** command treats *list* as a list and returns a decimal string giving the number of elements in it.

## A.35 lrange

### Syntax

```
lrange list first last
```

### Description

*List* must be a valid Tcl list. This command will return a new list consisting of elements *first* through *last*, inclusive. *Last* may be **end** (or any abbreviation of it) to refer to the last element of the list. If *first* is less than zero, it is treated as if it were zero. If *last* is greater than or equal to the number of elements in the list, then it is treated as if it were **end**. If *first* is greater than *last* then an empty string is returned. Note: “**lrange** *list first first*” does not always produce the same result as “**lindex** *list first*” (although it often does for simple fields that aren’t enclosed in braces); it does, however, produce exactly the same results as “**list** [**lindex** *list first*]”

## A.36 lreplace

### Syntax

```
lreplace list first last ?element element ...?
```

### Description

**Lreplace** returns a new list formed by replacing one or more elements of *list* with the *element* arguments. *First* gives the index in *list* of the first element to be replaced. If *first* is less than zero then it refers to the first element of *list*; the element indicated by *first* must exist in the list. *Last* gives the index in *list* of the last element to be replaced; it must be greater than or equal to *first*. *Last* may be **end** (or any abbreviation of it) to indicate that all elements between *first* and the end of the list should be replaced. The *element* arguments specify zero or more new arguments to be added to the list in place of those that were deleted. Each *element* argument will become a separate element of the list. If no *element* arguments are specified, then the elements between *first* and *last* are simply deleted.

## A.37 lsearch

### Syntax

```
lsearch ?mode? list pattern
```

### Description

The command searches the elements of *list* to see if one of them matches *pattern*. If so, the command returns the index of the first matching element. If not, the command returns **-1**.

The *mode* argument indicates how the elements of the list are to be matched against *pattern* and it must have one of the following values:

- exact**     The list element must contain exactly the same string as *pattern*.
- glob**      *Pattern* is a glob-style pattern which is matched against each list element using the same rules as the **string match** command.
- regexp**    *Pattern* is treated as a regular expression and matched against each list element using the same rules as the **regexp** command.

If *mode* is omitted then it defaults to **-glob**.

## A.38 lsort

### Syntax

```
lsort ?switches? list
```

### Description

The command sorts the elements of *list*, returning a new list in sorted order. By default ASCII sorting is used with the result returned in increasing order. However, any of the following switches may be specified before *list* to control the sorting process (unique abbreviations are accepted):

- |                                |   |
|--------------------------------|---|
| <b>-ascii</b>                  | Use string comparison with ASCII collation order. This is the default.  |
| <b>-integer</b>                | Convert list elements to integers and use integer comparison.   |
| <b>-real</b>                   | Convert list elements to floating-point values and use floating comparison.   |
| <b>-command</b> <i>command</i> | Use <i>command</i> as a comparison command. To compare two elements, evaluate a Tcl script consisting of <i>command</i> with the two elements appended as additional arguments. The script should return an integer less than, equal to, or greater than zero if the first element is to be considered less than, equal to, or greater than the second, respectively. |
| <b>-increasing</b>             | Sort the list in increasing order (“smallest” items first). This is the default.  |
| <b>-decreasing</b>             | Sort the list in decreasing order (“largest” items first).  |

## A.39 open

### Syntax

```
open fileName ?access? ?permissions?
```

### Description

The command opens a file and returns an identifier, *fileId*, that may be used in future invocations of commands like **read**, **puts**, and **close**. *filename* gives the name of the file to open; if it starts with a tilde then tilde substitution is performed as described for **Tcl\_TildeSubst**. If the first character of *fileName* is “|” then the remaining characters of *fileName* are treated as a command pipeline to invoke, in the same style as for **exec**. In this case, the identifier returned by **open** may be used to write to the command’s input pipe or read from its output pipe.

The *access* argument indicates the way in which the file (or command pipeline) is to be accessed.

It may take two forms, either a string in the form that would be passed to the **fopen** library procedure or a list of POSIX access flags. It defaults to “r”. In the first form *access* may have any of the following values:

- r** Open the file for reading only; the file must already exist.
- r+** Open the file for both reading and writing; the file must already exist.
- w** Open the file for writing only. Truncate it if it exists. If it doesn’t exist, create a new file.
- w+** Open the file for reading and writing. Truncate it if it exists. If it doesn’t exist, create a new file.
- a** Open the file for writing only. The file must already exist, and the file is positioned so that new data is appended to the file.
- a+** Open the file for reading and writing. If the file doesn’t exist, create a new empty file. Set the initial access position to the end of the file.

In the second form, *access* consists of a list of any of the following flags, all of which have the standard POSIX meanings. One of the flags must be either **RONLY**, **WRONLY** or **RDWR**.

- RONLY** Open the file for reading only.
- WRONLY** Open the file for writing only.
- RDWR** Open the file for both reading and writing.
- APPEND** Set the file pointer to the end of the file prior to each write.
- CREAT** Create the file if it doesn’t already exist (without this flag it is an error for the file not to exist).



- EXCL** If **CREAT** is specified also, an error is returned if the file already exists.
- NOCTTY** If the file is a terminal device, this flag prevents the file from becoming the controlling terminal of the process.
- NONBLOCK** Prevents the process from blocking while opening the file. For details refer to your system documentation on the **open** system call's **O\_NONBLOCK** flag.
- TRUNC** If the file exists it is truncated to zero length.

If a new file is created as part of opening it, *permissions* (an integer) is used to set the permissions for the new file in conjunction with the process's file mode creation mask. *Permissions* defaults to 0666.

If a file is opened for both reading and writing then **seek** must be invoked between a read and a write, or vice versa (this restriction does not apply to command pipelines opened with **open**). When *fileName* specifies a command pipeline and a write-only access is used, then standard output from the pipeline is directed to the current standard output unless overridden by the command. When *fileName* specifies a command pipeline and a read-only access is used, then standard input from the pipeline is taken from the current standard input unless overridden by the command.

## A.40 pid

### Syntax

```
pid ?fileId?
```

### Description

If the *fileId* argument is given then it should normally refer to a process pipeline created with the **open** command. In this case the **pid** command will return a list whose elements are the process identifiers of all the processes in the pipeline, in order. The list will be empty if *fileId* refers to an open file that isn't a process pipeline. If no *fileId* argument is given then **pid** returns the process identifier of the current process. All process identifiers are returned as decimal strings.

## A.41 `proc`

### Syntax

```
proc name args body
```

### Description

The **proc** command creates a new Tcl procedure named *name*, replacing any existing command or procedure there may have been by that name. Whenever the new command is invoked, the contents of *body* will be executed by the Tcl interpreter. *Args* specifies the formal arguments to the procedure. It consists of a list, possibly empty, each of whose elements specifies one argument. Each argument specifier is also a list with either one or two fields. If there is only a single field in the specifier then it is the name of the argument; if there are two fields, then the first is the argument name and the second is its default value.

When *name* is invoked a local variable will be created for each of the formal arguments to the procedure; its value will be the value of corresponding argument in the invoking command or the argument's default value. Arguments with default values need not be specified in a procedure invocation. However, there must be enough actual arguments for all the formal arguments that don't have defaults, and there must not be any extra actual arguments. There is one special case to permit procedures with variable numbers of arguments. If the last formal argument has the name **args**, then a call to the procedure may contain more actual arguments than the procedure has formals. In this case, all of the actual arguments starting at the one that would be assigned to **args** are combined into a list (as if the **list** command had been used); this combined value is assigned to the local variable **args**.

When *body* is being executed, variable names normally refer to local variables, which are created automatically when referenced and deleted when the procedure returns. One local variable is automatically created for each of the procedure's arguments. Global variables can only be accessed by invoking the **global** command or the **upvar** command.

The **proc** command returns an empty string. When a procedure is invoked, the procedure's return value is the value specified in a **return** command. If the procedure doesn't execute an explicit **return**, then its return value is the value of the last command executed in the procedure's body. If an error occurs while executing the procedure body, then the procedure-as-a-whole will return that same error.

## A.42 puts

### Syntax

```
puts ?-nonewline? ?fileId? string
```

### Description

Writes the characters given by *string* to the file given by *fileId*. *fileId* must have been the return value from a previous call to **open**, or it may be **stdout** or **stderr** to refer to one of the standard I/O channels; it must refer to a file that was opened for writing. If no *fileId* is specified then it defaults to **stdout**. **Puts** normally outputs a newline character after *string*, but this feature may be suppressed by specifying the **-nonewline** switch. Output to files is buffered internally by Tcl; the **flush** command may be used to force buffered characters to be output.

## A.43 pwd

### Syntax

pwd

### Description

Returns the path name of the current working directory.

## A.44 read

### Syntax

```
read ?-nonewline? fileId  
read fileId numBytes
```

### Description

In the first form, all of the remaining bytes are read from the file given by *fileId*; they are returned as the result of the command. If the **-nonewline** switch is specified then the last character of the file is discarded if it is a newline. In the second form, the extra argument specifies how many bytes to read; exactly this many bytes will be read and returned, unless there are fewer than *numBytes* bytes left in the file; in this case, all the remaining bytes are returned. *fileid* must be **stdin** or the return value from a previous call to **open**; it must refer to a file that was opened for reading. Any existing end-of-file or error condition on the file is cleared at the beginning of the **read** command.

## A.45 regexp

### Syntax

```
regexp ?switches? exp string ?matchVar? \  
      ?subMatchVar subMatchVar ...?
```

### Description

**regexp** determines whether the regular expression *exp* matches part or all of *string* and returns 1 if it does, 0 if it doesn't.

If additional arguments are specified after *string* then they are treated as the names of variables in which to return information about which part(s) of *string* matched *exp*. *MatchVar* will be set to the range of *string* that matched all of *exp*. The first *subMatchVar* will contain the characters in *string* that matched the leftmost parenthesized subexpression within *exp*, the next *subMatchVar* will contain the characters that matched the next parenthesized subexpression to the right in *exp*, and so on.

If the initial arguments to **regexp** start with – then they are treated as switches. The following switches are currently supported:

- nocase** Causes upper-case characters in *string* to be treated as lower case during the matching process.
- indices** Changes what is stored in the *subMatchVars*. Instead of storing the matching characters from **string**, each variable will contain a list of two decimal strings giving the indices in *string* of the first and last characters in the matching range of characters.
- – Marks the end of switches. The argument following this one will be treated as *exp* even if it starts with a –.

If there are more *subMatchVar*'s than parenthesized subexpressions within *exp*, or if a particular subexpression in *exp* doesn't match the string (e.g. because it was in a portion of the expression that wasn't matched), then the corresponding *subMatchVar* will be set to “–1 –1” if –**indices** has been specified or to an empty string otherwise.

### Regular Expressions

Regular expressions are implemented using Henry Spencer's package, and much of the description of regular expressions below is copied verbatim from his manual entry.

A regular expression is zero or more *branches*, separated by '|'. It matches anything that matches one of the branches.

A branch is zero or more *pieces*, concatenated. It matches a match for the first, followed by a match for the second, etc.

A piece is an *atom* possibly followed by “\*”, “+”, or “?”. An atom followed by “\*” matches a sequence of 0 or more matches of the atom. An atom followed by “+” matches a sequence of 1 or more matches of the atom. An atom followed by “?” matches a match of the atom, or the null string.

An atom is a regular expression in parentheses (matching a match for the regular expression), a *range* (see below), “.” (matching any single character), “^” (matching the null string at the beginning of the input string), “\$” (matching the null string at the end of the input string), a “\” followed by a single character (matching that character), or a single character with no other significance (matching that character).

A *range* is a sequence of characters enclosed in “[ ]”. It normally matches any single character from the sequence. If the sequence begins with “^”, it matches any single character *not* from the rest of the sequence. If two characters in the sequence are separated by “-”, this is shorthand for the full list of ASCII characters between them (e.g. “[0-9]” matches any decimal digit). To include a literal “]” in the sequence, make it the first character (following a possible “^”). To include a literal “-”, make it the first or last character.

### Choosing Among Alternative Matches

In general there may be more than one way to match a regular expression to an input string. For example, consider the command

```
regexp (a*)b* aabaaabb x y
```

Considering only the rules given so far, **x** and **y** could end up with the values **aabb** and **aa**, **aaab** and **aa**, **aaa**, **ab** and **a**, or any of several other combinations. To resolve this potential ambiguity **regexp** chooses among alternatives using the rule “first then longest”. In other words, it considers the possible matches in order working from left to right across the input string and the pattern, and it attempts to match longer pieces of the input string before shorter ones. More specifically, the following rules apply in decreasing order of priority:

- [1] If a regular expression could match two different parts of an input string then it will match the one that begins earliest.
- [2] If a regular expression contains | operators then the leftmost matching sub-expression is chosen.
- [3] In \*, +, and ? constructs, longer matches are chosen in preference to shorter ones.
- [4] In sequences of expression components the components are considered from left to right.

In the example from above, **(a\*)b\*** matches **aab**: the **(a\*)** portion of the pattern is matched first and it consumes the leading **aa**; then the **b\*** portion of the pattern consumes the next **b**. Or, consider the following example:



```
regexp (ab|a)(b*)c abc x y z
```

After this command **x** will be **abc**, **y** will be **ab**, and **z** will be an empty string. Rule 4 specifies that **(ab|a)** gets first shot at the input string and Rule 2 specifies that the **ab** sub-expression is checked before the **a** sub-expression. Thus the **b** has already been claimed before the **(b\*)** component is checked and **(b\*)** must match an empty string.

## A.46 regsub

### Syntax

```
regsub ?switches? exp string subSpec varName
```

### Description

The **regsub** command perform substitutions based on regular expression pattern matching. **regsub** matches the regular expression *exp* against *string*, and it copies *string* to the variable whose name is given by *varName*. The command returns 1 if there is a match and 0 if there isn't. If there is a match, then while copying *string* to *varName* the portion of *string* that matched *exp* is replaced with *subSpec*. If *subSpec* contains a "&" or "\0", then it is replaced in the substitution with the portion of *string* that matched *exp*. If *subSpec* contains a "\n", where *n* is a digit between 1 and 9, then it is replaced in the substitution with the portion of *string* that matched the *n*-th parenthesized subexpression of *exp*. Additional backslashes may be used in *subSpec* to prevent special interpretation of "&" or "\0" or "\n" or backslash. The use of backslashes in *subSpec* tends to interact badly with the Tcl parser's use of backslashes, so it's generally safest to enclose *subSpec* in braces if it includes backslashes.

If the initial arguments to **regexp** start with **-** then they are treated as switches. The following switches are currently supported:

- all** All ranges in *string* that match *exp* are found and substitution is performed for each of these ranges. Without this switch only the first matching range is found and substituted. If **-all** is specified, then "&" and "\n" sequences are handled for each substitution using the information from the corresponding match.
- nocase** Upper-case characters in *string* will be converted to lower-case before matching against *exp*; however, substitutions specified by *subSpec* use the original unconverted form of *string*.
- Marks the end of switches. The argument following this one will be treated as *exp* even if it starts with a **-**.

See the manual entry for **regexp** for details on the interpretation of regular expressions.

## A.47 rename

### Syntax

**rename** *oldName newName*

### Description

The **rename** command renames or deletes a command. **rename** renames the command that used to be called *oldName* so that it is now called *newName*. If *newName* is an empty string then *oldName* is deleted. **rename** returns an empty string as result.

## A.48 return

### Syntax

```
return ?-code code? ?-errorinfo info? \  
    ?-errorcode code? ?string?
```

### Description

The **return** command returns from a procedure. **return** returns immediately from the current procedure (or top-level command or **source** command), with *string* as the return value. If *string* is not specified then an empty string will be returned as result.

### Exceptional Returns

In the usual case where the **-code** option isn't specified the procedure will return normally (its completion code will be `TCL_OK`). However, the **-code** option may be used to generate an exceptional return from the procedure. *code* may have any of the following values:

<b>ok</b>	Normal return: same as if the option is omitted.
<b>error</b>	Error return: same as if the <b>error</b> command were used to terminate the procedure, except for handling of <b>errorInfo</b> and <b>errorCode</b> variables (see below).
<b>return</b>	The current procedure will return with a completion code of <code>TCL_RETURN</code> , so that the procedure that invoked it will return also.
<b>break</b>	The current procedure will return with a completion code of <code>TCL_BREAK</code> , which will terminate the innermost nested loop in the code that invoked the current procedure.
<b>continue</b>	The current procedure will return with a completion code of <code>TCL_CONTINUE</code> , which will terminate the current iteration of the innermost nested loop in the code that invoked the current procedure.
<b>value</b>	<i>Value</i> must be an integer; it will be returned as the completion code for the current procedure.

The **-code** option is rarely used. It is provided so that procedures that implement new control structures can reflect exceptional conditions back to their callers.

Two additional options, **-errorinfo** and **-errorcode**, may be used to provide additional information during error returns. These options are ignored unless *code* is **error**.

The **-errorinfo** option specifies an initial stack trace for the **errorInfo** variable; if it is not specified then the stack trace left in **errorInfo** will include the call to the

procedure and higher levels on the stack but it will not include any information about the context of the error within the procedure. Typically the *info* value is supplied from the value left in **errorInfo** after a **catch** command trapped an error within the procedure.

If the **-errorcode** option is specified then *code* provides a value for the **errorCode** variable. If the option is not specified then **errorCode** will default to **NONE**.

## A.49 scan

### Syntax

```
scan string format varName ?varName ...?
```

### Introduction

The **scan** command parses fields from an input string in the same fashion as the ANSI C **sscanf** procedure and returns a count of the number of fields successfully parsed. *string* gives the input to be parsed and *format* indicates how to parse it, using % conversion specifiers as in **sscanf**. Each *varName* gives the name of a variable; when a field is scanned from *string* the result is converted back into a string and assigned to the corresponding variable.

### Details On Scanning

**scan** operates by scanning *string* and *formatString* together. If the next character in *formatString* is a blank or tab then it is ignored. Otherwise, if it isn't a % character then it must match the next non-white-space character of *string*. When a % is encountered in *formatString*, it indicates the start of a conversion specifier. A conversion specifier contains three fields after the %: a \*, which indicates that the converted value is to be discarded instead of assigned to a variable; a number indicating a maximum field width; and a conversion character. All of these fields are optional except for the conversion character.

When **scan** finds a conversion specifier in *formatString*, it first skips any white-space characters in *string*. Then it converts the next input characters according to the conversion specifier and stores the result in the variable given by the next argument to **scan**. The following conversion characters are supported:

- d** The input field must be a decimal integer. It is read in and the value is stored in the variable as a decimal string.
- o** The input field must be an octal integer. It is read in and the value is stored in the variable as a decimal string.
- x** The input field must be a hexadecimal integer. It is read in and the value is stored in the variable as a decimal string.
- c** A single character is read in and its binary value is stored in the variable as a decimal string. Initial white space is not skipped in this case, so the input field may be a white-space character. This conversion is different from the ANSI standard in that the input field always consists of a single character and no field width may be specified.
- s** The input field consists of all the characters up to the next white-space character; the characters are copied to the variable.

- e or f or g** The input field must be a floating-point number consisting of an optional sign, a string of decimal digits possibly containing a decimal point, and an optional exponent consisting of an **e** or **E** followed by an optional sign and a string of decimal digits. It is read in and stored in the variable as a floating-point string.
- [chars]** The input field consists of any number of characters in *chars*. The matching string is stored in the variable. If the first character between the brackets is a **]** then it is treated as part of *chars* rather than the closing bracket for the set.
- [^chars]** The input field consists of any number of characters not in *chars*. The matching string is stored in the variable. If the character immediately following the **^** is a **]** then it is treated as part of the set rather than the closing bracket for the set.

The number of characters read from the input for a conversion is the largest number that makes sense for that particular conversion (e.g. as many decimal digits as possible for **%d**, as many octal digits as possible for **%o**, and so on). The input field for a given conversion terminates either when a white-space character is encountered or when the maximum field width has been reached, whichever comes first. If a **\*** is present in the conversion specifier then no variable is assigned and the next scan argument is not consumed.

### Differences From Ansi Sscanf

The behavior of the **scan** command is the same as the behavior of the ANSI C **sscanf** procedure except for the following differences:

- [1] **%p** and **%n** conversion specifiers are not currently supported.
- [2] For **%c** conversions a single character value is converted to a decimal string, which is then assigned to the corresponding *varName*; no field width may be specified for this conversion.
- [3] The **l**, **h**, and **L** modifiers are ignored; integer values are always converted as if there were no modifier present and real values are always converted as if the **l** modifier were present (i.e. type **double** is used for the internal representation).

## A.50 seek

### Syntax

```
seek fileId offset ?origin?
```

### Description

Change the current access position for *fileId*. *fileid* must have been the return value from a previous call to **open**, or it may be **stdin**, **stdout**, or **stderr** to refer to one of the standard I/O channels. The *offset* and *origin* arguments specify the position at which the next read or write will occur for *fileId*. *offset* must be an integer (which may be negative) and *origin* must be one of the following:

- |                |  |
|----------------|--|
| <b>start</b>   | The new access position will be <i>offset</i> bytes from the start of the file.  |
| <b>current</b> | The new access position will be <i>offset</i> bytes from the current access position; a negative <i>offset</i> moves the access position backwards in the file.  |
| <b>end</b>     | The new access position will be <i>offset</i> bytes from the end of the file. A negative <i>offset</i> places the access position before the end-of-file, and a positive <i>offset</i> places the access position after the end-of-file. |

The *origin* argument defaults to **start**. This command returns an empty string.



## A.51 set

### Syntax

```
set varName ?value?
```

### Description

The **set** command reads and writes variables. **set** returns the value of variable *varName*. If *value* is specified, then set the value of *varName* to *value*, creating a new variable if one doesn't already exist, and return its value. If *varName* contains an open parenthesis and ends with a close parenthesis, then it refers to an array element: the characters before the first open parenthesis are the name of the array, and the characters between the parentheses are the index within the array. Otherwise *varName* refers to a scalar variable. If no procedure is active, then *varName* refers to a global variable. If a procedure is active, then *varName* refers to a parameter or local variable of the procedure unless the **global** command has been invoked to declare *varName* to be global.

## A.52 source

### Syntax

```
source fileName
```

### Description

The **source** command evaluate a file as a Tcl script. **source** reads the file *fileName* and pass the contents to the Tcl interpreter as a script to evaluate in the normal fashion.

The return value from **source** is the return value of the last command executed from the file. If an error occurs in evaluating the contents of the file then **source** will return that error. If a **return** command is invoked from within the file then the remainder of the file will be skipped and the **source** command will return normally with the result from the **return** command. If *fileName* starts with a tilde, then it is tilde-substituted as described in the **Tcl\_TildeSubst** manual entry.

## A.53 split

### Syntax

```
split string ?splitChars?
```

### Description

The **split** command splits a string into a proper Tcl list. **split** returns a list created by splitting *string* at each character that is in the *splitChars* argument. Each element of the result list will consist of the characters from *string* that lie between instances of the characters in *splitChars*. Empty list elements will be generated if *string* contains adjacent characters in *splitChars*, or if the first or last character of *string* is in *splitChars*. If *splitChars* is an empty string then each character of *string* becomes a separate element of the result list. *splitchars* defaults to the standard white-space characters. For example,

```
split "comp.unix.misc" .
```

returns

```
"comp unix misc"
```

and

```
split "Hello world" {}
```

returns

```
H e l l o { } w o r l d
```

## A.54 string

### Syntax

```
string option arg ?arg ...?
```

### Description

Performs one of several string operations, depending on *option*. The legal *options* (which may be abbreviated) are:

**string compare *string1 string2***

Perform a character-by-character comparison of strings *string1* and *string2* in the same way as the C **strcmp** procedure. Return -1, 0, or 1, depending on whether *string1* is lexicographically less than, equal to, or greater than *string2*.

**string first *string1 string2***

Search *string2* for a sequence of characters that exactly match the characters in *string1*. If found, return the index of the first character in the first such match within *string2*. If not found, return -1.

**string index *string charIndex***

Returns the *charIndex*'th character of the *string* argument. A *charIndex* of 0 corresponds to the first character of the string. If *charIndex* is less than 0 or greater than or equal to the length of the string then an empty string is returned.

**string last *string1 string2***

Search *string2* for a sequence of characters that exactly match the characters in *string1*. If found, return the index of the first character in the last such match within *string2*. If there is no match, then return -1.

**string length *string***

Returns a decimal string giving the number of characters in *string*.

**string match *pattern string***

See if *pattern* matches *string*; return 1 if it does, 0 if it doesn't. Matching is done in a fashion similar to that used by the C-shell. For the two strings to match, their contents must be identical except that the following special sequences may appear in *pattern*:

- \* Matches any sequence of characters in *string*, including a null string.
- ? Matches any single character in *string*.

- [*chars*] Matches any character in the set given by *chars*. If a sequence of the form *x-y* appears in *chars*, then any character between *x* and *y*, inclusive, will match.
- \x Matches the single character *x*. This provides a way of avoiding the special interpretation of the characters *\*?[\]* in *pattern*.

**string range *string first last***

Returns a range of consecutive characters from *string*, starting with the character whose index is *first* and ending with the character whose index is *last*. An index of 0 refers to the first character of the string. *last* may be **end** (or any abbreviation of it) to refer to the last character of the string. If *first* is less than zero then it is treated as if it were zero, and if *last* is greater than or equal to the length of the string then it is treated as if it were **end**. If *first* is greater than *last* then an empty string is returned.

**string tolower *string***

Returns a value equal to *string* except that all upper case letters have been converted to lower case.

**string toupper *string***

Returns a value equal to *string* except that all lower case letters have been converted to upper case.

**string trim *string ?chars?***

Returns a value equal to *string* except that any leading or trailing characters from the set given by *chars* are removed. If *chars* is not specified then white space is removed (spaces, tabs, newlines, and carriage returns).

**string trimleft *string ?chars?***

Returns a value equal to *string* except that any leading characters from the set given by *chars* are removed. If *chars* is not specified then white space is removed (spaces, tabs, newlines, and carriage returns).

**string trimright *string ?chars?***

Returns a value equal to *string* except that any trailing characters from the set given by *chars* are removed. If *chars* is not specified then white space is removed (spaces, tabs, newlines, and carriage returns).

## A.55 switch

### Syntax

```
switch ?options? string pattern body ?pattern body ...?  
switch ?options? string {pattern body ?pattern body ...?}
```

### Description

The **switch** command matches its *string* argument against each of the *pattern* arguments in order. As soon as it finds a *pattern* that matches *string* it evaluates the following *body* argument by passing it recursively to the Tcl interpreter and returns the result of that evaluation. If the last *pattern* argument is **default** then it matches anything. If no *pattern* argument matches *string* and no default is given, then **switch** returns an empty string.

If the initial arguments to **switch** start with **-** then they are treated as options. The following options are currently supported:

- exact**     Use exact matching when comparing *string* to a pattern. This is the default.
- glob**        When matching *string* to the patterns, use glob-style matching (i.e. the same as implemented by the **string match** command).
- regexp**     When matching *string* to the patterns, use regular expression matching (i.e. the same as implemented by the **regexp** command).
- Marks the end of options. The argument following this one will be treated as *string* even if it starts with a **-**.

Two syntaxes are provided for the *pattern* and *body* arguments. The first uses a separate argument for each of the patterns and commands; this form is convenient if substitutions are desired on some of the patterns or commands. The second form places all of the patterns and commands together into a single argument; the argument must have proper list structure, with the elements of the list being the patterns and commands. The second form makes it easy to construct multi-line switch commands, since the braces around the whole list make it unnecessary to include a backslash at the end of each line. Since the *pattern* arguments are in braces in the second form, no command or variable substitutions are performed on them; this makes the behavior of the second form different than the first form in some cases.

If a *body* is specified as “**-**” it means that the *body* for the next pattern should also be used as the body for this pattern (if the next pattern also has a body of “**-**” then the body after that is used, and so on). This feature makes it possible to share a single *body* among several patterns.

Below are some examples of **switch** commands:

```
switch abc a - b {format 1} abc {format 2} default {format 3}
```

will return 2,

```
switch -regexp aaab {  
  ^a.*b$ -  
  b {format 1}  
  a* {format 2}  
  default {format 3}
```

will return 1, and

```
switch xyz {  
  a  
  -  
  b {format 1}  
  a* {format 2}  
  default {format 3}  
}
```

will return 3.

## A.56 tclvars

### Description

tclvars - Variables used by Tcl

The following global variables are created and managed automatically by the Tcl library. Except where noted below, these variables should normally be treated as read-only by application-specific code and by users.

#### **env**

This variable is maintained by Tcl as an array whose elements are the environment variables for the process. Reading an element will return the value of the corresponding environment variable. Setting an element of the array will modify the corresponding environment variable or create a new one if it doesn't already exist. Unsetting an element of **env** will remove the corresponding environment variable. Changes to the **env** array will affect the environment passed to children by commands like **exec**. If the entire **env** array is unset then Tcl will stop monitoring **env** accesses and will not update environment variables.

#### **errorCode**

After an error has occurred, this variable will be set to hold additional information about the error in a form that is easy to process with programs. **errorCode** consists of a Tcl list with one or more elements. The first element of the list identifies a general class of errors, and determines the format of the rest of the list. The following formats for **errorCode** are used by the Tcl core; individual applications may define additional formats.

#### **ARITH** *code msg*

This format is used when an arithmetic error occurs (e.g. an attempt to divide by zero in the **expr** command). *code* identifies the precise error and *msg* provides a human-readable description of the error. *code* will be either DIVZERO (for an attempt to divide by zero), DOMAIN (if an argument is outside the domain of a function, such as `acos(-3)`), IOVERFLOW (for integer overflow), OVERFLOW (for a floating-point overflow), or UNKNOWN (if the cause of the error cannot be determined).

#### **CHILDKILLED** *pid sigName msg*

This format is used when a child process has been killed because of a signal. The second element of **errorCode** will be the process's identifier (in decimal). The third element will be the symbolic name of the signal that caused the process to terminate; it will be one of the names from the include file `signal.h`, such as



**SIGPIPE**. The fourth element will be a short human-readable message describing the signal, such as ‘‘write on pipe with no readers’’ for **SIGPIPE**.

**CHILDSTATUS** *pid code*

This format is used when a child process has exited with a non-zero exit status. The second element of **errorCode** will be the process’s identifier (in decimal) and the third element will be the exit code returned by the process (also in decimal).

**CHILDSUSP** *pid sigName msg*

This format is used when a child process has been suspended because of a signal. The second element of **errorCode** will be the process’s identifier, in decimal. The third element will be the symbolic name of the signal that caused the process to suspend; this will be one of the names from the include file `signal.h`, such as **SIGTTIN**. The fourth element will be a short human-readable message describing the signal, such as ‘‘background tty read’’ for **SIGTTIN**.

**NONE**

This format is used for errors where no additional information is available for an error besides the message returned with the error. In these cases **errorCode** will consist of a list containing a single element whose contents are **NONE**.

**POSIX** *errName msg*

If the first element of **errorCode** is **POSIX**, then the error occurred during a POSIX kernel call. The second element of the list will contain the symbolic name of the error that occurred, such as **ENOENT**; this will be one of the values defined in the include file `errno.h`. The third element of the list will be a human-readable message corresponding to *errName*, such as ‘‘no such file or directory’’ for the **ENOENT** case.

To set **errorCode**, applications should use library procedures such as **Tcl\_SetErrorCode** and **Tcl\_PosixError**, or they may invoke the **error** command. If one of these methods hasn’t been used, then the Tcl interpreter will reset the variable to **NONE** after the next error.

**errorInfo**

After an error has occurred, this string will contain one or more lines identifying the Tcl commands and procedures that were being executed when the most recent error occurred. Its contents take the form of a stack trace showing the various nested Tcl commands that had been invoked at the time of the error.

### **tcl\_precision**

If this variable is set, it must contain a decimal number giving the number of significant digits to include when converting floating-point values to strings. If this variable is not set then 6 digits are included. 17 digits is “perfect” for IEEE floating-point in that it allows double-precision values to be converted to strings and back to binary with no loss of precision.

## A.57 tell

### Syntax

```
tell fileId
```

### Description

The **tell** command returns the current access position for an open file. Returns a decimal string giving the current access position in *fileId*. *fileid* must have been the return value from a previous call to **open**, or it may be **stdin**, **stdout**, or **stderr** to refer to one of the standard I/O channels.

## A.58 `time`

### Syntax

```
time script ?count?
```

### Description

The **`time`** command times the execution of a script. **`time`** will call the Tcl interpreter **`count`** times to evaluate **`script`** (or once if **`count`** isn't specified). **`time`** then returns a string of the form

```
503 microseconds per iteration
```

which indicates the average amount of time required per iteration, in microseconds. Time is measured in elapsed time, not CPU time.

## A.59 trace

### Syntax

```
trace option ?arg arg ...?
```

### Description

The **trace** command monitors variable accesses. **trace** causes Tcl commands to be executed whenever certain operations are invoked. At present, only variable tracing is implemented. The legal option's (which may be abbreviated) are:

#### **trace variable *name ops command***

Arrange for *command* to be executed whenever variable *name* is accessed in one of the ways given by *ops*. *name* may refer to a normal variable, an element of an array, or to an array as a whole (i.e. *name* may be just the name of an array, with no parenthesized index). If *name* refers to a whole array, then *command* is invoked whenever any element of the array is manipulated.

*Ops* indicates which operations are of interest, and consists of one or more of the following letters:

- r** Invoke *command* whenever the variable is read.
- w** Invoke *command* whenever the variable is written.
- u** Invoke *command* whenever the variable is unset. Variables can be unset explicitly with the **unset** command, or implicitly when procedures return (all of their local variables are unset). Variables are also unset when interpreters are deleted, but traces will not be invoked because there is no interpreter in which to execute them.

When the trace triggers, three arguments are appended to *command* so that the actual command is as follows:

```
command name1 name2 op
```

*name1* and *name2* give the name(s) for the variable being accessed: if the variable is a scalar then *name1* gives the variable's name and *name2* is an empty string; if the variable is an array element then *name1* gives the name of the array and *name2* gives the index into the array; if an entire array is being deleted and the trace was registered on the overall array, rather than a single element, then *name1* gives the array name and *name2* is an empty string. *op* indicates what operation is being performed on the variable, and is one of **r**, **w**, or **u** as defined above.

*command* executes in the same context as the code that invoked the traced operation: if the variable was accessed as part of a Tcl procedure, then *command* will have access to the same local variables as code in the procedure. This context may be different than the context in which the trace was created. If *command* invokes a procedure (which it normally does) then the procedure will have to use **upvar** or **uplevel** if it wishes to access the traced variable. Note also that *name1* may not necessarily be the same as the name used to set the trace on the variable; differences can occur if the access is made through a variable defined with the **upvar** command.

For read and write traces, *command* can modify the variable to affect the result of the traced operation. If *command* modifies the value of a variable during a read or write trace, then the new value will be returned as the result of the traced operation. The return value from *command* is ignored except that if it returns an error of any sort then the traced operation also returns an error with the same error message returned by the trace command (this mechanism can be used to implement read-only variables, for example). For write traces, *command* is invoked after the variable's value has been changed; it can write a new value into the variable to override the original value specified in the write operation. To implement read-only variables, *command* will have to restore the old value of the variable.

While *command* is executing during a read or write trace, traces on the variable are temporarily disabled. This means that reads and writes invoked by *command* will occur directly, without invoking *command* (or any other traces) again. However, if *command* unsets the variable then unset traces will be invoked.

When an unset trace is invoked, the variable has already been deleted: it will appear to be undefined with no traces. If an unset occurs because of a procedure return, then the trace will be invoked in the variable context of the procedure being returned to: the stack frame of the returning procedure will no longer exist. Traces are not disabled during unset traces, so if an unset trace command creates a new trace and accesses the variable, the trace will be invoked. Any errors in unset traces are ignored.

If there are multiple traces on a variable they are invoked in order of creation, most-recent first. If one trace returns an error, then no further traces are invoked for the variable. If an array element has a trace set, and there is also a trace set on the array as a whole, the trace on the overall array is invoked before the one on the element.

Once created, the trace remains in effect either until the trace is removed with the **trace vdelete** command described below, until the variable is unset, or until the interpreter is deleted. Unsetting an element of array will remove any traces on that element, but will not remove traces on the overall array.

This command returns an empty string.

**trace vdelete** *name ops command*

If there is a trace set on variable *name* with the operations and command given by *ops* and *command*, then the trace is removed, so that *command* will never again be invoked. Returns an empty string.

**trace vinfo** *name*

Returns a list containing one element for each trace currently set on variable *name*. Each element of the list is itself a list containing two elements, which are the *ops* and *command* associated with the trace. If *name* doesn't exist or doesn't have any traces set, then the result of the command will be an empty string.

## A.60 unknown

### Syntax

```
unknown cmdName ?arg arg ...?
```

### Description

The **unknown** command is used to handle attempts to use non-existent commands. **unknown** doesn't actually exist as part of Tcl, but Tcl will invoke it if it does exist. If the Tcl interpreter encounters a command name for which there is not a defined command, then Tcl checks for the existence of a command named **unknown**. If there is no such command, then the interpreter returns an error. If **unknown** exists, then it is invoked with arguments consisting of the fully-substituted name and arguments for the original non-existent command. **unknown** typically does things like searching through library directories for a command procedure with the name *cmdName*, or expanding abbreviated command names to full-length, or automatically executing unknown commands as sub-processes. In some cases (such as expanding abbreviations) **unknown** will change the original command slightly and then (re-)execute it. The result of **unknown** is used as the result for the original non-existent command.



## A.61 unset

### Syntax

```
unset name ?name name ...?
```

### Description

The **unset** command removes one or more variables. Each *name* is a variable name, specified in any of the ways acceptable to the **set** command. If a *name* refers to an element of an array then that element is removed without affecting the rest of the array. If a *name* consists of an array name with no parenthesized index, then the entire array is deleted. The **unset** command returns an empty string as result. An error occurs if any of the variables doesn't exist, and any variables after the non-existent one are not deleted.

## A.62 uplevel

### Syntax

```
uplevel ?level? arg ?arg ...?
```

### Description

The **uplevel** command executes a script in a different stack frame. All of the *arg* arguments are concatenated as if they had been passed to **concat**; the result is then evaluated in the variable context indicated by *level*. **uplevel** returns the result of that evaluation.

If *level* is an integer then it gives a distance (up the procedure calling stack) to move before executing the command. If *level* consists of # followed by a number then the number gives an absolute level number. If *level* is omitted then it defaults to **1**. *Level* cannot be defaulted if the first *command* argument starts with a digit or #.

For example, suppose that procedure **a** was invoked from top-level, and that it called **b**, and that **b** called **c**. Suppose that **c** invokes the **uplevel** command. If *level* is **1** or **#2** or omitted, then the command will be executed in the variable context of **b**. If *level* is **2** or **#1** then the command will be executed in the variable context of **a**. If *level* is **3** or **#0** then the command will be executed at top-level (only global variables will be visible).

**uplevel** causes the invoking procedure to disappear from the procedure calling stack while the command is being executed. In the above example, suppose **c** invokes the command

```
uplevel 1 {set x 43; d}
```

where **d** is another Tcl procedure. The **set** command will modify the variable **x** in **b**'s context, and **d** will execute at level 3, as if called from **b**. If it in turn executes the command

```
uplevel {set x 42}
```

then the **set** command will modify the same variable **x** in **b**'s context: the procedure **c** does not appear to be on the call stack when **d** is executing. The command “**info level**” may be used to obtain the level of the current procedure.

**uplevel** makes it possible to implement new control constructs as Tcl procedures (for example, **uplevel** could be used to implement the **while** construct as a Tcl procedure).

## A.63 upvar

### Syntax

```
upvar ?level? otherVar myVar ?otherVar myVar ...?
```

### Description

The **upvar** command creates a link to a variable in a different stack frame. **upvar** arranges for one or more local variables in the current procedure to refer to variables in an enclosing procedure call or to global variables. *Level* may have any of the forms permitted for the **uplevel** command, and may be omitted if the first letter of the first *otherVar* isn't # or a digit (it defaults to **1**). For each *otherVar* argument, **upvar** makes the variable by that name in the procedure frame given by *level* (or at global level, if *level* is **#0**) accessible in the current procedure by the name given in the corresponding *myVar* argument. The variable named by *otherVar* need not exist at the time of the call; it will be created the first time *myVar* is referenced, just like an ordinary variable. **upvar** may only be invoked from within procedures. *MyVar* may not refer to an element of an array, but *otherVar* may refer to an array element. **upvar** returns an empty string.

**upvar** simplifies the implementation of call-by-name procedure calling and also makes it easier to build new control constructs as Tcl procedures. For example, consider the following procedure:

```
proc add2 name {      upvar $name x      set x [expr $x+2] }
```

**add2** is invoked with an argument giving the name of a variable, and it adds two to the value of that variable. Although **add2** could have been implemented using **uplevel** instead of **upvar**, **upvar** makes it simpler for **add2** to access the variable in the caller's procedure frame.

If an upvar variable is unset (e.g. **x** in **add2** above), the **unset** operation affects the variable it is linked to, not the upvar variable. There is no way to unset an upvar variable except by exiting the procedure in which it is defined. However, it is possible to retarget an upvar variable by executing another **upvar** command.

## A.64 while

### Syntax

```
while test body
```

### Description

The **while** command executes a script repeatedly as long as a condition is met. **while** evaluates *test* as an expression (in the same way that **expr** evaluates its argument). The value of the expression must be a proper boolean value; if it is a true value then *body* is executed by passing it to the Tcl interpreter. Once *body* has been executed then *test* is evaluated again, and the process repeats until eventually *test* evaluates to a false boolean value. **continue** commands may be executed inside *body* to terminate the current iteration of the loop, and **break** commands may be executed inside *body* to cause immediate termination of the **while** command. **while** always returns an empty string.

## Glossary

### A

**AID Key** — Any 3270 special program key which causes the current screen to be sent to the 3270 SUT, and causes the SUT to transmit screen data back to the client.

**Aggregate** — A term used to identify a portion of a Flexible Computer Interface Format (FCIF) message. An aggregate contains zero or more tag-value pairs and is contained in an FCIF section.

**App-to-App** — Package that allows a user to send, receive, and analyze messages to and from a SUT over an application-to-application interface or a binary synchronous printer interface.

**Array** — A collection of associated variable elements.

**Asynchronous Terminal Interface** — An interface to an operating system or application that sends and receives data in arbitrarily-sized blocks at arbitrary times.

**Attributes** — **1.** The values defining the characteristics of a class or a class's connection, e.g., blinking, highlighted. **2.** The sub-commands used to specify or return attribute values. **3.** A category of methods and attributes that are used to find information about the SUT's configuration characteristics.

### B

**Background Execution Environment** — The combination of the Script Dispatchers, the Script Engine Groups, and the associated SEs.

**Background Script Engine** — SE process that communicates over an channel to a controlling process.

**BD** — See Boot Daemon

**BEE** — See Background Execution Environment

**Binary Synchronous Communication** — An IBM communications protocol that provides access to a 3270 data stream.

**Boot Daemon** — A platform process required by an SD that manages the SEs running on its machine.

**BSC** — See Binary Synchronous Communication

**BSE** — See Background Script Engine

### C

**Character Position** — The manner in which screen positions are referred to. The screen can be viewed as one long string, where the indices of that string map to a position on the screen. For instance, the first value of the string has a character position of 1, which would have a corresponding row/column value of {1 1}. The maximum character position, or the last position on the screen, varies from model type to model type, as different model types have different screen sizes. Model 2's max character

position is (24 x 80) 1920, while the bigger Model 5 has a max character position of (27 x 132) 3564.

**Child Script** — A Tcl script that is submitted for execution by a parent script

**Class** — A specific area or category of functionality.

**Class Command** — A command that gives you control over a class or category of functions.

**Clear Tag-value Database** — An ASCII file containing two columns separated by spaces or tabs. The first column contains the tag, and the second column contains the values.

**CLUI** — See Command Line User Interface

**Command Line Script Engine** — A MYNAH process that accepts Tcl commands from stdin and produces results on stdout. The Command Line Script Engine (CSE) does not interface with the MYNAH System database, but does, however, open a channel.

**Concatenate** — To put two items together, end to end. For example, if you concatenated the strings "uvw" and "xyz", you get "uvwxyz". If you concatenate two files, the new file contains the contents of both files, presented sequentially.

**Concurrency Group** — The set of all scripts that run on one Script Dispatcher

**Config file** — The MYNAH Configuration File (named *xmyConfig*) that resides in the directory *\$XMYHOME/config*.

**CSE** — See Command Line Script Engine

## D

**des** — A UNIX command to encrypt or decrypt data using the Data Encryption Standard.

**Domain** — A type of interface provided to the System Under Test. Examples of domains are the asynchronous terminal interface of an application, the application-to-application interface of an application, and the synchronous printer interface of an application.

**Domain Connection** — Any specific input/output interface to a SUT.

## E

**EAB** — See Extended Attribute Bytes, used in 3270 to provide more information about a field, such as color attributes.

**EHLAPI** — See Emulator High Level Language Application Programmatic Interface.

**Elements** — Components of a list or array.

**Embedded Script Engines** — Script Engines that graphically display the screens associated with Term3270 or TermAsync Packages. Embedded Script Engines (ESEs) offer script execution functionality through class methods. ESEs are not separate processes.

**Emulator High Level Language Application Programmatic Interface** — The IBM specification API for interacting with a 3270 host providing the essential functionality underneath the MYNAH 5.0 3270 Terminal domain.

**Encrypted Database** — A clear database that has been encrypted using des

**ESE** — See Embedded Script Engine

**Exception** — Any event that can abort a script.

**Extended Attribute Bytes** — Used by the Term3270 Package to provide more information about a field, such as color attributes.

**Extended Tcl** — See TclX.

**Extensions** — Commands and procedures that expand Tcl's capabilities.

## F

**FCIF** — Flexible Computer Interface Format. FCIF is a text format developed at Bellcore for communicating messages between processes.

**FMM** — See Flexible Message Manager (TraxWay-provided wrapper to Telexel IPC)

**Flexible Message Manager** — A TraxWay-provided wrapper to Telexel IPC. An inter-process communication module used by the MYNAH System that uses the Telexel directory daemon underneath to do the actual IPC processing.

**Focusing** — Selecting a MYNAH GUI element and making it ready for you to enter information.

## G

**Global Array** — An array of elements that are available to all domains.

**GUI** — Graphical User Interface.

## H

**Handle** — A reference to an instance.

**hllc()** — The native EHLLAPI call. EHLLAPI makes use of one function, the hllc() function, which always takes four parameters. These four parameters determine what EHLLAPI function to execute, the input parameters to that function, and, afterwards, return the output of that function's execution, should there be any. The four parameters are commonly referred to as (and passed to the hllc() function in this order): Function Number, Data String, Data String Length or Buffer Size, and Presentation Space. This design refers to the specific EHLLAPI function simply as hllc(*function\_number*). For instance, the EHLLAPI function Connect Presentation Space corresponds to hllc(1).

## I

- Icon** — An X-Window that has been closed using a window manager function.
- Iconified** — The state of an X-Window after it has become an icon.
- Instances** — Connections made to SUTs using a class command.
- IPC** — Inter-process Communication  
Telexel IPC processes

## J

- Job Status Container** — MYNAH GUI tool used to monitor the scripts that have submitted to the BEE.

## L

- List** — An ordered collection of elements.
- Log File** — A file containing a record of activity for a software product.

## M

- Mask** — A way to identify data that will be ignored during a comparison.
- Methods** — Sub-commands used to perform particular actions on instances you create in Tcl.
- MYNAH System** — An advanced software environment that can be used in all phases of software testing to exercise and analyze mainframe, minicomputer, and workstation applications. The MYNAH System can also be used for task automation and rapid application development.

## O

- OA** — See Operability Agent
- OM** — See Operability Manager
- Operability Agent** — A MYNAH process that manages all MYNAH required processes on a host, communicating the start, stop and status requests to individual processes and then communicating the reply back to the OM.
- Operability Management** — The MYNAH mechanism, consisting of the OA and OM, that lets the MYNAH Administrator start, stop, and get status of all of the MYNAH processes from any host.

- Operability Manager** — A set of commands used interact with an OA to manage all MYNAH processes. You can start or stop a process or you can determine if a process is running status.

## P

- Parent Script** — A Tcl script that submits other scripts for execution.
- position *position*** — One of the ways of specifying screen location to a 3270 Tcl command. The position is a list of two integer values, row and column in that order. Example: -position {1 1}.
- Presentation space** — The 3270 screen that the EHLLAPI function call will affect and/or perform its action upon.



**PRINTCOM** — A program that interfaces to applications on a host computer over a binary synchronous communication line, receiving and capturing the printer output sent by the applications.

**Process** — An executable program that is active (running).

**Prt3270** — MYNAH Package that lets a user simulate PRINTCOM processes.

## R

**Regression Testing** — The testing of a previously verified application after changes have been made to the application.

**Requesting Process** — A process that sends a script-execution request to the SD (this does not include an SE sending a child-script-execution request to the SD).

**Resource, X-Window System** — A default value that can be changed by a user. Sets of resources are commonly stored in the *~/.Xdefaults* file (i.e., the file called ".Xdefaults" in your home directory).

**Root Script** — A script submitted to an SD via the GUI, CLUI, CSE, or an embedded SE, but not from one of the SEs that is controlled by the SD.

**Runtime** — A state in which a script is being executed.

**Runtime Analysis** — data Analysis that occurs during the execution of a test, and provides verification that the application being tested performed as expected. An example of runtime analysis is a comparison statement in a test script.

## S

**Screen Definition File** — A file containing a tag name table. One file exists for each screen in a user's application. The file may contain other information in addition to the tag name table. The tag name table is delimited in this file by "begin" and "end" statements.

**Screen IDs File** — A file containing the names of screens and other information to uniquely identify one screen from another.

**Script** — A file that contains one or more instructions to be performed by a domain.

**Script Dispatcher** — MYNAH process that provides scheduling and concurrency control for background execution of user scripts.

**Script Engine** — An extended Tcl interpreter that runs user scripts.

**Script Engine Group** — A logical set of BSEs controlled by an SD that all run on one host and run in the same mode. When a script is submitted to the BEE, it is submitted to run in a particular SE Group. It will run on one of the SEs in that group, but it doesn't matter which SE in the group it runs on.

**Script Builder** — A MYNAH GUI tool used to create script code by capturing interactions with a system, importing templates and procedures, and existing script code. A Standalone Script Builder can be run independently of the rest of the MYNAH GUI.

**Script Object** — A MYNAH GUI object used to create and track script code.

**SD** — See Script Dispatcher.

**SE** — See Script Engine.

**SNA** — See Systems Network Architecture.

**String** — In Tcl: A set of characters that represents the current value of a variable. In some cases, strings show what will appear on the screen or in a printout.

**SUT** — System Under Test.

**Symbol Table** — User-supplied data associated with a script. Symbol tables contain symbol-value pairs; they can be read and modified by the script during execution.

### **Synchronous Terminal**

**Interface** — An interface to an operating system or application that sends and receives data in blocks of predefined size at regular intervals.

### **Systems Network**

**Architecture** — An IBM communications protocol that provides access to a 3270 data stream.

**System Under Test** — The system you wish to test or which contains the application you wish to automate.

## **T**

**TagDir** — A directory containing Tag Name files.

**Tag Table** — A formatted table in a screen definition file, containing screen information for a single screen. For each user-identified screen field this table has a name for the field (called a tag name), the field's row and column location, and the number of characters in the field.

**Tag Name File** — A file containing tag-value pairs, used for locating items on a synchronous screen.

**Tag-value Pair** — A pair of items, the first being a variable, the second being the value of that variable. Tag-value pairs reside in a symbol table.

**Tags** — User defined labels used by the Term3270 Package for locating items on a synchronous screen.

**Tcl** — Tool Command Language. An interpretive programming language, implemented as a library of C procedures, developed by John Ousterhout. Tcl is the basis for the MYNAH scripting language.

**TclIX** — Extended Tcl, flavor of Tcl used by the MYNAH System under license from NeoSoft.

**Term3270** — Package that performs 3270 synchronous terminal emulation, allowing users to build scripts that simulate an interactive work session with a SUT.

**TermAsync** — Package that performs asynchronous terminal emulation, allowing users to build scripts that simulate an interactive work session with a SUT.

**Terminal Emulation** — The use of software to emulate a type of hardware terminal (e.g., vt100, 3278).

**TOPCOM** — A software product that provides an interface to allow an application to establish and accept Transaction Oriented Protocol (TOP) sessions with a foreign partner, to send and receive messages to and from the partner, and to terminate the sessions. TOPCOM uses X.25 or TCP/IP transport services to transport the application data messages and TOP protocol messages between the two partners.

**TOP** — Extension Package that lets a user simulate TOPCOM processes.

## V

**Variable** — A user defined quantity that can assume a value.



## Index

### A

Adding Elements to Lists, 4-29  
append, A-2  
Appending Lists, 4-27  
Application-to-Application  
    *See Also* FCIF Package  
    *See Also* TCP Package  
    *See* MsgDir Package  
    *See* PRT3270 Package  
    *See* TOP Package  
Arithmetic Operators, 4-8  
array, A-3  
Arrays, 4-21  
    Contrast to Lists, 4-21  
    Creating, 4-35  
Asynchronous Request, Canceling, 8-4  
Asynchronous Terminals  
    *See* TermAsync Package  
Attributes  
    Definition, 1-8  
    Listing Valid Values  
        Term3270 Package, 10-30  
        TermAsync Package, 9-15  
    Overview  
        Term3270 Package, 10-3  
        TermAsync Package, 9-2  
    PRT3270 Package  
        Receive Session Number, 13-22  
        Receive Status, 13-22  
        Receive Time Stamp, 13-23  
    Returning Current Values  
        Term3270 Package, 10-28  
        TermAsync Package, 9-14  
    TCP Package  
        Receive Time Stamp, 16-32  
    Term3270 Methods, 10-2  
    TermAsync Attributes, 9-3  
    TermAsync Methods, 9-2  
    TOP Package  
        Receive Session Number, 12-27  
        Receive Status, 12-28  
        Receive Time Stamp, 11-29, 12-29  
        Send Session Number, 12-30

Send Status, 12-31  
Send Time Stamp, 12-32

Attributes, definition, 1-3

### B

Background Execution Environment  
    *See* BEE  
Backslash  
    Backslash Sequences, 4-17  
    Used in Substitution, 4-16  
    Using to Insert Special Characters, 4-16  
Batch Package  
    Condition Codes, 17-11  
    Deleting a Job, 17-5  
    Hosts  
        Querying for, 17-7  
        Specifying, 17-2  
    Implementation as Tcl Procedures, 17-1  
    Job IDs, 17-8  
    .netrc File, 17-14  
    Returning Condition Codes, 17-11  
    Returning Job ID, 17-8  
    Returning Job Status, 17-9  
    Returning Number of Steps in Job, 17-10  
    Status of Jobs, 17-9  
    Step Results, 17-11  
    Steps Reported in a Job, 17-10  
    Submitting a Batch Job, 17-1  
    Waiting for a Response, 17-13  
BEE, 2-10, 3-2  
    Concurrency, 2-10  
    File Ownership, 3-12  
    Permissions, Execution Directory, 3-12  
    Relation Between SDs and SE Groups,  
        2-10  
    SE Groups, 2-10  
    Submitting Scripts  
        From the CLUI, 2-11  
        From the GUI, 2-12  
Bitwise Operators, 4-10  
Braces, 4-19  
    Suppressing Variable Substitution, 4-19  
    Used to Defer Evaluation, 4-19

break, A-5

Buffer Size, 9-10, 9-25

## C

Carriage Returns in Differenced Files, 7-12

case, A-6

catch, A-7

catch Command, 4-46

cd, A-8

checktags, 14-5

Child Script Events, 2-26

Child Script Package

    Canceling Asynchronous Request, 8-4

    Creating a Connection, 8-2

    Data

        Sending to an Application, 8-9

        Waiting for Responses, 8-10

    Disconnecting a Connection, 8-5

    Loading, 8-1

    Pausing a Request, 8-6

    Request

        Pausing, 8-6

        Resuming, 8-7

    Requests

        Sending, 8-8

    Resuming a Request, 8-7

    SDs, 8-2

    SE Groups, 8-2

    Sending a Request, 8-8

    Sending Data to an Application, 8-9

    Specifying

        SDs, 8-2

        SE Groups, 8-2

    Timeout

        Returning, 8-2

        Specifying, 8-2

    Waiting for Responses, 8-10

    Waiting Until all Scripts Complete, 8-11

    Waiting Until any Scripts Complete, 8-12

Class Command, 1-5

Classes of functionality, 1-5

Clear Tag-Value Database, 3-3

close, A-9

Closing Files, 4-58

CLUI, 2-1

    Submitting Scripts, 2-11

    xmyCmd Command, 2-11, 2-39

Columns

    Returning Current Position

        Term3270 Package, 10-39

        TermAsync Package, 9-25

    Using to Move a Cursor on a 3270 Screen,  
    10-31

    Using to Return 3270 Screen Images,  
    10-32

    Using to Specify 3270 Screen Location,  
    10-10

Command Line User Interface

    See CLUI

Comments, 4-20

Compare Events, 2-27

Compare Master, 5-1, 7-6, 10-7

    3270, 10-7

    Async, 9-8

    expectMaster, 5-1

    Region dimension restriction, 5-2

    Suppressing creation, 5-3, 6-2

compares File, 2-18

    Child Script Events, 2-26

    Compare Events, 2-27

    Event Categories, 2-25

    Exception Events, 2-28

    Format, 2-23

    Language Events, 2-28

    Script Events, 2-29

    Summary Events, 2-30

    SUT Timing (suttiming) Events, 2-32

    Sutimage Events, 2-31

    Test Object Events, 2-32

    User Events, 2-33

Comparing a Region

*See Also* Masks

    See Comparisons

Comparing Differences Between Files, 7-11,  
7-31

Comparisons

    Category Definition, 1-10

    Commands that Create Output, 2-27

    compares File, 2-18, 2-23

- Comparing Differences Between Files, 7-11, 7-31
- Disabling Masks
  - Term3270 Package, 10-19
  - TermAsync Package, 9-11
- Enabling Masks
  - Term3270 Package, 10-21
  - TermAsync Package, 9-13
- Failed, 6-8
- FCIF Package
  - Check for Extra Tags, 14-11
  - Comparing FCIF Tags, 14-7
  - Comparing to Master FCIF Message, 14-5
  - Getting FCIF Values, 14-13
  - offset, 14-7
  - Reordering Sections, 14-14
- General Extensions, 7-2, 7-6
- Good, 6-10
- Ignoring a Region, 7-20
- Ignoring a Region on a 3270 Screen, 10-29
- Maximum, 6-12
- Number of Failed
  - Term3270 Package, 10-41
  - TermAsync Package, 9-26
- Number of Successful
  - Term3270 Package, 10-41
  - TermAsync Package, 9-27
- Number of Warnings
  - Term3270 Package, 10-48
  - TermAsync Package, 9-30
- PRT3270 Package
  - Listen Mode, 13-16
  - Matching Messages, 13-17
  - Specifying Tcl Procedure, 13-17
- Regions, 5-1, 9-7, 10-8
- See Also* Masks
- See Also* Tests
- TCP Package
  - Listen Mode, 16-24
  - Matching Messages, 16-26
  - Specifying Tcl Procedure, 16-26
- Term3270 Attributes, 10-4
- Term3270 Methods, 10-2
- Term3270 Package, 10-14
- TermAsync Attributes, 9-3
- TermAsync Methods, 9-1
- TermAsync Package, 9-7
- TOP Package
  - Listen Mode, 12-19
  - Matching Messages, 12-21
  - Specifying Tcl Procedure, 12-21
- Updating Counters, 6-20
- Using the Compare Master, 5-1
- Warnings, 6-21
- concat, A-10
- Concealing Sensitive Data, 3-1
  - Obtaining From Scripts in the Background, 3-2
  - Prompting Using the Script Builder, 3-1
  - Scrambling Encryption Keys, 7-42
  - See Also* xmyCmd
  - See Also* xmyUdb
  - TermAsync *SUTimages* Files, 3-8
- Concurrency, 2-10
- Connections
  - Accepting
    - TCP Package, 16-5
  - Connection ID
    - TCP Package, 16-20
  - Creating
    - Child Script Package, 8-2
    - DCE Package
      - Emulated Client, 18-5
      - Emulated Server, 18-8
    - FCIF Package, 14-3
    - MsgDir Package, 15-4
    - PRT3270 Package, 13-5
    - TCP Package, 16-7, 16-23
    - Term3270 Package, 10-16
    - TermAsync Package, 9-9
    - TOP Package, 12-5
  - Deleting
    - TCP Package, 16-9
  - Deleting a Batch Job, 17-5
  - Disconnecting
    - Child Script Package, 8-5
    - DCE Package, 18-74
    - FCIF Package, 14-10
    - MsgDir Package, 15-2
    - PRT3270 Package, 13-7
    - TCP Package, 16-10
    - Term3270 Package, 10-20
    - TermAsync Package, 9-12

- TOP Package, 12-7
- General Extensions, 7-1
- Handle Names, 1-6
- Handles, 1-6
- Instances, 1-6
- Listing Open Connections
  - PRT3270 Package, 13-12
  - TCP Package, 16-19
  - Term3270 Package, 10-40
  - TermAsync Package, 9-26
  - TOP Package, 12-14
- Maintaining Between Scripts, 2-14
- Maximum number, 8-2, 9-9, 10-16, 12-5
- No Reinitialization Between Script Executions, 2-15
- PRT3270 Package
  - Receive Status, 13-22
  - Receive Time Stamp, 13-23
  - Returning a Connection Name, 13-20
  - Returning a PRT3270 Handler, 13-21
  - Returning Receive Session Number, 13-22
  - Specifying a Connection Name, 13-20
  - Specifying a PRT3270 Handler, 13-21
- Receiving messages
  - TCP Package, 16-11
- Returning a Connection Name, 9-10, 9-27, 10-17, 10-45
- Sending
  - TCP Package, 16-13
- Specifying a Connection Name, 9-10, 9-27, 10-17, 10-45
- State, 10-46
- Status, 9-29, 10-47
- Submitting a Batch Job, 17-1
- TCP Package
  - Receive Time Stamp, 16-32
  - Returning a Connection Name, 16-29
  - Specifying a Connection Name, 16-29
- Term3270 Attributes, 10-3
- Term3270 Methods, 10-1
- TermAsync Attributes, 9-2
- TermAsync Methods, 9-1
- TOP Package
  - DTN, 12-17
  - PSN, 12-26
  - Receive Status, 12-28
  - Receive Time Stamp, 11-29, 12-29
  - Returning a Connection Name, 11-26, 12-25
  - Returning a TOPCOM Handler, 12-34
  - Returning Receive Session Number, 12-27
  - Returning Send Session Number, 12-30
  - Send Status, 12-31
  - Send Time Stamp, 12-32
  - Specifying a Connection Name, 11-26, 12-25
  - Specifying a TOPCOM Handler, 12-34
- ConnOnly Mode, 2-14
  - Effect of Exceptions, 3-9
- Constants, DCE Package, 18-73
- continue, A-11
- Control Flows, 4-36 to 4-45
  - break Command, 4-41
  - continue Command, 4-42
  - eval Command, 4-45
  - for Command, 4-39
  - foreach Command, 4-40
  - if Command, 4-36
  - See Also* Looping Controls
  - switch Command, 4-43
  - while Command, 4-38
- Controlling the Flow of Execution of a Script, 4-36
  - See Also* Control Flows
- Conversion of Expressions, 4-14
- Conversion runtime procedures, 20-1
  - Converted ADDAM Scripts, 20-52
  - Converted Tsf Scripts, 20-73
  - FIN and FUR scripts, 20-31
  - Fin Scripts, 20-1
  - FUR scripts, 20-13
- Converting Between Strings and Lists, 4-33



- Creating a Connection
  - Child Script Package, 8-2
  - Term3270 Package, 10-16
  - TermAsync Package, 9-9
- Creating Lists, 4-22 to 4-25
  - Concatenating Elements, 4-23
  - Using the concat Command, 4-23
  - Using the list Command, 4-24
  - Using the set Command, 4-22
- Creating Scripts
  - Overview, 2-1
  - Using an Editor, 2-3
  - Using Script Objects, 2-4
  - Using the Script Builder, 2-6
- Cursor
  - Moving on a 3270 Screen, 10-22, 10-24, 10-31
  - Returning Position, TermAsync Package, 9-28
- D**
- Data
  - Associated with MsgDir Package Position, 15-5
  - Finding on a 3270 Screen, 10-25
  - General Extensions, 7-1
  - PRT3270 Package
    - Appending Messages, 13-10
    - Converting Messages, 13-13
    - Maximum Number of Messages, File Name, 13-19
    - Receiving Messages
      - File Name, 13-15
      - Last Received, 13-14
  - Receiving
    - PRT3270 Package, 13-8
    - TOP Package, 12-8
  - Receiving at Script Execution, 7-25
  - Returning Number of Bytes Received, 10-40
  - Sending
    - TOP Package, 12-10
    - Message size, 12-10
  - Sending to an Application
    - Child Script Package, 8-9
    - Delaying, 9-10, 9-26
    - Term3270 Package, 10-36
    - TermAsync Package, 9-20, 9-22
  - Simulating Pressing a 3270 Function Key, 10-34, 10-35
  - TCP Package
    - Appending Messages, 16-15
    - Creating connection, 16-23
    - Receiving Messages
      - File Name, 16-22
      - Last Received, 16-21
    - Receiving messages, 16-18
    - Specifying application name, 16-17
  - Term3270 Attributes, 10-4
  - Term3270 Methods, 10-1
  - TermAsync Attributes, 9-3
  - TermAsync Methods, 9-1
  - TOP Package
    - Appending Messages, 12-12
    - Converting Messages, 12-15
    - Maximum Number of Messages, File Name, 12-23
    - Maximum Segment Length, File Name, 12-24
    - Receiving Messages
      - File Name, 12-18
      - Last Received, 12-16
  - Waiting for Responses
    - Child Script Package, 8-10
    - Term3270 Package, 10-37
    - TermAsync Package, 9-22, 9-23
- Database
  - Clear Tag-value, 3-3
  - Encrypted, 3-3
  - Loading User Files, 7-40
- Database Mode, 6-3
- Database Output, 2-37
  - Result Object, 2-37
  - Runtime Object, 2-37
- Date Functions, 7-8
- DCE Package
  - Client Development, 18-3
  - Constants, 18-73
  - DCE Architecture, 18-2
  - Emulated Client
    - Definition, 18-4
    - RPC Calls, 18-69
    - Starting, 18-5

- Waiting for Output, 18-7
  - Emulated Server
    - Definition, 18-4
    - RPC Calls, 18-72
    - Starting, 18-8
    - Starting a Long-Running Server, 18-10
    - Waiting for Output, 18-9
  - Getting the Name of the Interface, 18-79
  - Getting the Type of an Object, 18-71
  - Handles
    - Deleting, 18-75, 18-76
      - All Handles, 18-77
      - Data Handles, 18-77
    - Restoring, 18-78
    - Saving, 18-78
  - IDL
    - IDL File, 18-3
    - IDL Types, 18-14 to 18-68
      - Categories, 18-14
      - See Also* IDL
  - Integrating with MYNAH System Using TermAsync Commands, 18-80
  - Interface
    - Definition, 18-2
    - Getting the Name of, 18-79
  - Interface Object
    - Identifier of the Interface, Obtaining, 18-11
    - Listing Defined Constants, 18-13
    - Listing Defined Operations, 18-13
    - Listing Defined Types, 18-13
    - Major Version of the Interface, Obtaining, 18-11
    - Minor Version of the Interface, Obtaining, 18-12
    - Name of the Interface, Obtaining, 18-11
    - Running as Emulated Client, 18-12
    - Running as Emulated Server, 18-12
  - Objects
    - Deleting, 18-75
    - Removing, 18-74
  - Printing Objects, 18-70
  - Recording Entries, 18-80
  - Recording Exit Status, 18-81
  - RPC Calls
    - Emulated Client, 18-69
    - Emulated Server, 18-72
    - TermAsync Commands, 18-82
  - Scripting Overview, 18-4
  - Server Development, 18-3
  - TermAsync Commands, 18-80
    - Calling the RPC, 18-82
    - Recording Entries, 18-80
    - Recording Exit Status, 18-81
    - See Also* TermAsync Package
  - Debugging, 3-9, 4-46
    - catch Command, 4-46
    - Error Information Procedures, 3-9, 4-46
    - Error Processing, 3-10
    - errorCode Variable, 4-47
    - errorInfo Variable, 4-48
    - General Actions, 3-10
    - Global Variables, 3-9
    - Using xmytclsh, 4-59
  - Deferring Evaluation, 4-19
  - des, 3-2, 3-3, 3-4
    - Encrypting Data, 3-2
    - Specifying a Key, 3-4
    - Using to Encrypt a Database, 3-4
  - destroy, 14-10
  - Destroying a Connection
    - Child Script Package, 8-5
    - Term3270 Package, 10-20
    - TermAsync Package, 9-12
  - Differences Between Files
    - Carriage Returns, 7-12
    - General Extensions, 7-11, 7-31
  - Domain, 1-3
  - Double Quotes, 4-18
- ## E
- Editors
    - Using to Create Scripts, 2-3
  - Elements
    - Adding to a List, 4-29
    - Appending to a List, 4-27
    - Components of Lists, 4-21
    - Extracting From Lists, 4-30
    - Inserting in a List, 4-28
    - Number in a List, 4-25
    - Replacing in a List, 4-29
-

- 
- Searching for in a List, 4-31
  - Embedded Spaces, 4-16
  - Emulated Client
    - Definition, 18-4
    - Running Status of Interface, 18-12
    - Starting, 18-5
    - Waiting for Output, 18-7
  - Emulated Server
    - Definition, 18-4
    - Running Status of Interface, 18-12
    - Starting, 18-8
    - Starting a Long-Running Server, 18-10
    - Waiting for Output, 18-9
  - Emulated Terminal, 9-9, 9-30
  - Encrypted Data
    - Databases, 3-3
    - des, 3-3
    - Loading, 7-40
    - Scrambling Encryption Keys, 7-42
    - Using, 3-6
  - Encrypted Databases, 3-3
    - Encrypting Using des, 3-4
  - Engine Modes, 6-4
  - Engine Types, 6-5
  - Entering Sensitive Data, 3-2
  - eof, A-12
  - error, A-13
  - Errors
    - See Also* Exceptions
    - See* Debugging
  - Escape Sequences, 4-17
  - eval, A-14
  - Exception Events, 2-28
  - Exceptions, 3-9, 4-46
    - catch Command, 4-46
    - Error Processing, 3-10
    - errorCode Variable, 4-47
    - errorInfo Variable, 4-48
    - Global Variables, 3-9, 4-47
    - MYNAH System Handling Procedures, 3-9
    - See Also* Debugging
    - Tcl Procedures, 3-9, 4-46
  - exec, A-15
  - Executing Scripts
    - eval Command, 4-45
    - Overview, 2-2
    - Using the Script Builder, 2-8
    - Without Database Update, 2-39
  - Execution Directory Permissions, 3-12
  - Execution Modes, 6-4
    - ConnOnly, 2-14
    - FullState, 2-15
    - Stateless, 2-14
  - exit, A-18
  - Exit Handlers
    - Called at Maximum Failed Comparisons, 6-13
    - ExitHandler, 6-6
    - MaxFailsHandler, 6-13
    - TimeoutHandler, 6-19
  - ExitHandler, 6-6
  - expectMaster, 5-1
  - expr, A-19
  - Expressions, 4-7 to 4-14
    - Conversion, 4-14
    - Creating Using the expr Command, 4-4
    - Mathematical Functions, 4-13
      - Math Functions, 4-14
      - Trig Functions, 4-13
    - Operands, 4-7
  - extended Tcl, 1-1
  - Extension
    - Functional Categories, 1-10
  - Extensions
    - Definition, 1-3
    - Loading, 2-14, 7-18
    - Unloading, 7-38
  - Extracting Elements From Lists, 4-26, 4-30
  - extratags, 14-11
- F**
- FCIF Package, 14-1
    - Comparisons
      - Check for Extra Tags, 14-11
      - Comparing FCIF Tags, 14-7
      - Comparing to Master FCIF Message, 14-5
-

- Getting FCIF Values, 14-13
  - offset, 14-7
  - Reordering Sections, 14-14
- Connections
  - Creating, 14-3
  - Disconnecting, 14-10
  - Loading, 14-1
- Fields on a 3270 Screen
  - Moving to a Specified Field, 10-22
  - Moving to the Next Field, 10-24
  - Returning the Length of a Field, 10-23
- file, A-24
- File Ownership, 3-12
- Files
  - Closing, 4-58
  - Input/Output Functions, 4-55
  - Loading, 7-40
  - Opening, 4-56
  - Reading Lines, 7-26
- Floating-point Numbers, 4-7, 4-14
- flush, A-27
- for, 4-39, A-28
- foreach, 4-40, A-29
- format, A-30
- Formats
  - Returning Current Screen Name, 10-41
  - See Also* Screen Identification File
  - Using to Find Screen Locations, 10-27
- FullState Mode, 2-14, 2-15
- Function Keys
  - Counting Number Pressed, 10-43
  - Counting Usage of, 10-17, 10-39
  - Last Key Pressed, 10-43
  - Sending, 10-34
  - Sending and Waiting for a Response, 10-35

## G

- General Extensions, 7-1 to 7-43
  - Comparisons, 7-6
  - Date and Time Functions, 7-8
  - Exiting From Scripts, 7-3, 7-16
    - Exit Handler, 7-16
    - Specifying an Exit String, 7-16

- Masks
  - Creating, 7-20
  - Destroying, 7-22
  - Disabling, 7-23
  - Enabling, 7-23
  - Masks, 7-20 to 7-23
- Pausing Scripts, 7-32
- Prompting for Sensitive Data, 7-25
- Reading Lines of a File, 7-26
- Receiving at Script Execution, 7-25
- Regular Expressions, Searching for, 7-29
- Returning Current Location, 7-17
- Tests
  - Beginning, 7-4
  - Ending, 7-15
  - Updating Results Object, 7-39
  - Writing Output, 7-24
- gets, A-33
- glob, A-34
- global, A-35
- Global Script Variables, 6-1 to 6-21
- Global Variables, 4-47, 4-51, 4-52
  - global Command, 4-52
  - xmyVar Array, 6-1 to 6-21
- Globbering, 4-53
- Graphical User Interface
  - See* GUI
- GUI, 2-1
  - Insert Template Dialog, 2-40
  - Submitting Scripts, 2-12

## H

- Handles, definition, 1-6
- Help Facility, TclX, 1-2
- history, A-36
- Hosts
  - Querying for Batch Hosts, 17-7
  - Returning Current, 10-42
  - Specifying, 10-16
  - Specifying for Batch Jobs, 17-2

---

## I

- IDL, 18-2
  - IDL File, 18-3
  - IDL Types, 18-14 to 18-68
    - Arrays, 18-17
      - Constructing, 18-17
      - Elements, 18-17
      - Indexing, 18-18
    - Bool Object, 18-19
      - Constructing, 18-19
      - Returning Boolean Value, 18-19
      - Setting Boolean Value, 18-20
    - Buffer Object, 18-21
      - Constructing, 18-21
      - Getting a Stored Value, 18-21
      - Setting a Value, 18-22
      - Size of Largest String, 18-22
    - Byte Object, 18-23
      - Constructing, 18-23
      - Getting a Stored Value, 18-23
      - Setting a Value, 18-24
    - Categories, 18-14
    - Char Object, 18-25
      - Constructing, 18-25
      - Getting a Stored Value, 18-25
      - Setting a Value, 18-26
    - Double Object, 18-27
      - Constructing, 18-27
      - Getting a Stored Value, 18-27
      - Setting a Value, 18-28
    - Enumeration Object, 18-29
      - Constructing, 18-29
      - Getting a Stored Value, 18-29
      - Listing Legal Value, 18-30
      - Setting a Value, 18-30
    - error\_status\_t Object (DCE Error Codes), 18-31
      - Constructing, 18-31
      - Getting a Symbolic Representation Value, 18-31
      - Listing Legal Value, 18-32
      - Setting a Value, 18-32
    - Floating Point Number Object, 18-33
      - Constructing, 18-33
      - Getting a Stored Value, 18-33
      - Setting a Value, 18-34
    - Floating Point Numbers
      - 32-bit, 18-33
      - 64-bit, 18-27
    - handle\_t Object (Connection to Server), 18-35
      - Binding Object to Server, 18-37
      - Constructing, 18-35
      - Getting a Stored Value, 18-36
      - Setting a Value, 18-37
      - Setting Authentication, 18-39
    - Hyper Object, 18-40
      - Constructing, 18-40
      - Getting a Stored Value, 18-40
      - Setting a Value, 18-41
    - Integers
      - Signed
        - 16-bit, 18-50
        - 32-bit, 18-42
        - 64-bit, 18-40
        - 8-bit, 18-52
      - Unsigned
        - 16-bit, 18-65
        - 32-bit, 18-60
        - 64-bit, 18-58
        - 8-bit, 18-23, 18-25, 18-67
    - Long Object, 18-42
      - Constructing, 18-42
      - Getting a Stored Value, 18-42
      - Setting a Value, 18-43
    - Pipe Object, 18-44
      - Constructing, 18-44
      - Dumping to File, 18-45
      - Reading a File, 18-46
      - Setting a Sink for Output Pipe, 18-45
      - Setting Source for Input Pipe, 18-44
    - Pointer Object, 18-47
      - Constructing, 18-47
      - Deferring, 18-48
      - Getting Handle of an Object, 18-47
      - Returning the Address in a Real Pointer, 18-49
      - Setting Pointer to an Object, 18-48
    - Short Object, 18-50
      - Constructing, 18-50

- Getting a Stored Value, 18-50
  - Setting a Value, 18-51
  - Small Object, 18-52
    - Constructing, 18-52
    - Getting a Stored Value, 18-52
    - Setting a Value, 18-53
  - String Object, 18-54
    - Constructing, 18-54
    - Getting a Stored String, 18-54
    - Setting a Value, 18-55
  - Structure Object, 18-56
    - Constructing, 18-56
    - Constructing With Conformant Array, 18-56
    - Listing all Members, 18-57
    - Retrieving Members by Name, 18-57
  - Uhyper Object, 18-58
    - Constructing, 18-58
    - Getting a Stored Value, 18-58
    - Setting a Value, 18-59
  - Ulong Object, 18-60
    - Constructing, 18-60
    - Getting a Stored Value, 18-60
    - Setting a Value, 18-61
  - Union Object, 18-62
    - Constructing, 18-62
    - Getting the Name of the Discriminant, 18-63
    - Listing all Members, 18-62
    - Retrieving Currently Valid Union Name, 18-64
    - Retrieving Members by Name, 18-63
    - Retrieving the Discriminant by Name, 18-64
  - Ushort Object, 18-65
    - Constructing, 18-65
    - Getting a Stored Value, 18-65
    - Setting a Value, 18-66
  - Usmall Object, 18-67
    - Constructing, 18-67
    - Getting a Stored Value, 18-67
    - Setting a Value, 18-68
  - if, 4-36, A-39
  - Importing Scripts, 4-60
  - incr, A-40
  - info, A-41
  - Inserting Elements into Lists, 4-28
  - Inserting Special Characters, 4-16
  - Instances, definition, 1-6
  - Interface Description Language
    - See Also DCE Package
    - See IDL
  - Invisible Fields, Processing, 10-17, 10-40
- J**
- join, A-44
- K**
- Keyed Lists, 3-3, 3-6, 7-25, 7-40
    - Extracting Values, 3-6
    - keylget, 3-6
    - keylset, 3-2
    - Using to Loading Data, 3-7
  - keylget, 3-6
  - keylset, 3-2
  - Keys, Supplying
    - Argument to xmyUdb, 3-5
    - Using xmyPrompt, 3-5
    - xmyConfig File, 3-4
- L**
- Label Processing, 10-11
  - Labels
    - Finding Position on a 3270 Screen, 10-26
    - Using to Move a Cursor on a 3270 Screen, 10-31
    - Using to Return 3270 Screen Images, 10-32
    - Using to Specify 3270 Screen Location, 10-11
  - Language Events, 2-28
  - lappend, A-45
  - library, A-46
  - Library Path, 6-11
  - index, A-50
  - linsert, A-51
-

- list, A-52
- Lists, 4-2, 4-21 to 4-34
  - Appending, 4-27
  - Concatenating Elements, 4-23
  - Contrast to Arrays, 4-21
  - Converting Between Strings and Lists, 4-33
  - Creating, 4-22 to 4-25
    - Concatenating Elements, 4-23
    - Using the concat Command, 4-23
    - Using the list Command, 4-24
    - Using the set Command, 4-22
  - Elements, 4-21
  - Extracting Elements From, 4-26, 4-30
  - Inserting Elements Into, 4-28
  - Joining Elements into a String, 4-34
  - list Command, 4-24
  - Modifying Lists, 4-27 to 4-30
    - Adding Elements, 4-29
    - Appending, 4-27
    - Extracting Elements, 4-30
    - Inserting, 4-28
    - Replacing Elements, 4-29
  - Number of Elements in a List, 4-25
  - Replacing Elements In, 4-29
  - Searching for Elements, 4-31
  - Sorting, 4-32
  - Splitting Strings into List Elements, 4-33
- llength, A-53
- Loading Extension Packages, 2-14, 7-18
  - FCIF Package, 14-1
  - PRT3270 Package, 13-1
  - TCP Package, 16-1
  - Term3270 Package, 10-1
  - TermAsync Package, 9-1
  - TOP Package, 12-1
- Local Variables, 4-51
- Location
  - General Extensions, 7-2
  - Moving a Cursor on a 3270 Screen, 10-22, 10-24, 10-31
  - Term3270 Attributes, 10-4
  - Term3270 Methods, 10-2
  - TermAsync Attributes, 9-3
- Location of Output Files, 2-16
- Location Processing, 10-9 to 10-13
  - By Labels, 10-11

- By Row and Column, 10-10
- By Tag Names, 10-12
- Formats, 10-27
- Screen Ids, 10-27
- Tag Name Files, 10-12
- TagDir, 10-13
- Logical Operators, 4-9, 4-10
- Looping Commands, 4-38
- Looping Controls, 4-41
  - Terminating Current Iteration, 4-42
  - Terminating Looping Commands, 4-41
- lrange, A-54
- lreplace, A-55
- lsearch, A-56
- lsort, A-57

## M

- Manipulating Strings, 4-53
- Masks
  - Creating, 7-20
  - Destroying, 7-22
  - Disabling, 7-23
    - Term3270 Package, 10-19
    - TermAsync Package, 9-11
  - Enabling, 7-23
    - Term3270 Package, 10-21
    - TermAsync Package, 9-13
  - Listing Mask Handles
    - Term3270 Package, 10-44
    - TermAsync Package, 9-27
  - Regular Expressions, 7-20
- Match Extensions
  - Matching Tcl Procedure, 15-23
  - Multiple Part Messages
    - Waiting For Next Part, 15-27
    - Waiting Until Ending Part, 15-25
  - Receiving Matching Messages, 15-23
  - Receiving Multipart Messages
    - Waiting For Next Part, 15-27
    - Waiting Until Ending Part, 15-25
- Math Functions, 4-14
- Mathematical Functions, 4-13
  - Math Functions, 4-14
  - Trig Functions, 4-13

MaxFailsHandler, 6-13  
Maximum Comparisons, 6-12  
Message Response Directory, 15-13  
    Marking Messages, 15-28  
    *See Also* MsgDir Package  
Methods  
    Definition, 1-3, 1-7  
    Overview  
        Term3270 Package, 10-1  
        TermAsync Package, 9-1  
Model  
    Returning Current Value, 10-44  
    Specifying, 10-17  
MsgDir Package  
    Connections  
        Creating, 15-4  
        Disconnecting, 15-2  
    Data Associated with a Position, 15-5  
    Handles  
        PRT3270 Handle, Creating, 15-18  
        Returning File Name, 15-6  
        Setting Current Time Position,  
            15-14, 15-16  
        Setting Position to First Message,  
            15-7  
        Setting Position to Last Message,  
            15-9  
        Setting to Previous Time Position,  
            15-17  
        TOPCOM Handle, Creating, 15-21  
    Marked Messages, 15-10  
    Maximum Number of Messages, 15-11  
    Message Response Directory, 15-13  
    Move Time Value, 15-12  
    Number of Message Loaded, 15-15  
    Receive Session Number, 15-19  
    *See Also* Match Extensions  
MYNAB System  
    Loading Extension Packages, 7-18  
    Unloading Extension Packages, 7-38

## N

.netrc File, 17-14  
Number Base, 4-7

## O

Objects  
    Getting the Type of, DCE Package, 18-71  
open, A-58  
Opening Files, 4-56  
Operands, 4-7  
    Floating-point Numbers, 4-7  
    Number Base, 4-7  
Operators, 4-8  
    Arithmetic Operators, 4-8  
    Bitwise Operators, 4-10  
    Logical Operators, 4-9, 4-10  
    Precedence, 4-11  
    Relational Operators, 4-9  
Output, 2-16 to 2-24  
    compares File, 2-23  
    Execution Directory Permissions, 3-12  
    File Ownership, 3-12  
    Location of Output Files, 2-16  
        Changing, 2-17  
    Output Directory, 2-18, 6-14  
        compares File, 2-18, 2-23  
        *output* File, 2-18, 2-25  
        *result* File, 2-18  
        *See also* compares File  
        *See also* *output* File  
        *See also* *result* File  
        *See also* SUTImage Files  
        stderr File, 2-18  
        stdout File, 2-18  
        SUTImage Files, 2-18, 2-20  
        *output* File, 2-18, 2-25  
    Ownership Considerations, 3-12  
    Permissions, 2-16  
    *result* File, 2-18  
    Retaining Output Directories, 2-16  
    *See also* Database Output  
    Setting the Output Level, 2-16, 3-14, 6-14  
    SUTImage Files, 2-18, 2-20  
    Writing Screen Attributes to *SUTimages*  
        File, 9-10, 9-29, 10-17, 10-47  
    Writing to the *output* File, 7-24  
Output Directory, 6-14  
*output* File, 2-18, 2-23, 2-25, 7-24  
    Format, 2-25



Output Level  
  Changing, 3-15  
  Current Level, 3-15  
  Setting, 2-16, 3-14, 6-14  
Overview, 16-1

## P

Parent/Child Scripting  
  See Child Script Package  
Pausing Scripts, 7-32  
Performance Measurement Functions, 7-43  
Permissions, 2-16  
pid, A-60  
Port Number  
  Returning, 10-17, 10-45  
  Specifying, 10-17, 10-45  
Printer Testing  
  See PRT3270 Package  
Printing Objects, 18-70  
proc, A-61  
Procedures, 4-50 to 4-52  
  Autoloading, 2-40  
  Conversion runtime, 20-1  
  Creating, 4-50  
  Defined Locally, 2-39  
  Exit Handlers, 6-6  
  Exiting From, 4-51  
  Global Variables, 4-52  
  Loading, 2-39  
  Loading Using Insert Template Dialog,  
    2-40  
  Loading Using the source, 2-39  
  Local Variables, 4-51  
  ProcRepository Parameter, 2-40  
  Timeout Handlers, 6-19  
Prompting for Sensitive Data, 7-25  
Prompts  
  xmytclsh, 4-59  
PRT3270 Package  
  Appending Messages, 13-10  
  Attributes  
    Receive Session Number, 13-22  
    Receive Status, 13-22  
    Receive Time Stamp, 13-23

Comparisons  
  Listen Mode, 13-16  
  Matching Messages, 13-17  
  Specifying Tcl Procedure, 13-17

Connections  
  Creating, 13-5  
  Disconnecting, 13-7  
  Receive Session Number, 13-22  
  Receive Status, 13-22  
  Receive Time Stamp, 13-23  
  Returning a Connection Name,  
    13-20  
  Returning a PRT3270 Handler,  
    13-21  
  Specifying a Connection Name,  
    13-20  
  Specifying a PRT3270 Handler,  
    13-21

Converting Messages, 13-13

### Data

  Appending Messages, 13-10  
  Converting Messages, 13-13  
  Maximum Number of Messages,  
    13-19  
  Receiving, 13-8  
  Receiving Messages  
    File Name, 13-15  
    Last Received, 13-14  
Loading, 7-18, 13-1  
Maximum Number of Messages, 13-19  
Receiving Data, 13-8  
Receiving Messages  
  File Name, 13-15  
  Last Received, 13-14  
Timeout  
  Returning, 13-24  
  Specifying, 13-24

puts, A-62

pwd, A-63

## Q

Quoting, 4-18  
  Using Braces, 4-19  
  Using Double Quotes, 4-18

## R

read, A-64  
regexp, A-65  
Regions, 5-1, 9-7, 10-8  
    Dimension restrictions, 5-2  
    *See Also* Compare Master  
Regular Expressions, 4-54, 7-20, 7-26, 10-13,  
    A-65  
    Searching for, 7-29  
Relational Operators, 4-9  
Removing a Connection  
    Child Script Package, 8-5  
    Term3270 Package, 10-20  
    TermAsync Package, 9-12  
reorder, 14-14  
Replacing Elements in Lists, 4-29  
Reports, *See* Output  
Requests  
    Pausing, 8-6  
    Resuming, 8-7  
    Sending, 8-8  
Responses  
    Buffer Size, 9-10, 9-25  
    Waiting, 9-5  
        Specifying an Initial Read, 10-17,  
        10-42  
        Supplying an Expected Response,  
        10-17, 10-42  
Responses from Applications  
    Returning  
        TermAsync Package, 9-16  
*result* File, 2-18  
Result Object  
    Updating Status, 7-39  
Result Objects, 2-37  
return, A-70  
Returning Current Location, 7-17  
Row/Column Processing, 10-10  
Rows  
    Returning Current Position  
        Term3270 Package, 10-46  
        TermAsync Package, 9-28  
    Using to Move a Cursor on a 3270 Screen,  
    10-31

Using to Return 3270 Screen Images,  
    10-32  
Using to Specify 3270 Screen Location,  
    10-10

RPC Calls  
    Emulated Client, 18-69  
    Emulated Server, 18-72  
    TermAsync Commands, 18-82  
Runtime Object, 2-37  
Runtime Objects  
    ID, 6-15  
    Run Status, 2-37  
    Run Summary, 2-37  
    Tcl Code Status, 2-38

## S

scan, A-72  
Screen Identification File, 10-13, 10-27, 10-46  
    Regular Expressions, 10-13  
    Using Formats, 10-41  
Screen Images  
    Returning  
        Term3270 Package, 10-32  
        TermAsync Package, 9-18  
Screens  
    Returning Size, 9-29  
    Specifying Size, 9-10  
Script Builder  
    Accessing, 2-6  
    Creating Scripts, 2-6  
    Displaying Remote Session Connections,  
    2-9  
    Executing Scripts, 2-8  
    Insert Template Dialog, 2-40  
    Using to Prompt for Sensitive Data, 3-1  
Script Dispatchers  
    *See* SDs  
Script Engines  
    *See* SEs  
Script Events, 2-29  
Script Names, Returning Name of Script Being  
    Executed, 6-15  
Script Objects  
    Creating Scripts, 2-4

- Insert Template Dialog, 2-40
- Script Terminations
  - Maximum Allowed Failed Comparisons, 6-12
- Scripts
  - Concealing Sensitive Data, 3-1, 7-40, 7-42
  - Obtaining From Scripts in the Background, 3-2
  - Prompting Using the Script Builder, 3-1
  - Controlling the Execution of, 4-36
    - break Command, 4-41
    - continue Command, 4-42
    - eval Command, 4-45
    - for Command, 4-39
    - foreach Command, 4-40
    - if Command, 4-36
    - switch Command, 4-43
    - while Command, 4-38
  - Creating
    - Overview, 2-1
    - Using an Editor, 2-3
    - Using Script Objects, 2-4
    - Using the Script Builder, 2-6
  - Debugging, 3-9, 4-46
    - catch Command, 4-46
  - Executing
    - Effect on Symbol Tables, 2-15
    - eval Command, 4-45
    - Interactively, 4-59
    - Overview, 2-2
    - Using the Script Builder, 2-8
  - Executing Without Database Update, 2-39
  - Exiting From, 7-3, 7-16
    - Exit Handler, 7-16
    - Specifying an Exit String, 7-16
  - Hints for Creating, 3-1 to 3-20
  - Importing, 4-60
  - Name of File Being Executed, 6-15
  - Pausing, 7-32
  - Receiving Data at Execution, 7-25
  - Runtime Objects ID, 6-15
  - Sending Child Script Requests, 8-8
  - Specifying an Exit String, 7-16
  - Submitting
    - From the CLUI, 2-11
    - From the GUI, 2-12
  - Terminating, 3-16
    - Exit Handler, 6-6
    - Using UNIX Commands, 3-20
  - SDs, 2-10
    - Specifying for Child Script Package, 8-2
  - SE Groups, 2-10, 6-16
    - Specifying for Child Script Package, 8-2
  - Searching for Elements in Lists, 4-31
  - Searching for Regular Expressions, 7-29
  - seek, A-74
  - SEs, 2-10
    - Background, 2-10, 6-5
      - Displaying User Name Passed in Execution Request, 6-16
      - Using UNIX Commands in Scripts, 3-20
    - Command-line, 2-13, 2-15, 6-5, 6-16
      - Displaying Name of Person Starting an SE, 6-16
      - Using UNIX Commands in Scripts, 3-20
    - ConnOnly Mode, 6-4
      - Effect of Exceptions, 3-9
    - Database Mode, 6-3
    - Embedded, 2-10, 6-5, 6-16
      - Displaying Name of Person Starting an SE, 6-16
      - Using UNIX Commands in Scripts, 3-20
    - Execution Modes
      - ConnOnly, 2-14, 6-4
      - FullState, 2-14, 2-15, 6-4
      - StateLess, 6-4
      - Stateless, 2-14
    - FullState Mode, 6-4
    - Groups, 6-16
    - Library Path, 6-11
    - StateLess Mode, 6-4
      - Effect of Exceptions, 3-9
  - set, 4-3, A-75
  - set Command
    - Used to Create Lists, 4-22
  - Sorting Lists, 4-32
  - source, A-76
  - source Command, 4-60

Special Characters  
  Inserting, 4-16  
  Suppressing, 4-18  
split, A-77  
Stateless Mode, 2-14  
  Effect of Exceptions, 3-9  
stdio  
  Input/output Functions, 4-55  
  *See Also* Files  
string, A-78  
Strings, 4-2  
  Converting Between Strings and Lists,  
    4-33  
  Creating from List Elements, 4-34  
  Globbing, 4-53  
  Manipulating, 4-53  
  Matching, 4-53  
  Regular Expressions, 4-54, A-65  
  Setting, 4-3  
  Splitting into List Elements, 4-33  
  Unsetting, 4-3  
Substitution, 4-15  
  Backslash, 4-16  
  Command, 4-15  
  Variables, 4-15  
Summary Events, 2-30  
Suppressing, 4-19  
Suppressing Variable Substitution, 4-19  
SUT, 1-3  
SUT Timing (suttiming) Events, 2-32  
Sutimage Events, 2-31  
SUTimage Files, 2-18, 2-20  
  Format, 2-20  
switch, A-80  
Symbol Tables, 2-15  
  Adding Variables to a Table, 7-37  
  Changing Variables in a Table, 7-37  
  Deleting a Variable in a Table, 7-34  
  Returning Entire Table, 6-17  
  Returning the Value of a Variable, 7-36  
  Seeing if a Variable Exists in a Table,  
    7-35  
Synchronizing Concurrently Executing Scripts,  
  2-10  
  *See also* Concurrency

Synchronous Terminal Screen Locations  
  *See* Location Processing  
Synchronous Terminals  
  *See* Term3270 Package  
System Prompt  
  Setting, 9-10, 9-28  
System Prompts, 9-4  
System Shell, Setting, 9-10, 9-28  
System Under Test, 1-3

## T

Tag Name Files, 10-12  
Tag Name Processing, 10-12  
Tag-value Pairs, 3-3, 3-7  
TagDir, 10-13  
  Specifying, 10-17, 10-47  
Tags  
  Finding Screen Locations, 10-27  
  Using to Move a Cursor on a 3270 Screen,  
    10-31  
  Using to Return 3270 Screen Images,  
    10-32  
  Using to Specify 3270 Screen Location,  
    10-12  
Tcl  
  Arrays, 4-21, 4-35  
  Backslash Sequences, 4-17  
  Basic Concepts and Definitions, 4-2  
  Comments, 4-20  
  Control Flows, 4-36 to 4-45  
    break Command, 4-41  
    continue Command, 4-42  
    eval Command, 4-45  
    for Command, 4-39  
    foreach Command, 4-40  
    if Command, 4-36  
    switch Command, 4-43  
    while Command, 4-38  
  Controlling the Flow of Execution of a  
    Script, 4-36  
    *See Also* Control Flows  
  Converting Between Strings and Lists,  
    4-33  
  Deferring Evaluation, 4-19  
  Error Global Variables, 4-47

- Error Information Procedures, 3-9, 4-46
- Escape Sequences, 4-17
- Events, 4-5
- Exceptions, 4-46
- Expressions, 4-4, 4-7 to 4-14
  - Conversion, 4-14
  - Mathematical Functions, 4-13
    - Math Functions, 4-14
    - Trig Functions, 4-13
  - Operands, 4-7
  - Operators, 4-8
    - Arithmetic Operators, 4-8
    - Bitwise Operators, 4-10
    - Logical Operators, 4-9, 4-10
    - Precedence, 4-11
    - Relational Operators, 4-9
- Extensions to, 1-3
- Floating-point Numbers, 4-7
- Introduction, 1-1
- Lists, 4-2, 4-21 to 4-34
  - Converting Between Strings and Lists, 4-33
  - Creating, 4-22 to 4-25
    - Concatenating Items, 4-23
    - Using the concat Command, 4-23
    - Using the list Command, 4-24
    - Using the set Command, 4-22
  - Extracting Elements From, 4-26
  - Joining Elements into a String, 4-34
  - Modifying Lists, 4-27 to 4-30
    - Adding Elements, 4-29
    - Appending, 4-27
    - Extracting Elements, 4-30
    - Inserting, 4-28
    - Replacing Elements, 4-29
  - Number of Elements in a List, 4-25
  - Searching for Elements, 4-31
  - Sorting, 4-32
  - Splitting Strings into List Elements, 4-33
- Looping Commands, 4-38
- Looping Controls, 4-41
  - Terminating Current Iteration, 4-42
  - Terminating Looping Commands, 4-41
- Number Base, 4-7
- Obtaining a List of Previous Commands, 4-5
- Operators, 4-8
  - Arithmetic Operators, 4-8
  - Bitwise Operators, 4-10
  - Logical Operators, 4-9, 4-10
  - Precedence, 4-11
  - Relational Operators, 4-9
- Procedures, 4-50 to 4-52
  - Creating, 4-50
  - Exit Handlers, 6-6
  - Exiting From, 4-51
  - Global Variables, 4-52
  - Local Variables, 4-51
- Quoting, 4-18
- set Command, 4-3
- Sorting Lists, 4-32
- Strings, 4-2
  - Converting Between Strings and Lists, 4-33
- Substitution
  - Backslash, 4-16
  - Command, 4-15
  - Variables, 4-15
- Suppressing Special Characters, 4-18
- Syntax, 4-15 to 4-20
  - Comments, 4-20
  - Quoting, 4-18
    - Using Braces, 4-19
    - Using Double Quotes, 4-18
  - Substitution, 4-15
    - Backslash, 4-16
    - Command, 4-15
    - Variables, 4-15
- unset Command, 4-3
- Variables, 4-2
  - Append, 4-5
  - Creating, 4-3
  - Increasing the Value of, 4-4
  - Removing, 4-3
- Tcl Commands, Basic
  - append, A-2
  - array, A-3
  - break, A-5
  - case, A-6
  - catch, A-7
  - cd, A-8
  - close, A-9
  - concat, A-10
  - continue, A-11

- eof, A-12
  - error, A-13
  - eval, A-14
  - exec, A-15
  - exit, A-18
  - expr, A-19
  - file, A-24
  - flush, A-27
  - for, A-28
  - foreach, A-29
  - format, A-30
  - gets, A-33
  - glob, A-34
  - global, A-35
  - history, A-36
  - if, A-39
  - incr, A-40
  - info, A-41
  - join, A-44
  - lappend, A-45
  - library, A-46
  - lindex, A-50
  - linsert, A-51
  - list, A-52
  - llength, A-53
  - lrange, A-54
  - lreplace, A-55
  - lsearch, A-56
  - lsort, A-57
  - open, A-58
  - pid, A-60
  - proc, A-61
  - puts, A-62
  - pwd, A-63
  - read, A-64
  - regexp, A-65
  - return, A-70
  - scan, A-72
  - seek, A-74
  - set, A-75
  - source, A-76
  - split, A-77
  - string, A-78
  - switch, A-80
  - tclvars, A-82
  - tell, A-85
  - time, A-86
  - trace, A-87
  - unknown, A-90
  - unset, A-91
  - uplevel, A-92
  - upvar, A-93
  - while, A-94
  - tclvars, A-82
  - TclX, 1-1
    - Help Facility, 1-2
  - TCP Package, 16-1
    - Appending Messages, 16-15
    - Attributes
      - Receive Time Stamp, 16-32
    - Comparisons
      - Listen Mode, 16-24
      - Matching Messages, 16-26
      - Specifying Tcl Procedure, 16-26
    - Connections
      - Accepting, 16-5
      - Creating, 16-7, 16-23
      - Deleting, 16-9
      - Disconnecting, 16-10
      - Receive Time Stamp, 16-32
      - Receiving messages, 16-11
      - Returning a Connection Name, 16-29
      - Sending, 16-13
      - Specifying a Connection Name, 16-29
    - Creating connection, 16-23
    - Data
      - Appending Messages, 16-15
      - Creating connection, 16-23
      - Receiving Messages
        - File Name, 16-22
        - Last Received, 16-21
      - Receiving messages, 16-18
      - Specifying application name, 16-17
    - Listing Open Connections, 16-19
    - Loading, 16-1
    - Receiving Messages
      - File Name, 16-22
      - Last Received, 16-21
    - Receiving messages, 16-18
    - Specifying application name, 16-17
  - Telexel Channel Names
    - Channel Names, 6-1
  - tell, A-85
-

- 
- Term3270 Package
    - Attribute Definitions, 10-6
    - Attributes Overview, 10-3
    - Columns
      - Returning Current Position, 10-39
    - Compared Files, Carriage Returns in, 7-12
    - Comparing a Region, 10-14
    - Comparisons
      - Ignoring a Region on a 3270 Screen, 10-29
      - Number of Failed, 10-41
      - Number of Successful, 10-41
      - Number of Warnings, 10-48
    - Connections
      - Returning a Connection Name, 10-17, 10-45
      - Specifying a Connection Name, 10-17, 10-45
      - State, 10-46
      - Status, 10-47
    - Creating a Connection, 10-16
    - Data
      - Returning Number of Bytes Received, 10-40
      - Sending to an Application, 10-36
      - Waiting for Responses, 10-37
    - Disconnecting a Connection, 10-20
    - Fields on a 3270 Screen
      - Moving to a Specified Field, 10-22
      - Moving to the Next Field, 10-24
      - Returning the Length of a Field, 10-23
    - Finding Data on a Screen, 10-25
    - Function Keys
      - Counting Number Pressed, 10-43
      - Counting Usage of, 10-17, 10-39
      - Last Key Pressed, 10-43
      - Simulating, 10-34, 10-35
    - Host
      - Returning Current Host Name, 10-42
      - Specifying, 10-16
    - Invisible Fields, 10-17, 10-40
    - Label Processing, 10-11
    - Listing Mask Handles, 10-44
    - Listing Open Connections, 10-40
    - Listing Valid Attribute Values, 10-30
    - Loading, 7-18, 10-1
    - Location Processing, 10-9 to 10-13
      - By Labels, 10-11
      - By Row and Column, 10-10
      - By Tag Names, 10-12
      - Formats, 10-27
      - Screen Ids, 10-27
      - Tag Name Files, 10-12
      - TagDir, 10-13
    - Methods Overview, 10-1
    - Model
      - Returning Current Value, 10-44
      - Specifying, 10-17
    - Moving a Cursor, 10-22, 10-24, 10-31
    - Output
      - Writing Screen Attributes to *SUTimages File*, 10-17, 10-47
    - Port Number
      - Returning, 10-17, 10-45
      - Specifying, 10-17, 10-45
    - Returning Attribute Values, 10-28
    - Returning Current Host Name, 10-42
    - Returning Number of Bytes Received, 10-40
    - Row/Column Processing, 10-10
    - Rows
      - Returning Current Position, 10-46
    - Screen Identification File, 10-13, 10-46
    - Screen Images, 10-32
    - Simulating Pressing a 3270 Function Key, 10-34, 10-35
    - Specifying, 10-16
    - Tag Name Processing, 10-12
    - TagDir
      - Specifying, 10-17, 10-47
    - Timeout
      - Returning, 10-17, 10-48
      - Specifying, 10-17, 10-48
    - TN3270E, 10-17, 10-48
    - Waiting for Responses, 10-37
      - Specifying an Initial Read, 10-17, 10-42
      - Supplying an Expected Response, 10-17, 10-42
  - TermAsync Package
    - Attributes Overview, 9-2
    - Buffer Size, 9-10, 9-25
    - Columns, Returning Current Position, 9-25
-

- Comparing a Region, 9-7
- Comparisons
  - Number of Failed, 9-26
  - Number of Successful, 9-27
  - Number of Warnings, 9-30
- Concealing Data in *SUTimages* Files, 3-8
- Connections
  - Returning a Connection Name, 9-10, 9-27
  - Specifying a Connection Name, 9-10, 9-27
  - Status, 9-29
- Creating a Connection, 9-9
- Data
  - Delaying Sending to an Application, 9-10, 9-26
  - Sending to an Application, 9-20, 9-22
  - Waiting for Responses, 9-22, 9-23
- Disconnecting a Connection, 9-12
- Emulated Terminal, 9-9, 9-30
- Listing Mask Handles, 9-27
- Listing Open Connections, 9-26
- Listing Valid Attribute Values, 9-15
- Loading, 7-18, 9-1
- Methods Overview, 9-1
- Output
  - Concealing Data in *SUTimages* Files, 3-8
  - Writing Screen Attributes to *SUTimages* File, 9-10, 9-29
- Responses from Applications, returning, 9-16
- Returning Attribute Values, 9-14
- Rows, Returning Current Position, 9-28
- Screen Images, 9-18
- Screens
  - Returning Size, 9-29
  - Specifying Size, 9-10
- Sending Data to an Application, 9-20, 9-22, 10-36
- Setting System Shell, 9-10, 9-28
- System Prompts, 9-4
- Timeout
  - Returning, 9-9, 9-30
  - Specifying, 9-9, 9-30
- Waiting for Responses, 9-5, 9-22, 9-23
- Wildcards, 9-10, 9-31
- Terminating Scripts, 3-16
- Terminfo File
  - TermAsync Package
    - Terminfo File, 9-10, 9-30
- Test Object Events, 2-32
- Tests
  - Beginning a Test, 7-4
  - Delimiting, 7-4, 7-15
  - Ending a Test, 7-15
  - Version IDs, 6-18
- time, A-86
- Time Functions, 7-8
- Timeout
  - Returning, 8-2, 9-9, 9-30, 10-17, 10-48, 12-33, 13-24
  - Specifying, 8-2, 9-9, 9-30, 10-17, 10-48, 12-33, 13-24
  - Specifying a Handler, 6-19
- TimeoutHandler, 6-19
- TN3270E, 10-17, 10-48
- TOP Package
  - Appending Messages, 12-12
  - Attributes
    - Receive Session Number, 12-27
    - Receive Status, 12-28
    - Receive Time Stamp, 11-29, 12-29
    - Send Session Number, 12-30
    - Send Status, 12-31
    - Send Time Stamp, 12-32
- Comparisons
  - Listen Mode, 12-19
  - Matching Messages, 12-21
  - Specifying Tcl Procedure, 12-21
- Connection ID, 16-20
- Connections
  - Creating, 12-5
  - Disconnecting, 12-7
  - DTN, Defining, 12-17
  - PSN, Defining, 12-26
  - Receive Session Number, 12-27
  - Receive Status, 12-28
  - Receive Time Stamp, 11-29, 12-29
  - Returning a Connection Name, 11-26, 12-25
  - Returning a TOPCOM Handler, 12-34



- Send Session Number, 12-30
- Send Status, 12-31
- Send Time Stamp, 12-32
- Specifying a Connection Name,  
11-26, 12-25
- Specifying a TOPCOM Handler,  
12-34
- Converting Messages, 12-15
- Data
  - Appending Messages, 12-12
  - Converting Messages, 12-15
  - Maximum Number of Messages,  
12-23
  - Maximum Segment Length, 12-24
  - Receiving, 12-8
  - Receiving Messages
    - File Name, 12-18
    - Last Received, 12-16
  - Sending, 12-10
    - Message size, 12-10
- Destination Transaction Name (DTN),  
12-17
- Listing Open Connections, 12-14
- Loading, 7-18, 12-1
- Maximum Number of Messages, 12-23
- Maximum Segment Length, 12-24
- Message size, 12-10
- Presentation Services Name (PSN), 12-26
- Receiving Data, 12-8
- Receiving Messages
  - File Name, 12-18
  - Last Received, 12-16
- Sending Data, 12-10
  - Message size, 12-10
- Timeout
  - Returning, 12-33
  - Specifying, 12-33

trace, A-87

Trig Functions, 4-13

## U

- UNIX
  - Commands in Scripts, 3-20
- unknown, A-90
- Unloading Extension Packages, 7-38

- unset, A-91
- unset Command, 4-3
- uplevel, A-92
- upvar, A-93
- User Events, 2-33

## V

- Variable Substitution, 4-19
- Variables, 4-2, 4-15
  - Addng Variables to a Symbol Table, 7-37
  - Appending, 4-5
  - Changing Variables in a Symbol Table,  
7-37
  - Creating, 4-3
  - Deleting in Symbol Tables, 7-34
  - Elements in Arrays, 4-35
  - Existing in Symbol Tables, 7-35
  - Global, 4-51, 4-52
    - global Command, 4-52
  - Increasing the Value of, 4-4
  - Local, 4-51
  - Removing, 4-3
  - Symbol Tables, 7-36

## W

- Waiting
  - Batch Package, 17-13
  - Child Script Package, 8-9
  - Completing all Child Scripts, 8-11
  - Completing any Child Scripts, 8-12
  - General Extensions, 7-2
  - Term3270 Methods, 10-2
  - TermAsync Attributes, 9-3
  - TermAsync Methods, 9-2
- Waiting for Responses
  - Setting the System Prompt, 9-10, 9-28
  - Specifying an Initial Read, 10-17, 10-42
  - Supplying an Expected Response, 10-17,  
10-42
    - TermAsync Package, 9-5
- while, 4-38, A-94
- Wildcards, 9-10, 9-31
- Writing Output, 7-24

## X

- xmyCmd, 3-2
  - scramble, 3-3
  - submit
    - Output Files, 3-12
- xmyPrint, 2-33
- xmyPrompt
  - Supplying Encryption Key, 3-5
  - Using to Prompt for Sensitive Data, 3-1,  
7-25
  - Using to Receive Data, 7-25
- xmySE
  - See Child Script Package
- xmytcsh, 2-2, 2-12, 4-59
  - Prompt, 4-59
  - Used for Examples, 4-2
  - Using source Command, 4-60
- xmyUdb, 3-2, 3-3
  - Loading Keyed Lists, 3-6
  - Supplying Encryption Key, 3-5
- xmyVar Array, 6-1 to 6-21
  - Comparisons
    - Failed, 6-8
    - Good, 6-10
    - Maximum, 6-12
    - Warnings, 6-21
  - Database Mode, 6-3
  - Engine Modes, 6-4
  - Engine Types, 6-5
  - Exit Handler, 6-6
  - Library Path, 6-11
  - Maximum Failed Comparisons Exit  
Handler, 6-13
  - Name of Script Being Executed, 6-15
  - Output Directory, 6-14
  - Output Level, 6-14
  - Runtime Objects ID, 6-15
  - SE Group, 6-16
  - Symbol Tables
    - Returning Entire Table, 6-17
  - Test Version IDs, 6-18
  - Timeout Handler, 6-19
  - Updating Comparison Counters, 6-20
  - User Submitting/Starting a Process, 6-16